

Model: OTM-VPA60-DIP

Input Voltage:	120-277V AC
Input Current:	0.78A
Frequency:	50-60 Hz
Output Voltage:	3-65V DC
Output Current:	600mA~2100mA
Max Power:	60W
Dimensions L x W x H:	180mm x 62mm x 24.2mm
IP Rating:	IP20 (Dry and Damp Locations)
Dimmable:	Yes (5 in 1 Dimming)
Wiring/Housing:	Hardwire
Class Certification:	Class P
Standards:	cUL/SELV/RoHs


Job Name: _____

Distributor: _____


Type: _____




Installation Diagram (with 0-10V Dimmers)

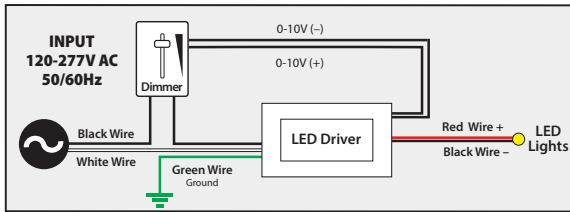

(with Triac and Phase-cut Dimmers)

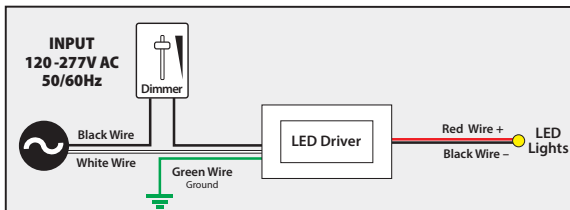


(Direct Wiring)

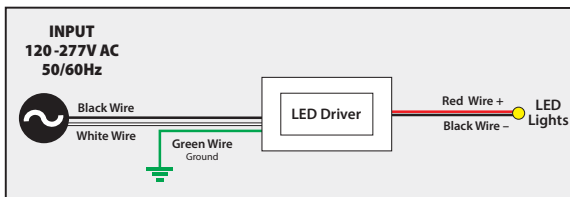

Dimming

Veroboard 0-10V Dimming Constant Voltage LED Driver Works with 0/1-10V dimmers. The dimmers use a low voltage 0-10V DC single connected to the LED power supply.

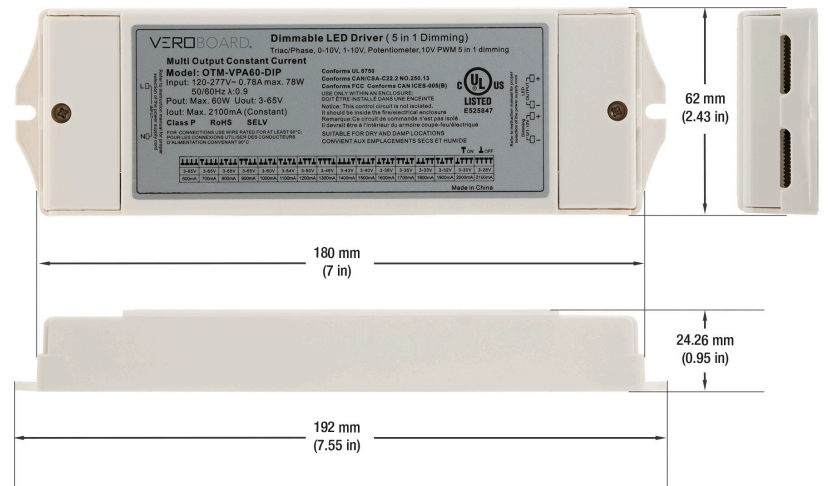

T ON L OFF															
3-65V	3-65V	3-65V	3-65V	3-60V	3-54V	3-50V	3-46V	3-43V	3-40V	3-38V	3-35V	3-33V	3-32V	3-30V	3-28V
600mA	700mA	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA	1600mA	1700mA	1800mA	1900mA	2000mA	2100mA



**120-277V
60W
CLASS P**

SKU: 666561433772