

Aero One



WATCH MANUAL



AERONOM®

Aero One

WATCH MANUAL

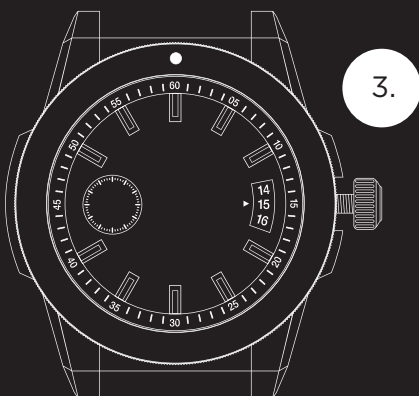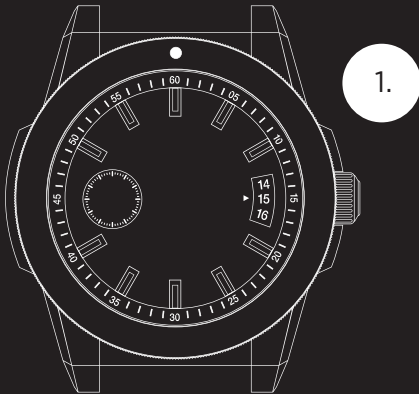

1.
Before you can start, you must unscrew the screw-down crown by unscrewing it from the thread. Turn the crown counterclockwise until you feel that the resistance is loosened. Now the crown is in **position 2**.

2.
The next step is to wind your timepiece. To do this, turn the crown (in **position 2**) clockwise about 15 times. You will notice that the mechanism in the movement moves and you will hear a slight whirring sound. The hands will start to move.

3.
Now you can set the time. To do this, pull the crown to **position 3** and turn until the hands are in the correct position. **Note:** Make sure that the small hour display, is set to the correct hour, so your date changes at night.

4.
To set the date, push the crown in one position so that it is in **position 2**. Turn the crown clockwise until the correct date is displayed.

5.
To fix the crown in the go use position again, move it to **position 2**. With a little counterpressure and simultaneous Turn it clockwise and tighten it in the thread. Keep screwing until the crown does not move any further.

Aero One

WATCH MANUAL

PRODUCT NAME	AERO ONE - BLK
TYPE	Minimal Explorer Watch
WATER RESISTANCE	100m = 10atm WR
ORIGIN	Made in Germany
TESTING	Tested for accuracy & water resistance
EDITION	Individually numbered, edition of 200
BEZEL DIAMETER	41,5mm, with 1,8mm black diamond
BEZEL	120 clicks mono-directional
CASE SIZE	46mm
CASE MATERIAL	316L stainless steel
CASE FINISHING	DLC-Coated and polished finish
LUGS / STRAP SIZE	22mm
CASEBACK	Open Heart, screwed caseback
CROWN	7mm screw-down crown
LENS DESCRIPTION	2.5mm thick double domed sapphire
LENS TREATMENT	Inner side anti-reflective coating
DIAL BASE COLOR	Dark grey matte high-readability
LUMINOUS COLOR	Super-LumiNova® GL
DATE	Tripple-Date window
HANDS	Mountain Cut with Super-Luminova® GL
CALIBER TYPE	Automatic Caliber Miyota 8217
CALIBER FREQUENCY	21600 bph
CALIBER WINDING	Automatic + handwinding
CALIBER JEWELS	21
ACCURACY	-10/+20 seconds per day
POWER RESERVE	42 hours
ANTIMAGNETISM	Antimagnetic 4800 A/m
STRAP BASE	22mm Tank Strap, 316 stainless steel
STRAP EXTRA	Butterfly-Clasp
PRODUCT KIT	AERONOM®-Box, warranty card