

Acrylic Clawfoot

Read the instructions below and follow all local plumbing and building codes.

Unpack and inspect your new feet for any shipping damages and ensure no pieces are missing.

If any damages are discovered DO NOT INSTALL.

Please contact customer service at 1(866)448-Tubs. You may also call our customer service for any other assistance with our products.

Before installing it is suggested to have a blanket or soft surface to avoid scratches while the tub is turned upside down while attaching the feet.

TOOLS AND MATERIALS NEEDED :

(1) Long Bracket	(2) Short Brackets	(4) Bolts	(10) Nuts	(10) Washers
17mm & 19mm Sockets		Socket Wrench		

NOTE : This particular tub requires 3 brackets; 2 around the drain and 1 across the back end. STEPS 1-5 are steps to be taken for the brackets closest to the drain. STEPS 6-10 are for the single bracket on the back end of the tub. STEPS 11-14 include the installation of the clawfoot once the brackets have been added.

1. While the tub is upside down, take off the plastic caps at each foot location covering screw threads. There will be 1 washer and 1 nut underneath the plastic caps. Take each of these off.



2. Place the 2 small brackets down so that the screws are protruding from the 2 elongated holes in each bracket and center them evenly.



3. By hand, thread 1 of each washer and nut down onto all 4 bolt threads.



4. Taking one of the clawfeet, line the threaded hole in the bracket up with the hole on the back of the leg and ensure that it will fit properly. The bracket can be adjusted slightly if needed.



5. When you've made sure the bracket is in the proper position for the installation, tighten down both nuts with a 17mm socket.




6. While the tub is upside down, take off the plastic caps at each foot location covering screw threads. There will be 1 washer and 1 nut underneath the plastic caps. Take each of these off.



7. Place the long bracket down so that two screws are protruding from the 2 elongated holes in the bracket and center the bracket evenly.



8. Thread the washer and nut down on both ends of the bracket, but only hand tighten these for now.

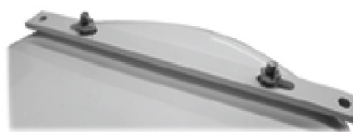

9. Taking one of the clawfeet, line the threaded hole in the bracket up with the hole on the back of the leg and ensure that it will fit properly. The bracket can be adjusted slightly if needed. -Repeat for opposite leg



10. When you've made sure the bracket is in the proper position for the installation, tighten down both nuts with a 17mm socket.



11. Supplied is a washer and bolt for each leg. Place 1 large washer on a nut, this will be needed in later steps.



12. To attach the clawfoot, place it on the tub and line the threaded hole on the bracket to the elongated hole on the back of the clawfoot.



13. Take the nut with a washer on it that was prepared in the steps previously and hand tighten the leg down.

(Be sure the leg fits properly and is level before continuing)



14. Once the leg is positioned and leveled for installation, tighten the bolt down with a 19mm Socket.

REPEAT STEPS 11-14 FOR EACH REMAINING CLAWFOOT

NOTE :
Each leg has an adjustable leveler for any adjustments needed. The nut to make the adjustments is 17mm.



CONTACT US:
Cambridge-Plumbing.com
TOLL FREE: 866-448-8827
Sales@Cambridge-Plumbing.com