

E L E C T R I C S C O O T E R

NANROBOT

WWW.NANROBOT.COM

USER MANUAL

OFFICIAL SITE: WWW.NANROBOT.COM
EMAIL: SUPPORT@NANROBOT.COM

LS7+

This manual contains important information to help you use your product more safely

NANROBOT



Manufacture: shanghai duochuang intelligent technology co.,ltd

Website: www.nanrobot.com

FB:Nanrobot Electric Scooters

CONTENTS

General Guidelines	3
Safety Guidelines	4
Product Specifications	5
Product Components	6
Safety Guidelines Before Riding	7
Unboxing	8-10
Handlebar Unfolding	11
Handlebar Folding	12
Charging & Range	13
Handlebar Controls	14
Control Panel	15
Parameter Settings	16-17
Remote control for light	18
Maintenance & FAQ	19
Customer Support	20
Warranty Guarantee	21

**REQUIRED CHECK BEFORE RIDING****WARNING!**

Please read this manual carefully before using the product.

CHECK THE SCOOTER BEFORE RIDING**CHECK THE SCOOTER BEFORE RIDING**

1. Check that the control panel turns on.
2. Ensure that the brakes are working properly.
3. Check that the brake pads are not damaged or need replacing.
4. Make sure the seat is stable and secure.
5. Check that the horn is operating correctly.
6. Ensure the switch for Eco and Turbo mode switch are working normally.
7. Make sure the voltage value is within the normal range of 43V-58.8V.
8. Make sure the folding mechanism is in good condition and operational.
9. Prolonged Exposure to UV Rays, Rain and the Elements May Damage the Enclosure Materials, Store Indoors When Not in Use.
10. WARNING-To reduce the risk of injury, user must read instruction manual.
11. WARNING-Risk of Fire and Electric Shock-No User Serviceable Parts.



SAFETY GUIDELINES

SAFETY PRECAUTIONS

1. Always wear a helmet and knee and elbow pads when riding.
2. When first riding the scooter maintain a low speed and slowly increase speed as riding skills improve.
3. Do not ride the scooter on rainy days.
4. Riding through puddles is not recommended.
5. Children under the age of 16 are prohibited from riding.
6. The handlebar should be adjusted to an appropriate and comfortable position.
7. When going downhill, ensure you are driving slowly to avoid accidents.
8. Obey all traffic rules.
9. Ensure all screws are in condition and appropriately fastened.
10. Charging Instructions-Use only with specified charger in instruction.
11. The slope of riding: $<30^{\circ}$.
12. The range of The environment temperature when riding or charging: $0-40^{\circ}\text{C}$.
13. Store in a cool, dry and ventilated place when not in use.
14. Don't throw it away arbitrarily when it's break.



PRODUCT SPECIFICATIONS

ELECTRIC SCOOTER SPECS

MODEL	NANROBOT LS7+
NET WEIGHT	88 LBS/40KG
PACKING SIZE	1480*380*640 MM
CHARGING TIME	10-12H
WHEEL DIAMETER	11 INCH
RANGE	31-37 MILES
MAXIMUM SPEED	110KMH
MAXIMUM WEIGHT	MAX 330LBS
INPUT	40A
LITHIUM BATTERY	60V 40A
MOTOR	2400*2W



PRODUCT COMPONENTS

NANROBOT LS7+



25-ECO TURBO
Single/Dual

1-Control panel

2-Front brake lever

7-Folding knob

8-Head light

9-Front shock absorber

10-Front fender

11-Brake calliper

12-Front motor

13-Brake disc

14-Fisheye light

15-Charging port

16-Kickstand

3-Power lock

4-Light/Horn buttons

5-Grip

6-Rear brake lever

17-Rear shock absorber

18-Rear fender

19-Brake calliper

23-Damper

24-Atmosphere lamp

20-Brake disc

21-Rear motor

22-Taillight

**SAFETY GUIDELINES BEFORE RIDING****CHECK THE FOLLOWING PARTS OF THE PRODUCT AFTER UNBOXING**

1. Check if there is a tool kit.
2. Check for a charger.
3. Check if there is a voltage lock key.
4. All nuts and screws should be tight.
5. Seat (if available).
6. Test the brakes.

PACKING LIST

X 1



X 1



X 2



X 1



X 1



X 1



UNBOXING

IMPORTANT CHECKLIST




Check whether the LCD control panel screws are tightened.



Make sure the voltage lock and light button screws are tightened.



Check whether the brake lever screws and Single/dual drive controller are`s screw are tightened.

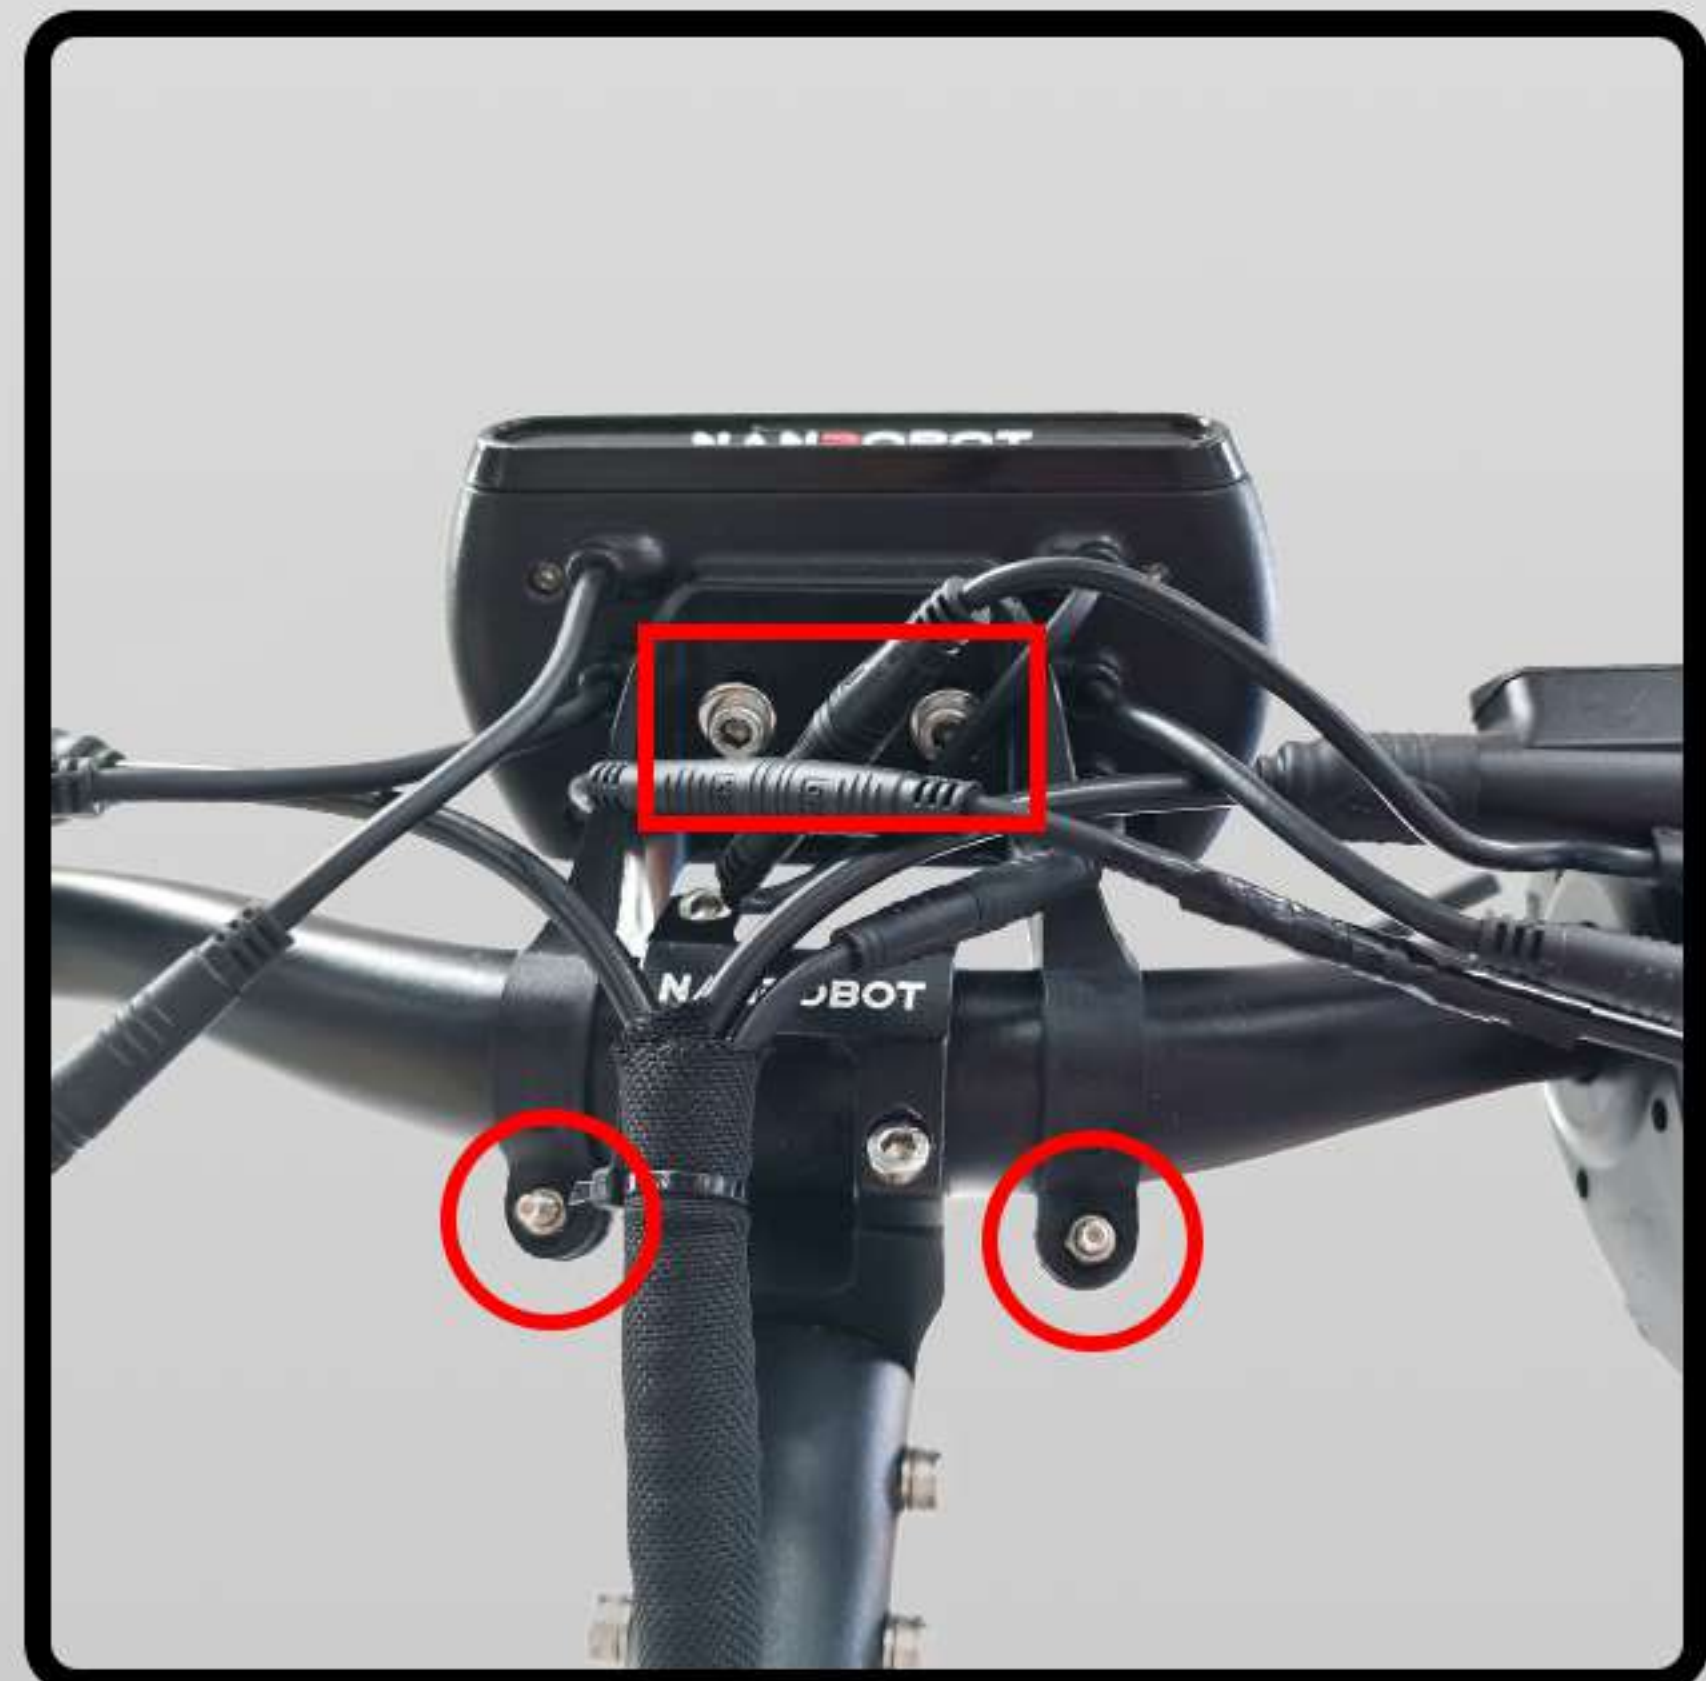

Check whether the bracket screws are tightened.



UNBOXING

HANDLEBAR ASSEMBLY



① Loosen the screws on the handle mount with a hex wrench, which is included in the basic tool kit.



② After aligning the handlebar with the center mount, replace the cover mount, and tighten the fixing bolt.



③ Progressively tighten the bolts in sequential order (1 to 4), ensuring equal tension balance between the mount and handlebar.




④ Installation complete.



UNBOXING


DAMPER ASSEMBLY

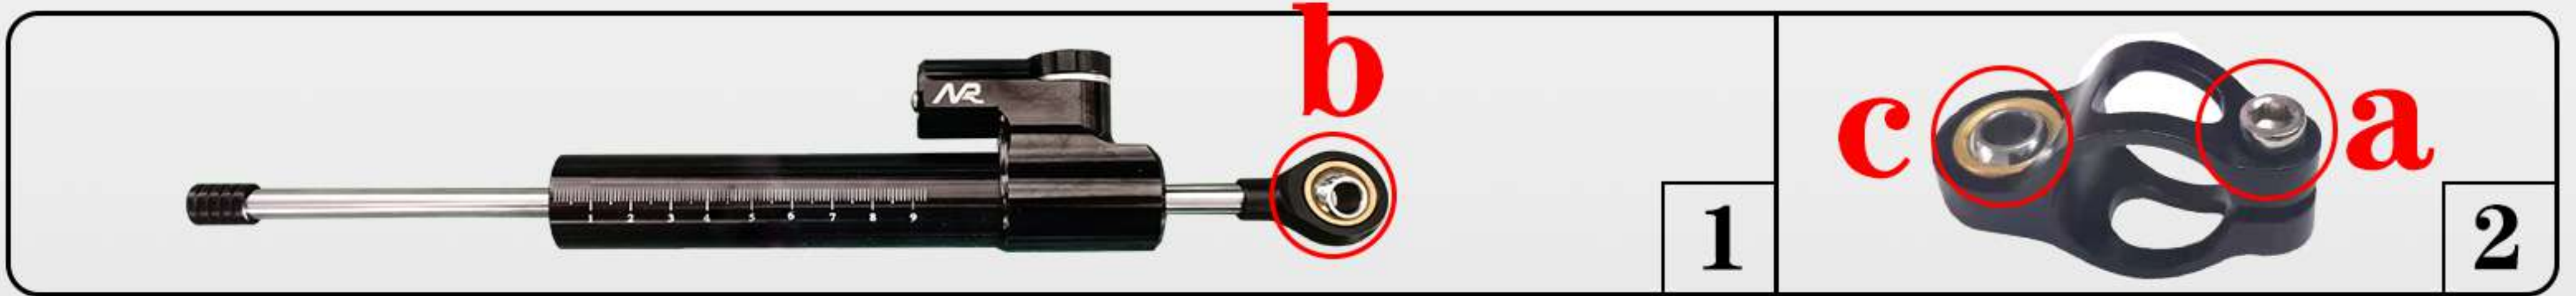

① Loosen the screws "a" on the loop "2" with a hex wrench, and then put the damper "1" in. Don't tighten the fixing bolt "a".



② Aligning the damper with the center mount, and then tighten the fixing bolt "b".

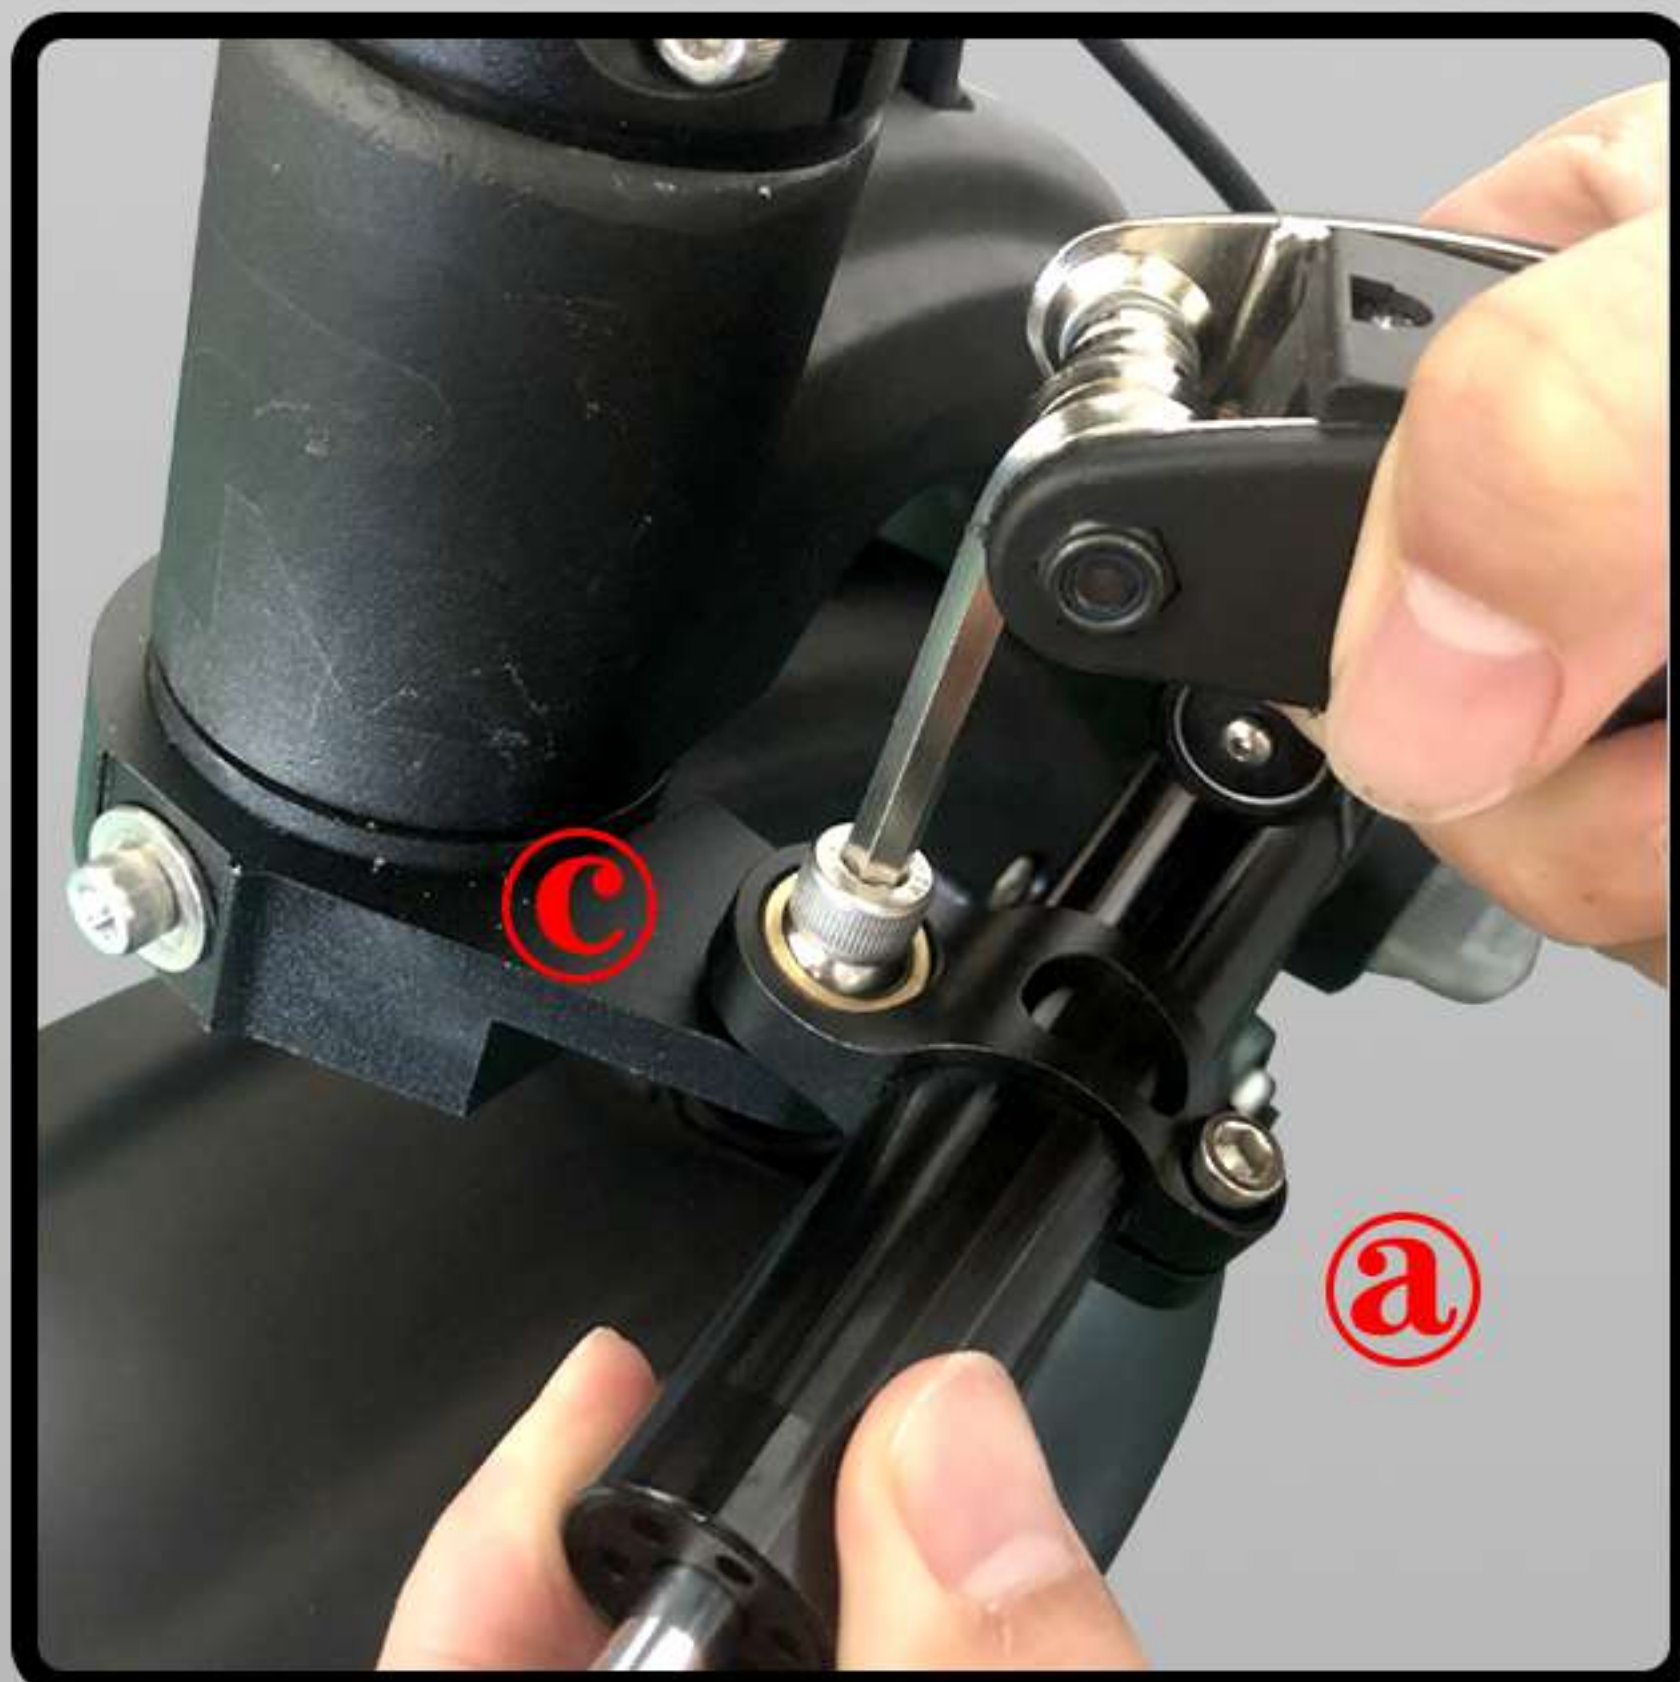

③ Tighten the fixing bolt "c". Aligning the damper with a suitable scale line, and then tighten the fixing bolt "a".



④ Installation complete.



SCOOTER UNFOLDING

HANDLEBAR UNFOLDING



① Push the handlebar in the direction of the arrow.



② Align the L-shaped buckle with the grooves, then tighten the folding knob.



③ Make sure to perfectly align the L-shaped buckle.



④ Unfolding complete.



SCOOTER FOLDING

HANDLEBAR FOLDING



① Loosen the knob in the direction of the arrow.



② Keep loosening the folding knob until the J-shaped buckle completely leaves the grooves



③ Lower the handlebar.



④ Folding complete.

🔧 CHARGING & RANGE

When charging, connect the charging cable in this order:

1. FIRST to scooter's charging port
2. THEN to the power outlet


NOTE: When connected to the charger, the red light indicates that the scooter is charging. The light will turn green when fully charged.

Be sure to close the charging port cap when driving or storing except when charging. Use only genuine chargers.

Range: 31-37 miles. The range of the scooter depends on many factors: road conditions (off-road, uphill), weather, rider's bodyweight, frequent braking and acceleration, single/dual drive, gears 1/2/3 etc.

POWER TURN ON/OFF


- 1 Insert the key into the power lock and turn to unlock your scooter.
- 2 Press the POWER key for 3 seconds to turn on.

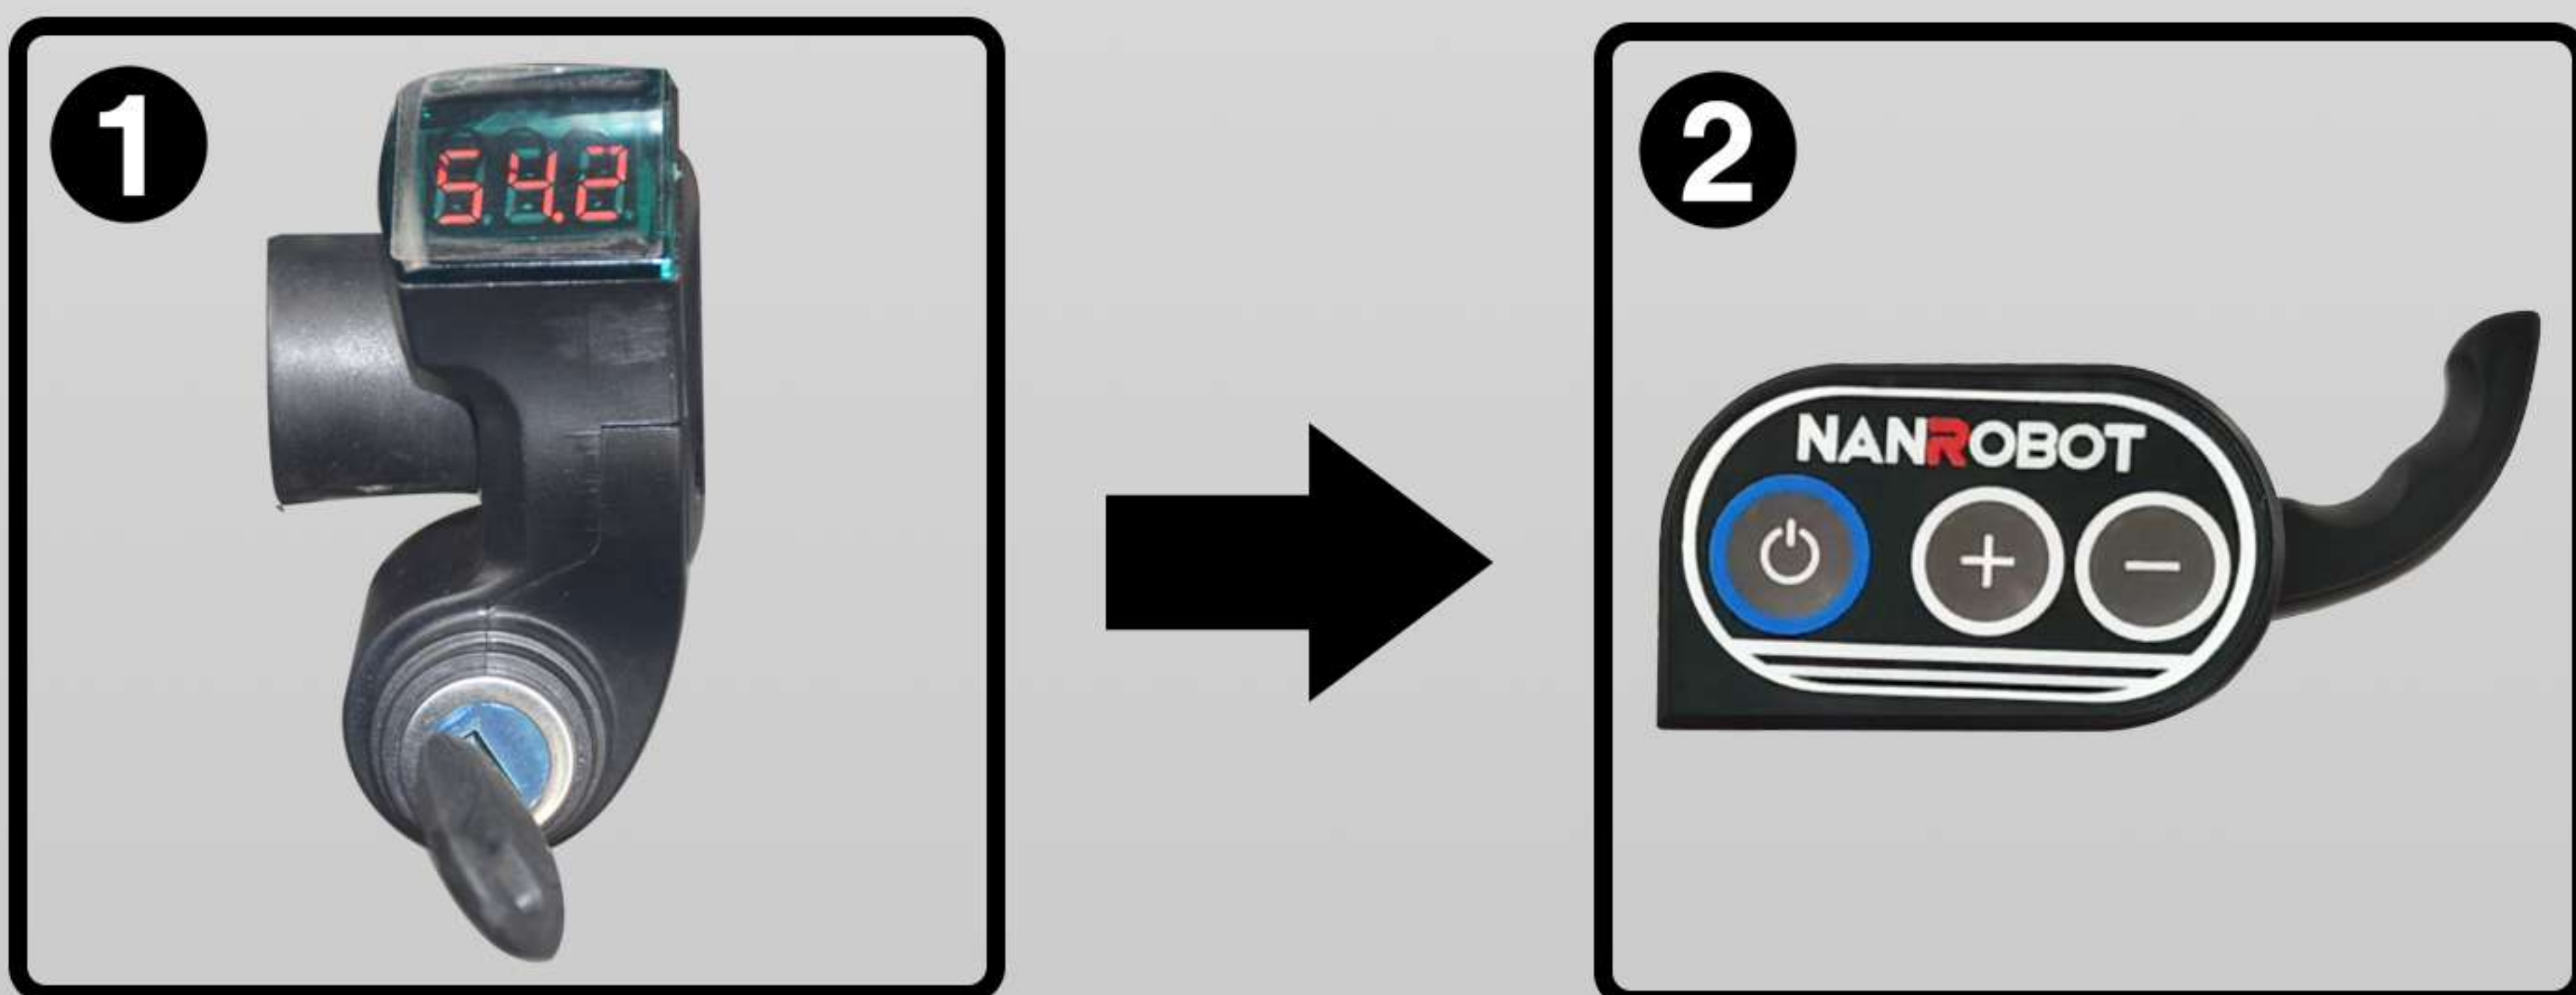

You can turn off power either directly via the power lock or turn it off by pressing and holding the POWER key on the control panel for 3 sec.



HANDLEBAR CONTROLS

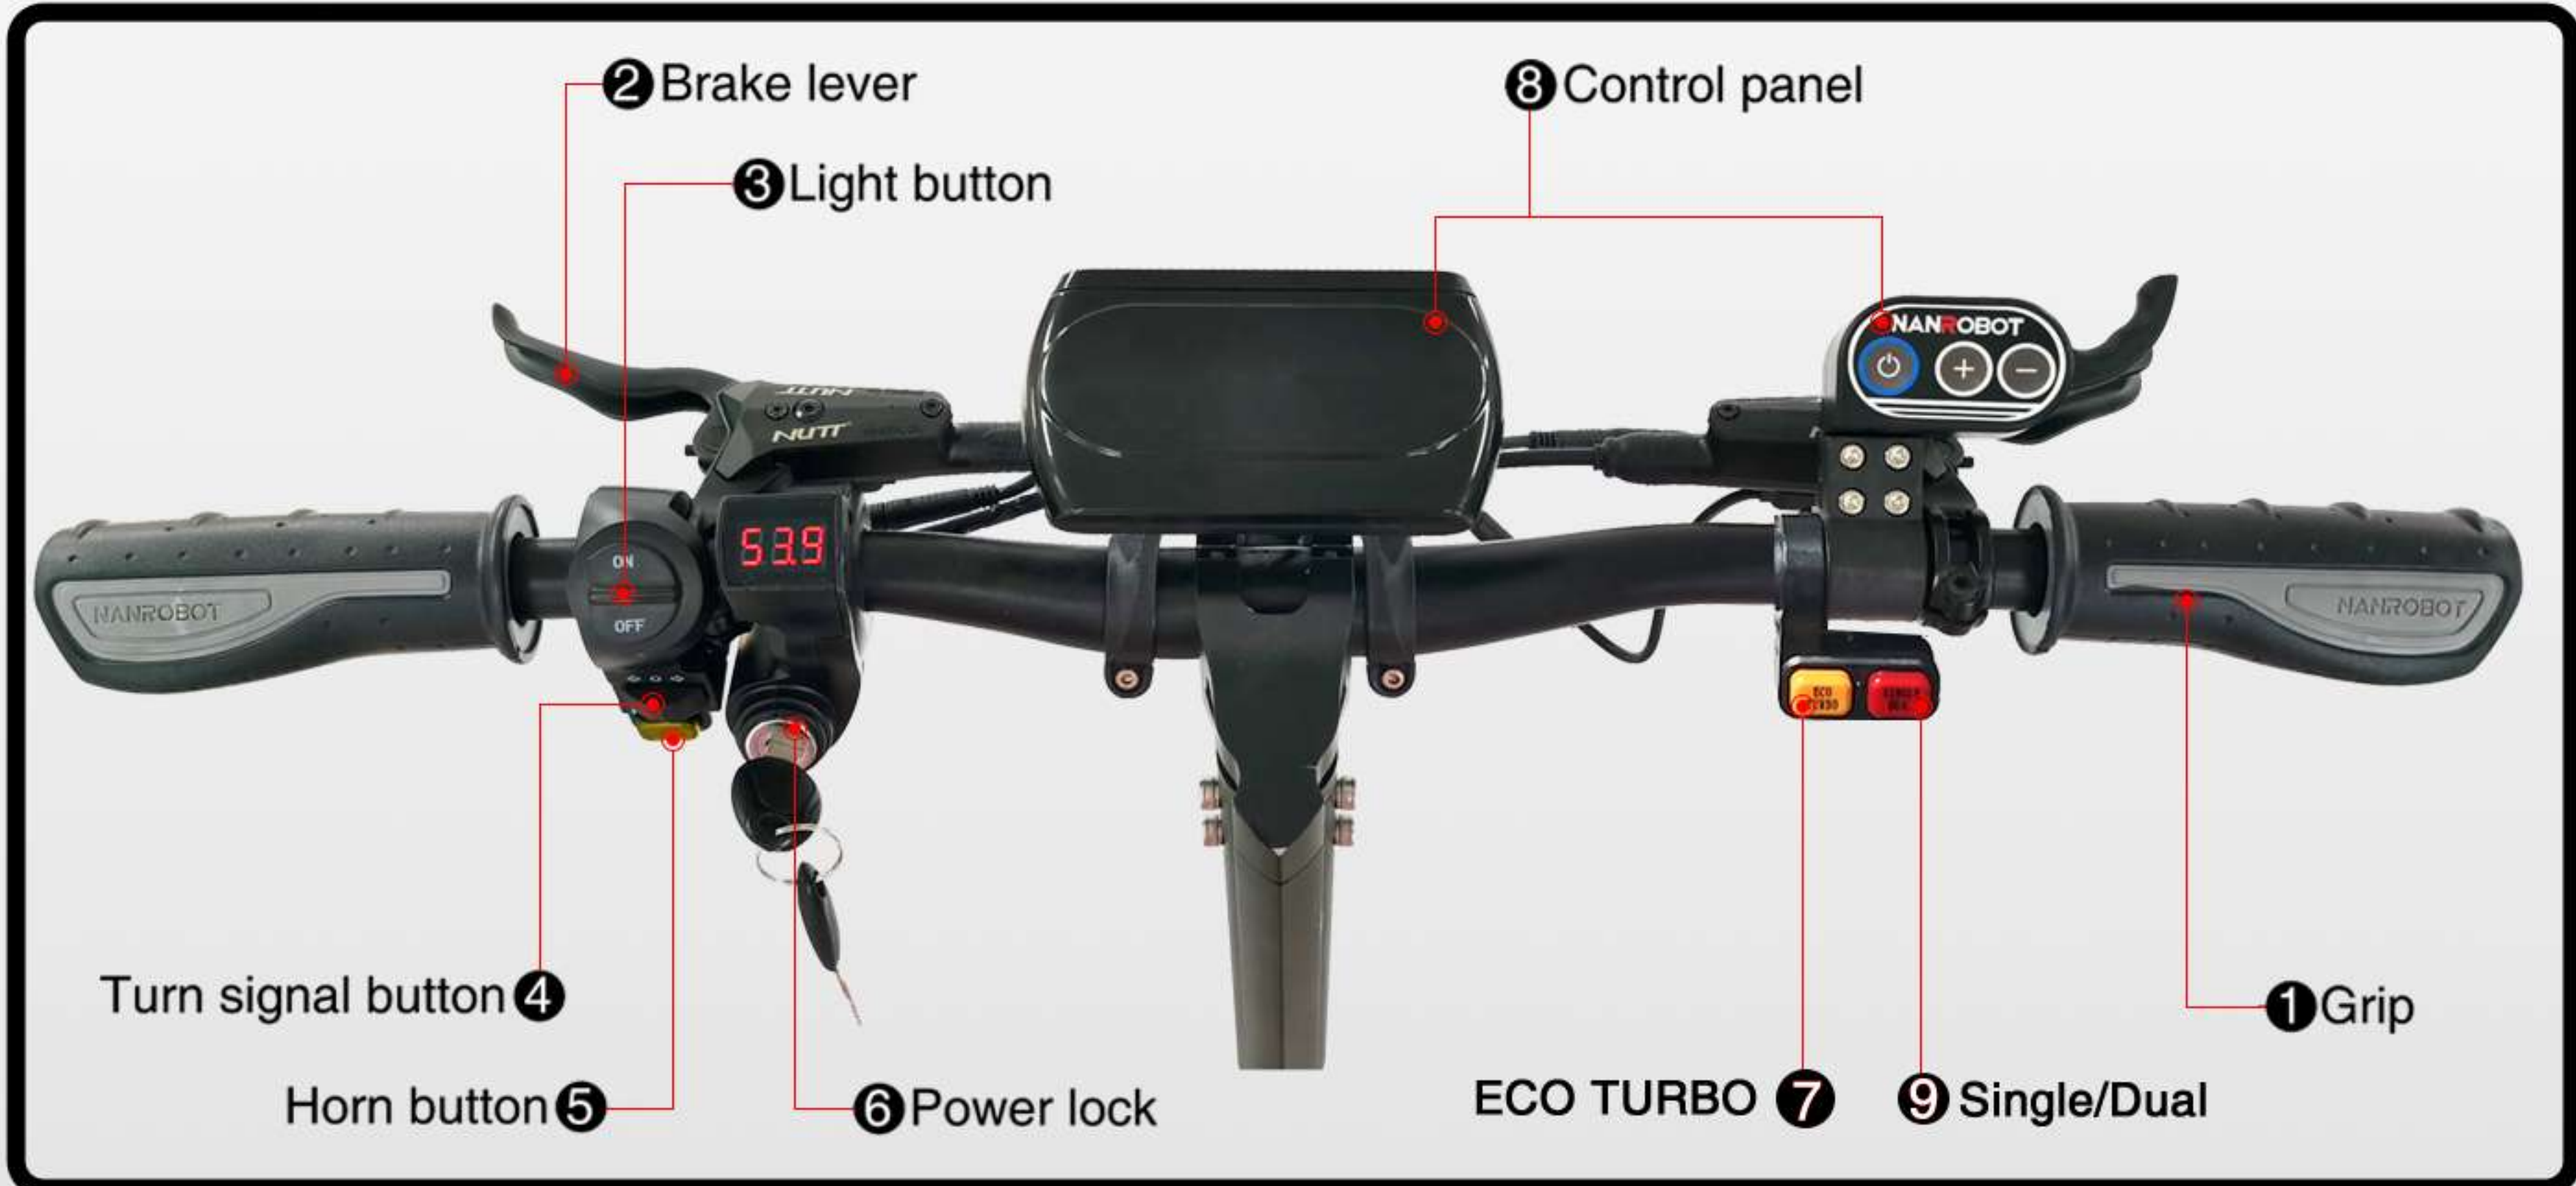

Lcd Control Panel



Horn Button



Light Button



Turn Signal Button



ECO Turbo Single/Dual




Power Lock



CONTROL PANEL INSTRUCTIONS

CONTROL PANEL

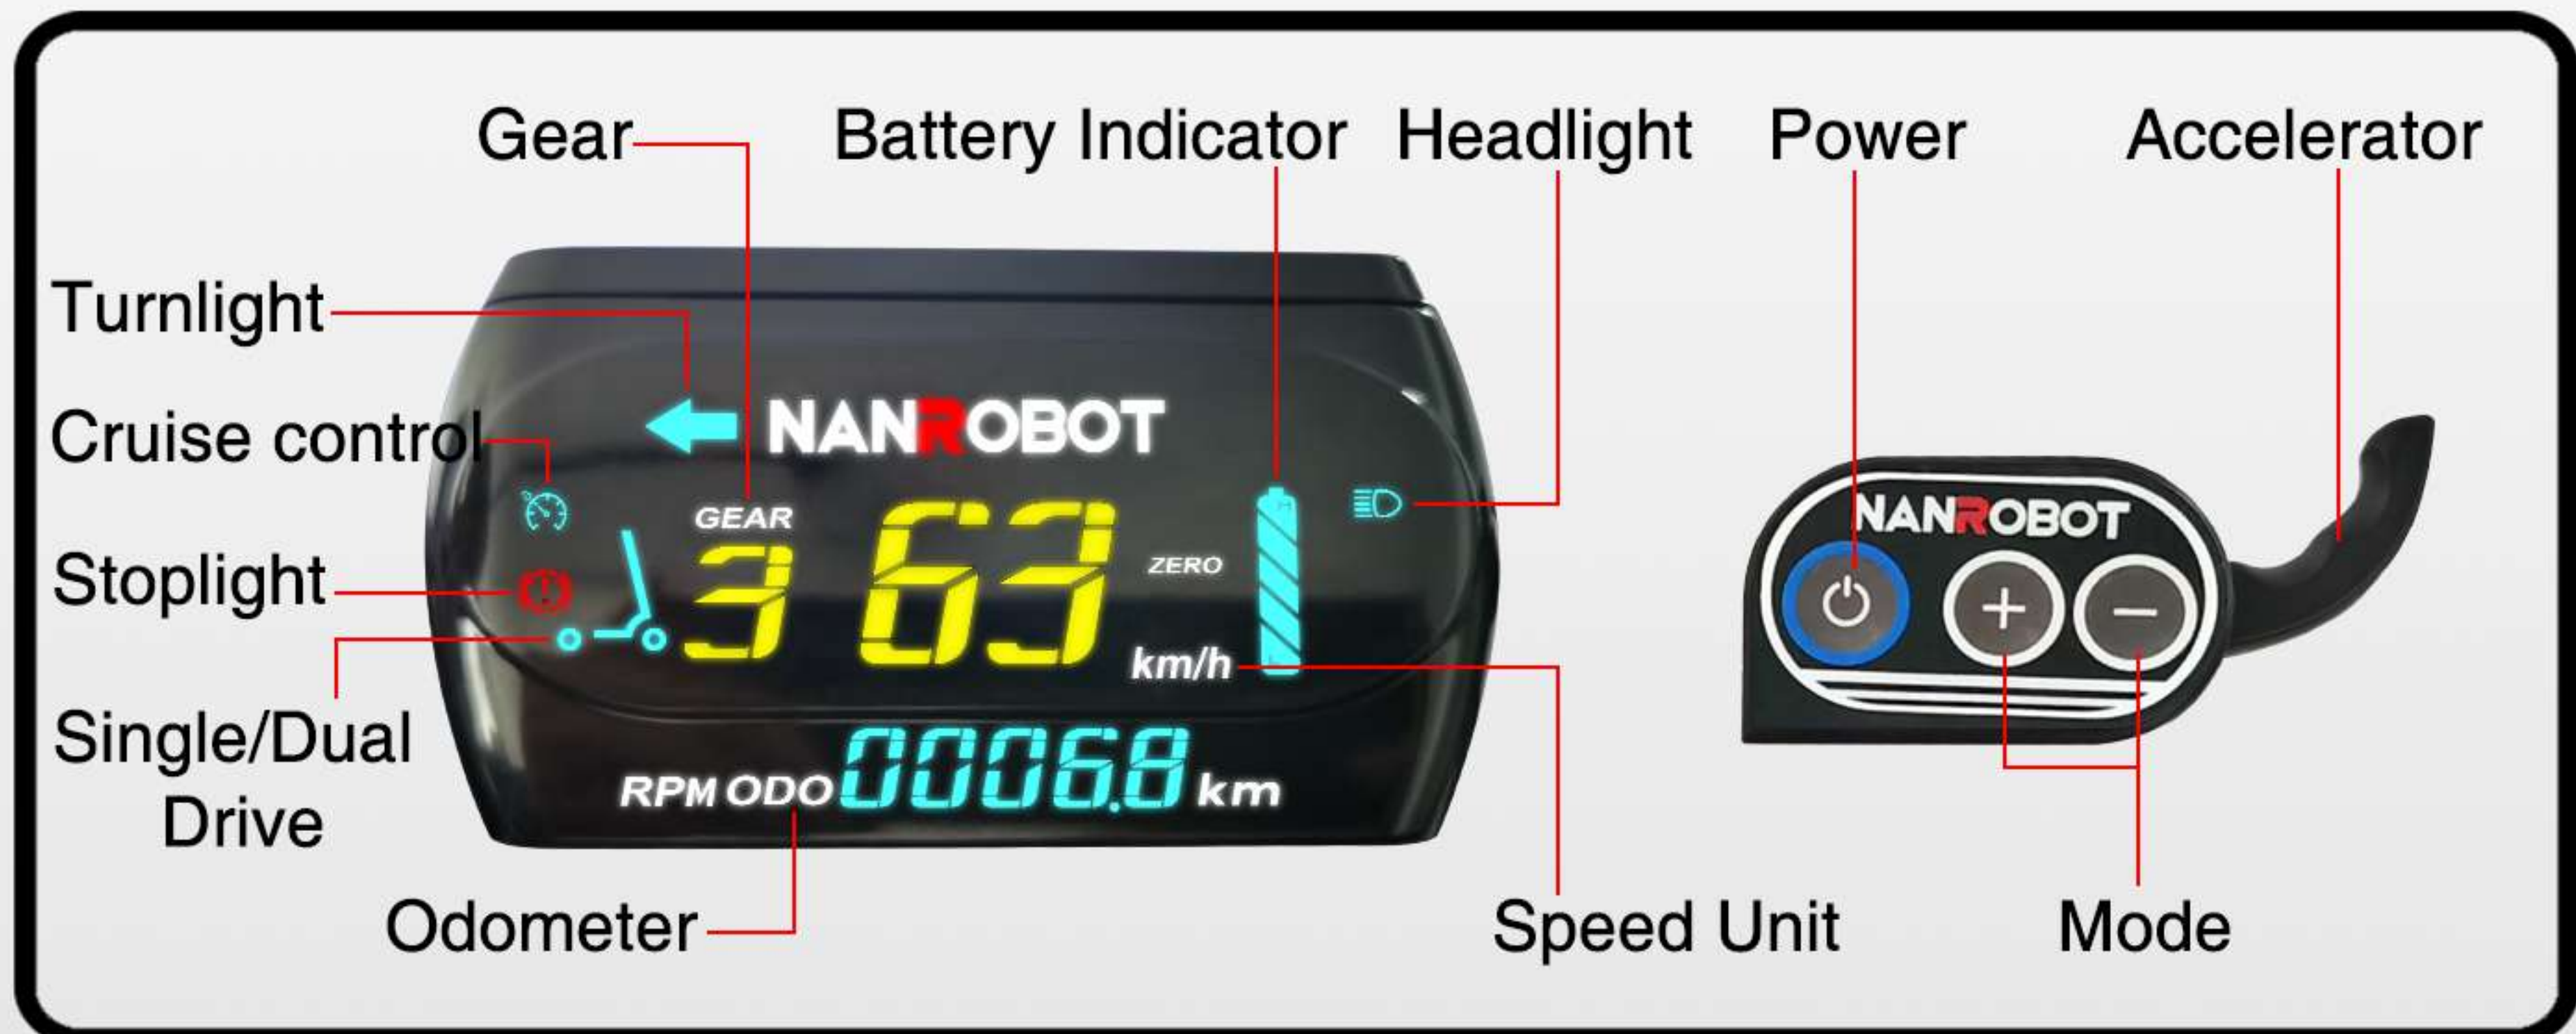

- POWER: long presses will either start or shut down the scooter)
- MODE: parameter setting key
- Gear: current gear (gears: 1, 2, 3)
- Switch Gears: Pressing the key (⊕ ⊖) allows you to change gears, shifting from level 1 (slowest) to level 3 (fastest).
- Short press the key (⏻) to switch between: TIME、TRIP、ODO、VOL.
- N-soft: A hard start requires greater momentum to start the scooter into motion.
- Speed Unit: mile/h, km/h.
- Battery Indicator: current battery capacity.

1. The panel will automatically turn off after three minutes of inactivity.
2. A short press of the POWER key(⏻) allows the user to change the display content of the instrument (TIME、TRIP、ODO、VOL、etc). When 00:00 is displayed, the panel is indicating current run time (TIME display) . When TRIP is displayed , it indicates the mileage for that particular trip . When ODO is displayed ,the total mileage of all trips is shown. the VOL display indicates the battery voltage.

 **PARAMETER SETTINGS**

Press and hold both MODE (+) and MODE(-) keys at the same time to enter the mode settings menu. Short pressing either MODE (+) or MODE (-) will change parameter items. Once at the desired parameter, holding MODE will change the value to flashing and all for that parameter to be modified. A short press to the MODE(-) key will decrease the value, and a short press on MODE(+) increases the value. After the modification is completed, hold the MODE key down to set and save the value, the flashing will also stop.

Note: Please keep the default values of the parameter settings; please do not change these values.

FOR EXAMPLE



How to disable EBS (Electric Braking System)

Press and hold both the MODE (+) and MODE(-) key simultaneously to enter the settings, and short press MODE (+) or (-) until P9 is displayed. Then hold MODE to select P9, short press MODE (+) or (-) to change it to 0. Then long press MODE to save the changes.

Parameter settings and definition		
P00	Wheel diameter:Unit:inch; Precision:0.1	Default=11
P01	Voltage cut off. When the voltage drops to 43.0V, undervoltage protection will be started and the power supply will be cut off automatically.	Default=43.0
P02	Magnetic poles in hub motor. Do not change it .	Default=30
P03	Speed sensor function. Do not change it.	Default=1
P04	Speed units: 0=km/h 1=mile/h	Default=0



PARAMETER SETTINGS

P05	Non-kick start / Kick start 0=Non-kick start 1=Kick Start	Default=0
P06	Turn on / off cruise control 0=Non-cruising 1=Cruising	Default=0
P07	Start: 0=Slow start 1=Power start	Default=1
P08	Max output (max speed) 1-100%	Default=100
P09	EBS brake settings: 0 = EBS off 1 =weak EBS 2 = strongest EBS	Default=0
P10	—	Reserved function

COMMON ISSUES AND SOLUTIONS


Issue 1: Both the light and horn are not working. This happens when the display is defective and is solved by replacing the display.

Issue 2: The scooter is not charging. The issue may be with the charging port. If the charging port is burned out, it will require replacing. The other may be that the charger is damaged. In either case, please contact customer service via e-mail to receive a solution.

Issue 3: The brake pads produce abnormal sounds. Generally, this is due to malposition. Please use the tool kit and adjust to the correct place.



REMOTE CONTROL FOR LIGHT

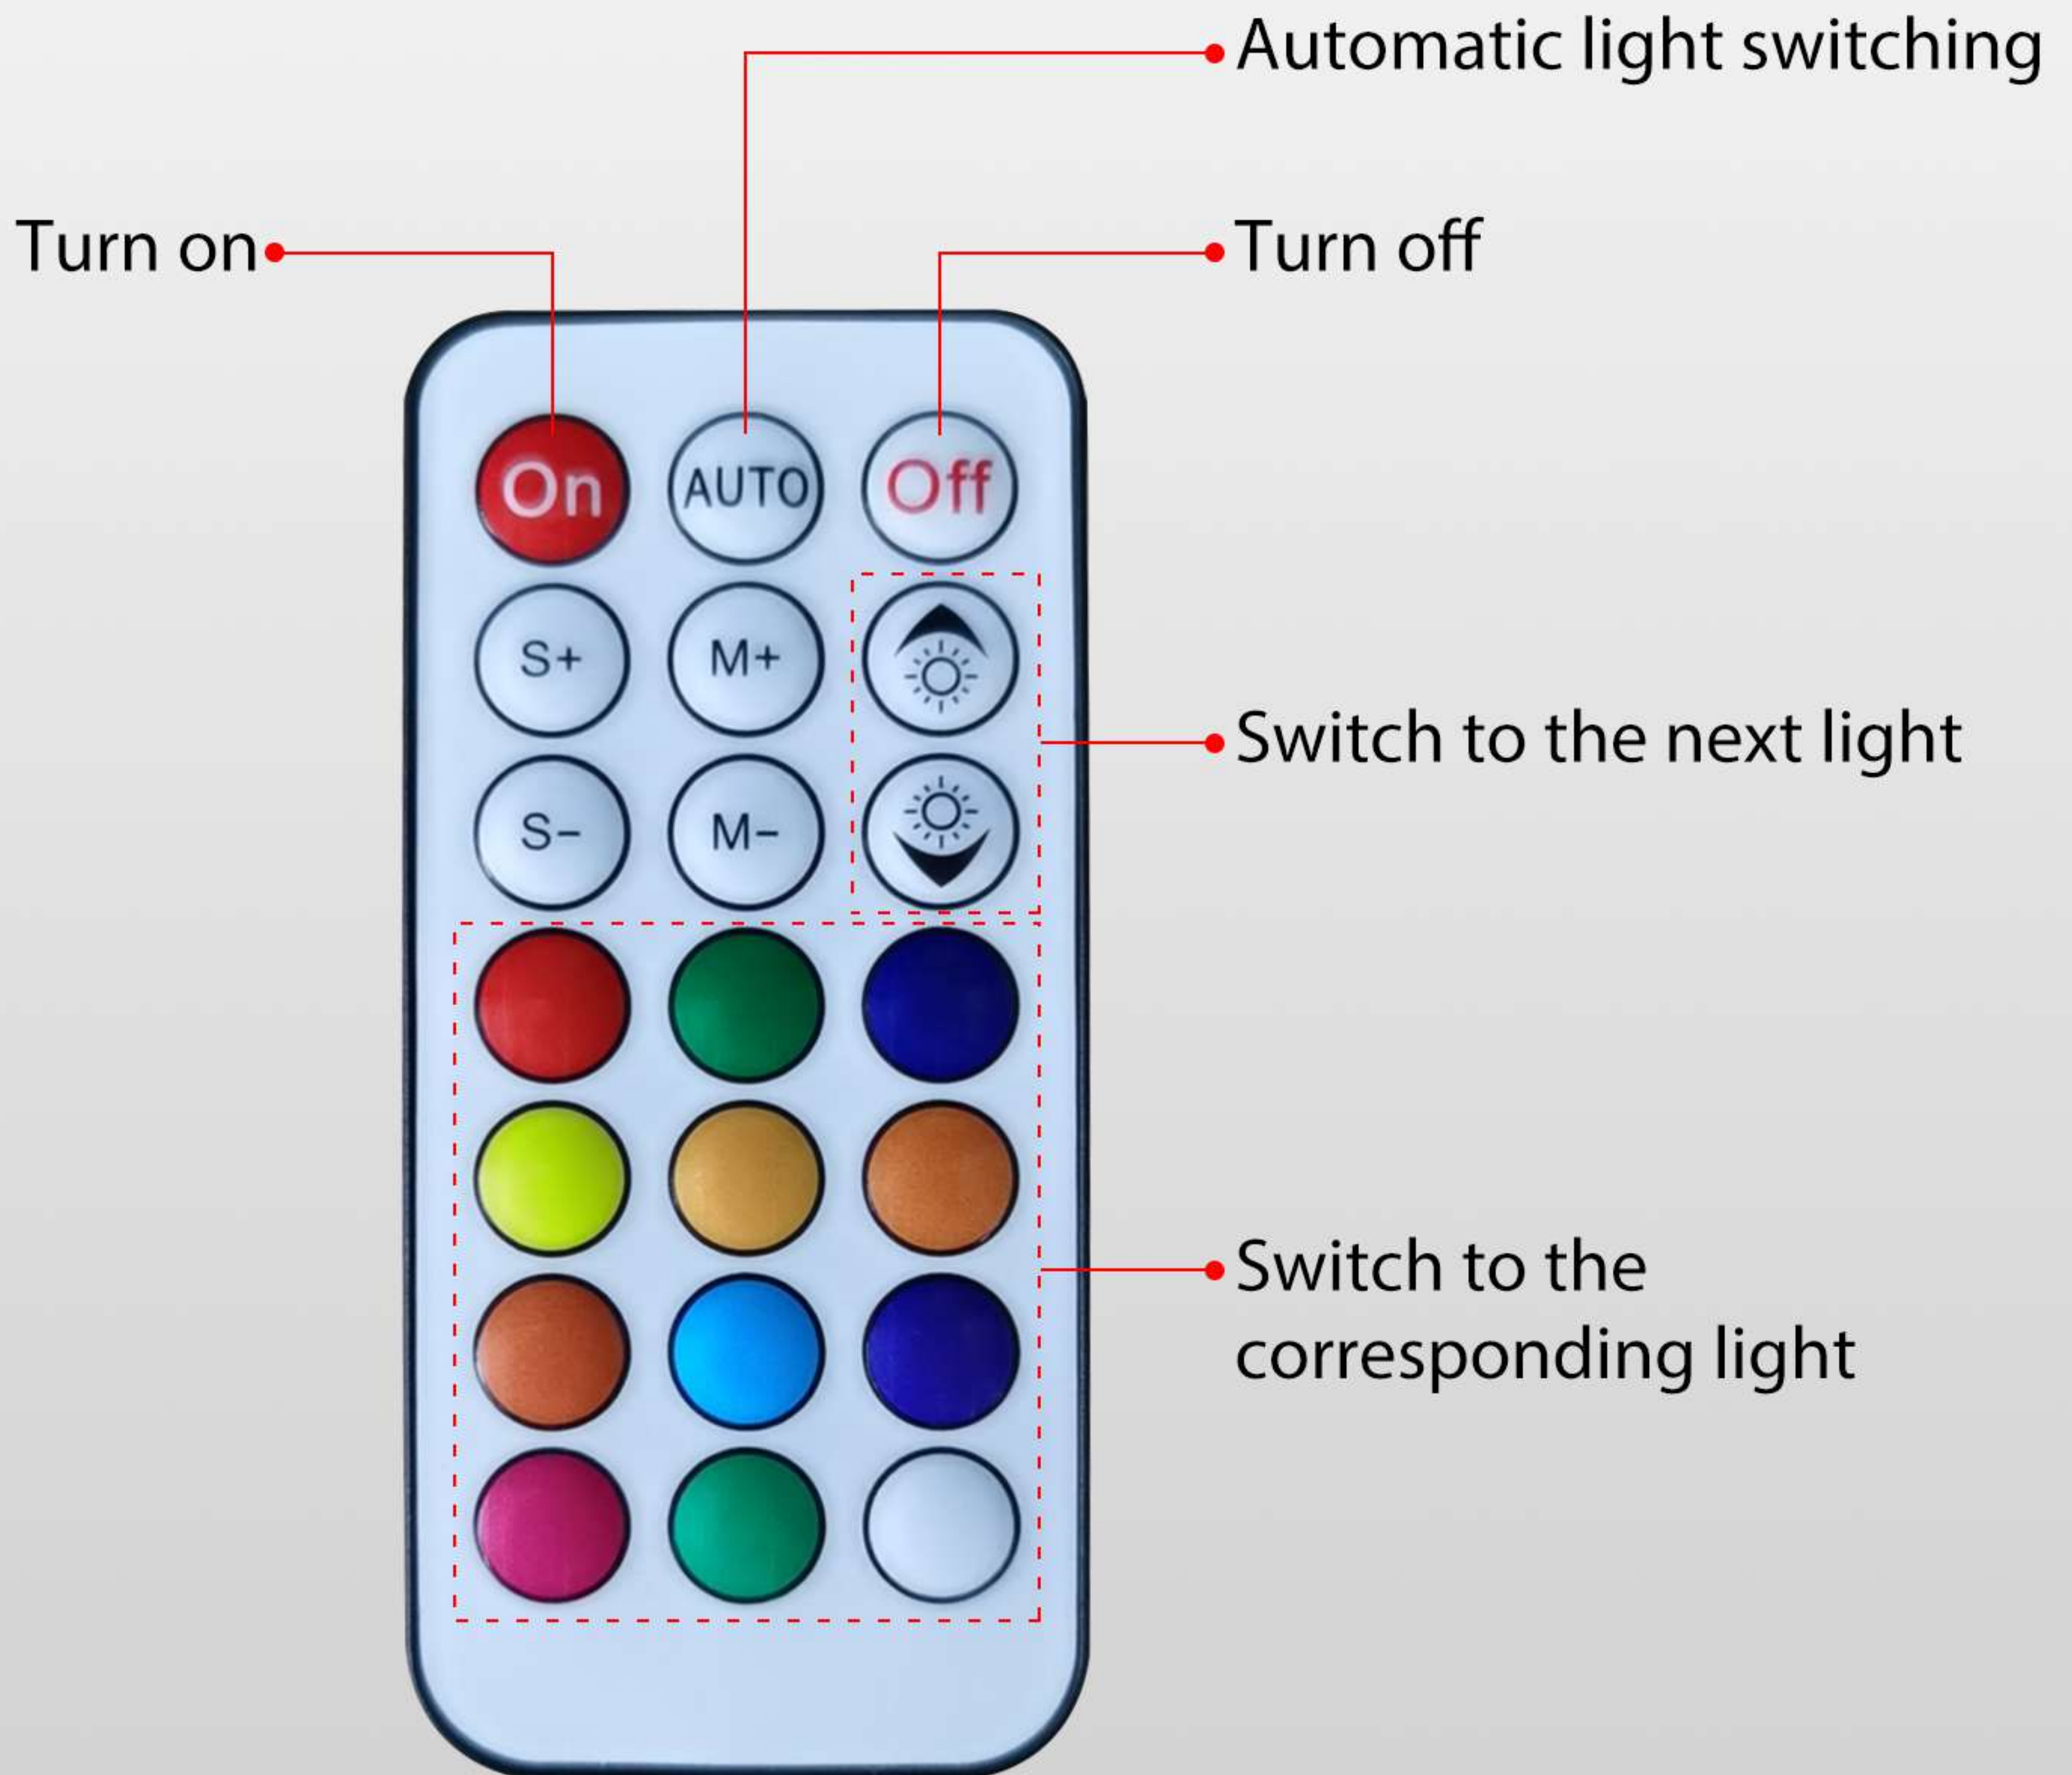



MAINTENANCE & FAQ

The screws should be regularly maintained, inspected and tightened. Especially the screws on the folding mechanism, brake system and motors (axle nuts).

1. Tighten the folding mechanism screws, handlebar, front & rear shock absorbers, front & rear wheel axle nuts.

2. Brakes: if you find rust or excessive wear on the brakes, which will occur with regular use over time, the brake pads and brake discs should be replaced.

3. Motor: Check the motor wires regularly. All exposed wires should be wrapped with electrical tape.

4. Tires:

(1) Do not inflate the tires beyond the recommended air pressure range.

(2) The tires will slide easily in wet conditions. Avoid rain, snow, icy road, wet dirt road, water, poor visibility.

(3) Replace the tires on your scooter once wear patterns become evident. This will prolong the use of the scooter.

5. Speed limit removal: please go to P8 and then press the "M" button for 1 minute until you go back to the main menu.

6. Battery & overheat protection: the controllers and the battery has temperature sensors and the scooter stops working when it gets too hot. Please wait about 0.5-2 hours to cool down the scooter or use eco/1st gear to continue riding after 5-10 minutes.



CUSTOMER SUPPORT

Scooters manufactured by Nanrobot are pre-assembled, though some of the parts may require assembly by our customers. To help ensure the safety of your scooter and driving, please check and test everything before using your scooter. If your inspection finds an issue with the scooter, please contact your seller. You can also contact your seller if you need assistance with any of the assembly

SHIPPING

To avoid damage during transport, we have safely packed all of the electric scooter components in foam and cardboard. If there is something broken upon arrival, please take photos of the damaged parts and contact the seller, they will be able to offer you a solution.

MECHANICAL DAMAGE OR MODIFICATIONS

If your scooter is damaged due to an accident or misuse, you can buy replacement parts nanrobot.com, the distributor or seller you made your purchase from, or you can send the scooter to be repaired. The buyer bears all repair costs. If there are other after-sale problems or questions, please send an e-mail to us at support@nanrobot.com.

**WARRANTY GUARANTEE**** WARRANTY GUARANTEE**

We do provide a warranty and offer customer service for our products if you find there is a quality issue. You can do this by contacting us, and we will offer professional instructions and solutions timely.

For the entire scooter, vulnerable parts like tires, brake discs, horn, dash board, light etc. are within the warranty of 90 days Battery and controllers are within the range of 180 days. The frame is within 365 days repair warranty. If the problem is caused by non-human factors, we will provide new replacements for free.

We are not responsible for wrong return and refund loss, the buyer should be responsible for more than 20% return charge, and double-way transportation charge.

EXCHANGES (IF APPLICABLE)

We only replace items if they are defective or damaged. We do not accept returns but do offer exchanges; all inquiries can be directed to us via an e-mail at support@nanrobot.com.

NANROBOT

