


CHANGING APN SETTINGS

Firstly you will need to connect to your 4G 360 Cameras WiFi hotspot

You will need to go into your phones settings and find available WiFi networks.



WiFi name: MIFI_XXXX

Password: 1234567890

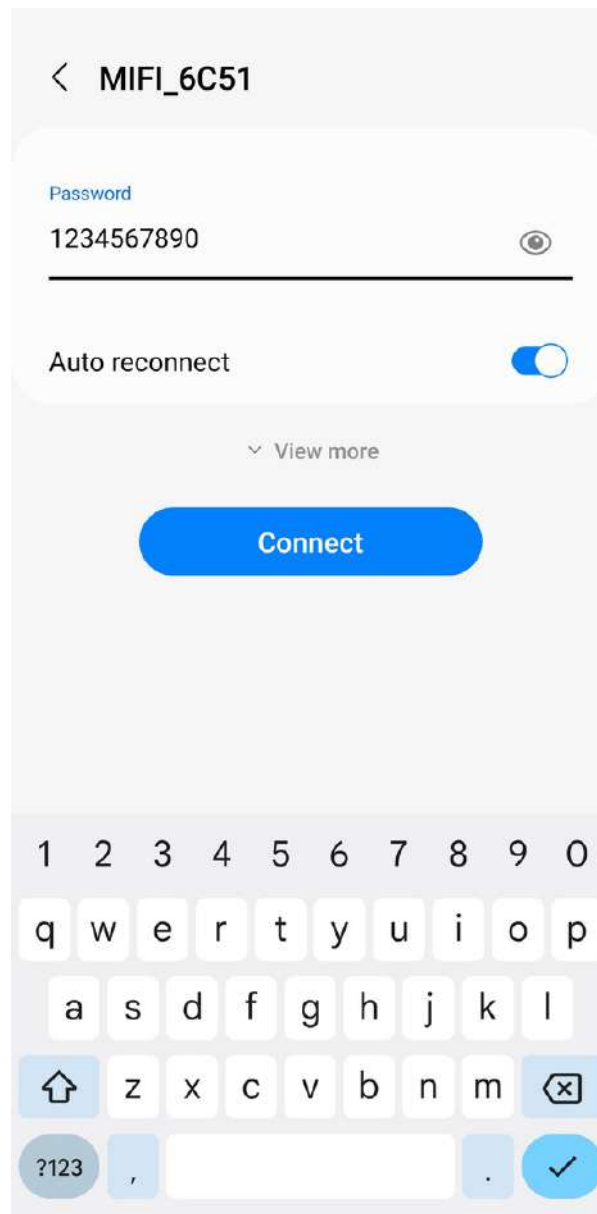

CHANGING APN SETTINGS

Once connect, you will need to open your phones web browser and follow the instructions below.

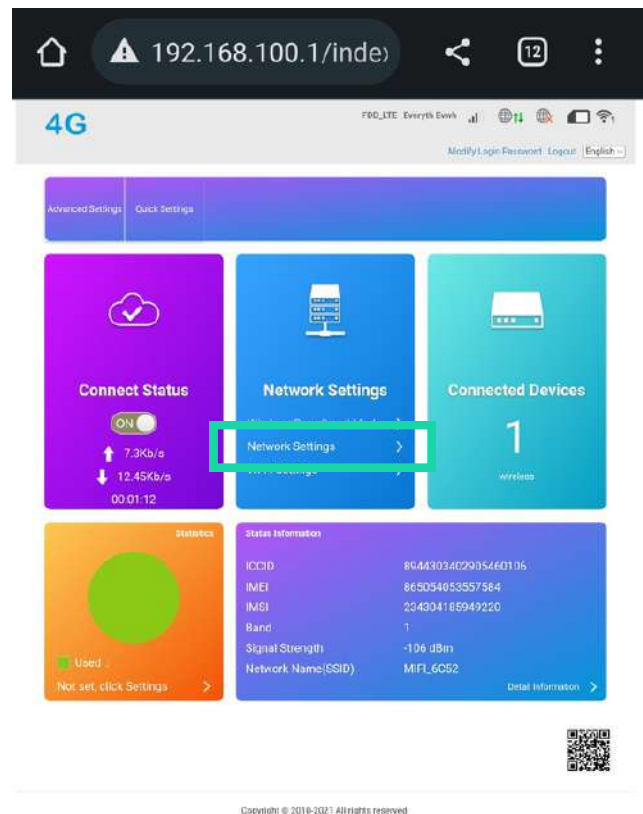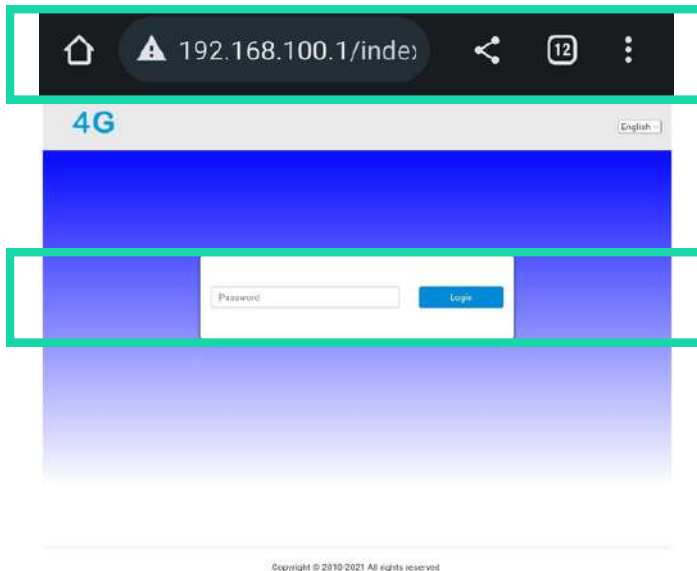

Type in 192.168.100.1 into the address bar and click on your keyboards enter button.

You'll now be prompted with a login page.


The password is: admin

Select 'Network Settings'.

Screenshot this page and send it to us if you're having connectivity issues.


Ensure connection status is set to on.

CHANGING APN SETTINGS

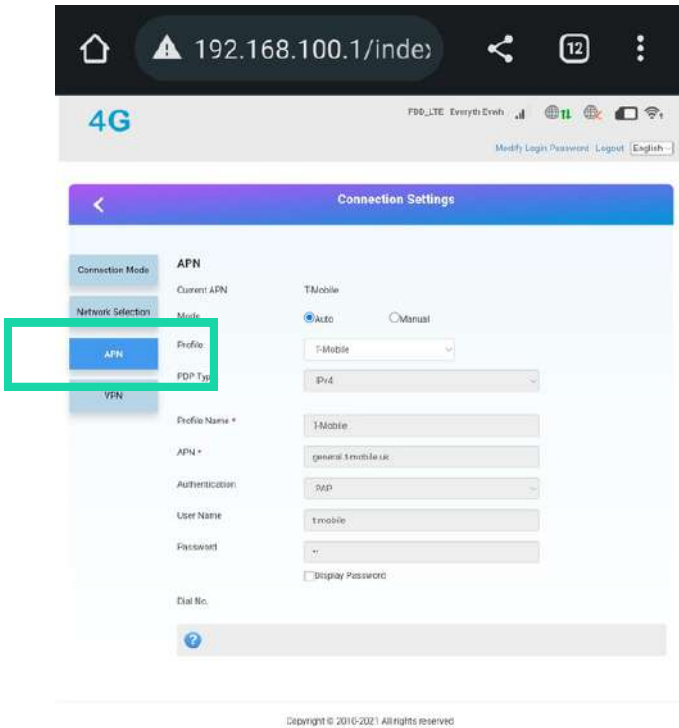

Copyright © 2010-2021 All rights reserved

Click on the APN menu on the left hand side.

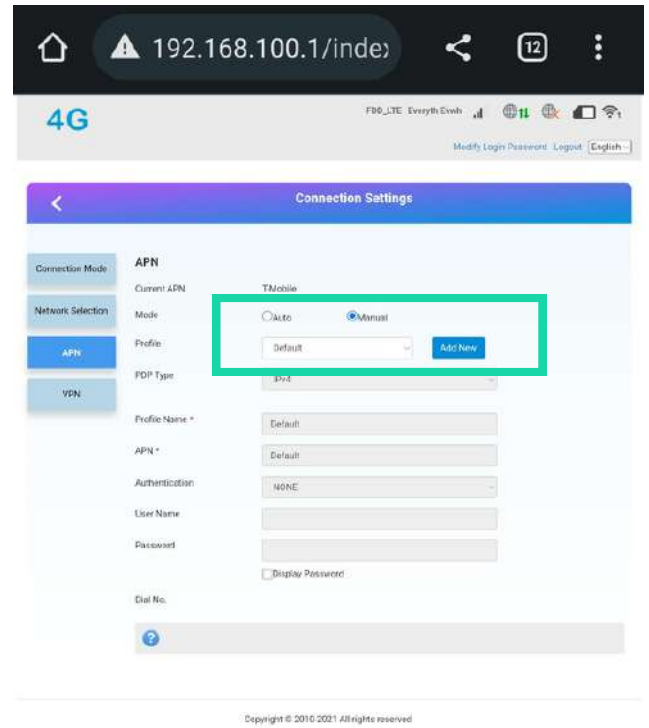

Copyright © 2010-2021 All rights reserved

Click the the 'Manual' radio button then click 'Add New'.

CHANGING APN SETTINGS

The screenshot shows a mobile device's interface. At the top, there is a status bar with a home icon, a warning icon, the IP address 192.168.100.1/index, a plus sign, a notification icon with the number 6, and a menu icon. Below the status bar, the network status is 4G, and the carrier is FDD_LTE Everywhere Evwh. There are icons for signal strength, airplane mode, and Wi-Fi. At the bottom of the status bar, there are links for 'Modify Login Password', 'Logout', and 'English'.

The main content area is titled 'Connection Settings' and has a back arrow on the left. On the left side, there is a sidebar with four buttons: 'Connection Mode', 'Network Selection', 'APN', and 'VPN'. The 'APN' button is highlighted in blue.

The 'APN' settings are as follows:

Current APN	EE
Mode	<input type="radio"/> Auto <input checked="" type="radio"/> Manual
Profile	EE <input type="button" value="Add New"/>
PDP Type	IPv4
Profile Name *	EE
APN *	everywhere
Authentication	PAP
User Name	eeseecure
Password <input type="checkbox"/> Display Password
Dial No.	*99#


An 'Apply' button is highlighted with a red box at the bottom right of the settings area. There is also a help icon (question mark) at the bottom left.

Copyright © 2010-2021 All rights reserved

In this example we are using an EE SIM card therefore are entering EE's APN settings. You can do a quick Google search to find your providers settings. Once entered, double check details are correct and click 'Apply'

CHANGING APN SETTINGS


Select 'Yes' on the pop-up that appears.

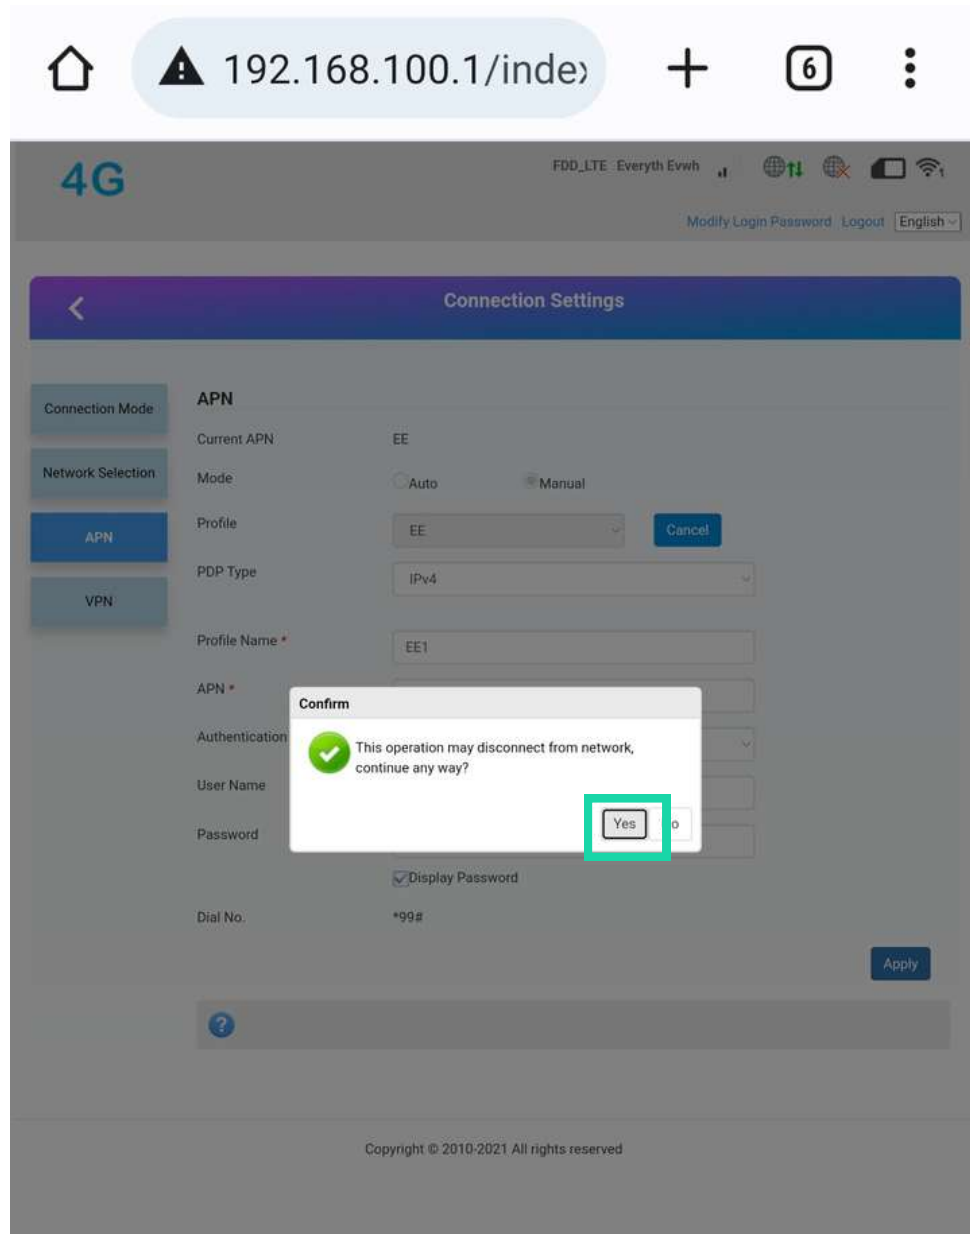

At this point, your phone will disconnect from your 4G cameras WiFi hotspot. You may need to reconnect to the WiFi in your phones settings.

CHANGING APN SETTINGS

When you have reconnected to your cameras WiFi hotspot, log back into the admin webpage and ensure the connection status is 'On'. You can turn it on by clicking on the slider.

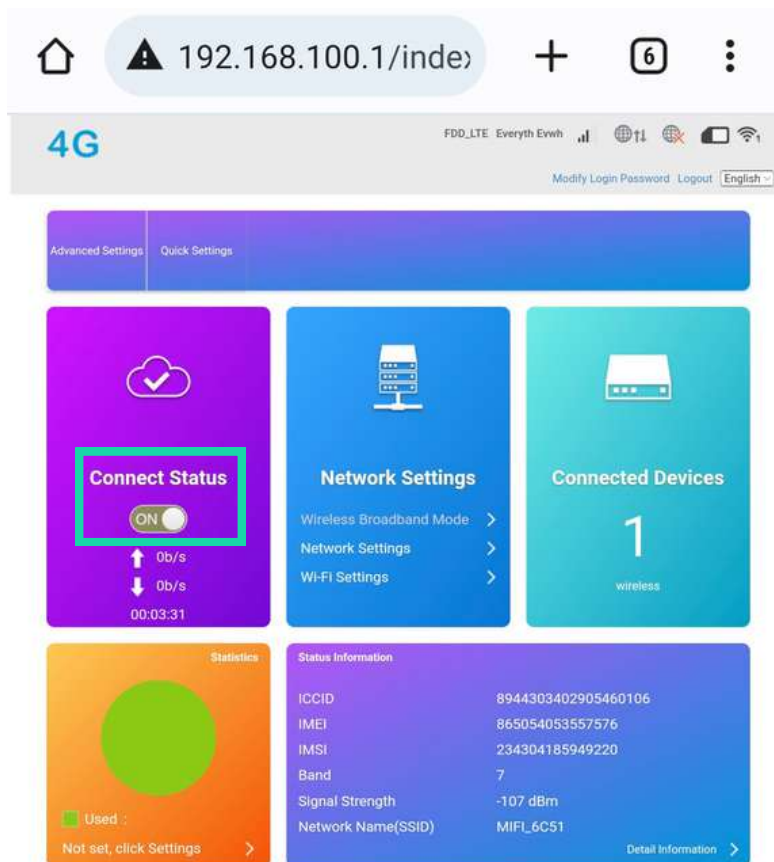

To test your camera is now successfully connected, while connected to your 4G cameras WiFi hotspot navigate to www.fast.com in your web browser and run an internet speed test. Please note, you'll require at least 2Mbps for a smooth experience.

Ensure you disconnect from your cameras WiFi hotspot when testing the camera is connected in the CamhiPro app.

Still having trouble?
Send us a screenshot of the screen above.