



Markar HG305 Adjustable Hinge Guard

Standard Features

Barrel Type Hinge
 .187" diameter Stainless Steel pin (rod)
 Medical bearings
 Stainless Steel end pins
 Material
 Heavy-duty 14 gauge Stainless Steel
 Finishes
 US32D Satin Stainless Steel (630)
 Standards
 ANSI/BHMA Standard A156.26 Grade 1
 Mounting Hardware
 Fasteners concealed when door is closed
 Custom 12-24 x ¹¹/₁₆" S.S Phillips Flat Head Undercut TEK Screws

Capacity
 Supports weights up to 600 lbs.
 4'0" maximum door width
 Standard Sizes
 6'8", 7'0", 7'2", 8'0", 10'0"
 Hole Pattern
 Symmetrically templated
 Handing
 Not required for standard 7'0", 8'0" or 10'0". Handing required for 6'8" and 7'2" and for most optional features listed


Fire Rating
 3 hours- hollow metal doors
 90 minutes- hollow metal and composite
 20 minutes- wood doors
 Classified in accordance with UL10C for positive pressure
 Fire-rated label
 Windstorm
 Products is constructed in accordance with Guidelines FEMA 320 & FEMA 361.

Optional Features


Finish
 US32 Bright Stainless Steel (629)
 Scratch-Resistant Powder Coated Paint
 Fasteners
 Adjust-A-Screw™ for correcting frame fit problems up to ³/₈"

Other Features
 Custom lengths- specify in inches
 Custom hole pattern
 Dutch door hinges- suffix "DDP"
 Hospital tips – suffix "HT"
 Raised barrel – suffix "RB"
 Welded end pins
 Security studs

Electrical Modifications
 Adjustable Monitoring Switch - suffix "AMS"
 Current Transfer Prep - suffix "CTP"
 Electrical Transfer Access Prep - suffix "ETAP"
 ElectroLynx®
 EL4 (4 wire), EL8 (8 wire), EL12 (12 wire)
 PoE (9 wire)



The integral hinge guard protects the door from dings and gouges from carts and gurneys while providing clean lines and aesthetic appearance. Our HG products also have fire ratings up to and including 3 hours. Not only that, but the wrap-around edge guard protects the door from unsightly dents and gouges and will deflect objects, preventing further damage.

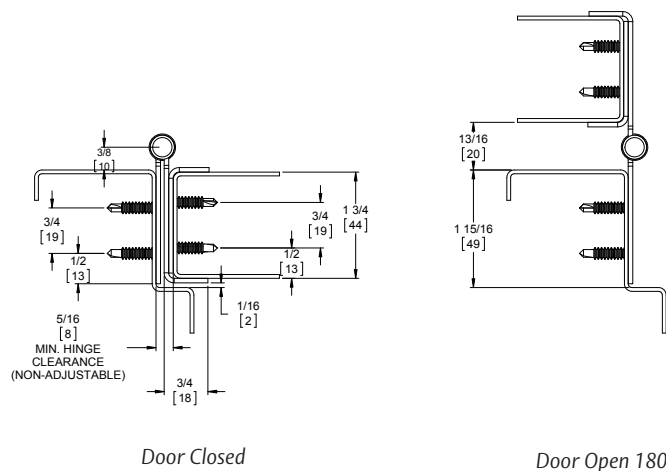

ASSA ABLOY

The global leader in door opening solutions

800-824-3018 | www.markar.com
 Check the web site for the up-to-date catalog

Copyright © 2015-2017, Pemko Manufacturing Co., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Pemko Manufacturing Co. is prohibited.