

## BREMA G1000A

### MODULAR ICE FLAKE MACHINE

Brema's G range of modular ice flaker heads produces granular ice flakes which automatically drop into a separate Brema storage bin.

The Brema G1000A is a modular ice flaking machine that produces 1000kg of granular ice per 24 hours and is designed to fit on top of a range of Brema storage bins with differing capacities from 500kg to 550kg. The G1000A can also be installed directly on top of cool rooms.

Granular ice is ideal for exhibiting and presenting foods as well as for use in medical industries. The ice has a fast and efficient refrigerating effect and is easy to handle and dose.



### STANDARD FEATURES

- 1000kg production per 24 hours
- Can be installed on top of storage bins with capacities between 500kg and 550kg
- Can be installed directly on top of cool rooms
- Produces compact, granular flakes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Electromechanical operation
- Powerful gear motor and auger system

Ice Flakes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*from the world of Comcater!*

**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695


**Melbourne**  
96-100 Tope Street  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 3 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

**Perth**  
Unit 4/35 Westchester Road  
Malaga WA 6090  
Tel: +61 8 9248 9290  
Fax: +61 8 9248 1903

# BREMA G1000A

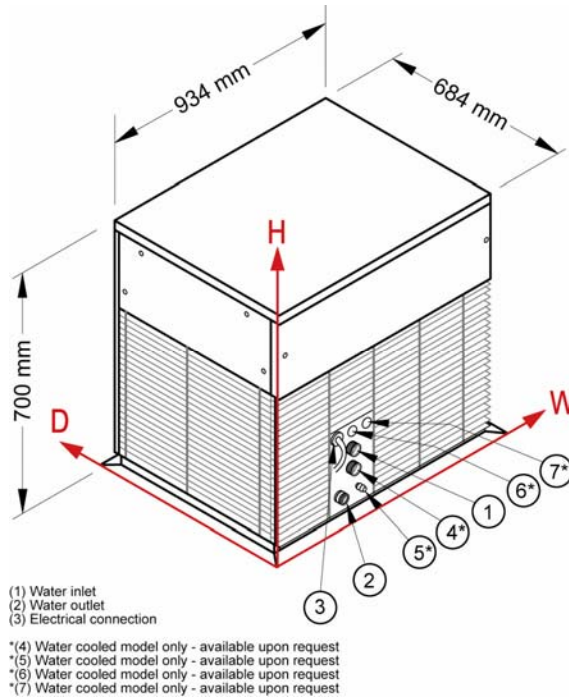

## DIMENSIONS

934W x 684D x 700H mm

## CONNECTIONS

3/4" Water inlet, 24mm Water outlet  
 & Electrical connection

## USABLE BINS

BIN550 V DS, DRB500

## TECHNICAL DATA

Production 24h	1000 kg
Cooling System	Air
Ice Tyoe	Granular
Refrigerant	R404A
Electrical Consumption	3200W
Power Requirements	415V 15amp 3P
Weight	172 kg

## STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve

## CONNECTIONS

	W	H
Water inlet	372 mm	187 mm
Water outlet	337 mm	60 mm
Electrical connection	358 mm	257 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY:



wagga  
 catering  
 equipment.

e info@waggacatering.com.au p 02 6925 1115