## CBP100 | BATH Ventilation



#### Ventilation Fan

Quickly remove odours and humidity with our very quiet, Energy STAR certified high-performance bath fan. Equipped with a high-density polyethylene (hard rigid plastic) fan for quiet operation and long-lasting durability, our ceiling-mounted fan meet all cETLus safety standards.

Customize with the following SMART Options:

- Humidity Sensor to automatically regulate moisture and protect your home and family from mold
- LED Light Panel for extra illumination without having to take up further ceiling space

### **Features**

- · 100 CFM
- · 0.8 sones
- · Thermal fuse protection
- · Energy Star approved
- · Includes 4" duct connector
- Recommended for bathrooms up to 95 sqft (8' ceiling)

## Housing

Wiring from inside or outside housing with 8" leads
26 gauge galvanized steel housing (corrosion resistant)

#### Motor

- Includes a built in overload disconnect for safety and longer motor life
- Includes a capacitor start motor that performs with high efficiency and long lasting reliability
- Plug-in permanently lubricated motor, engineered for continuous operation









## Installation


- Fit any joist from Min: 12" to Max: 24" width spans
- · Can be mounted with flange or hanger bars
- · 4" diameter duct connectors supplied
- Heavy duty triple point mounting brackets that can be adjusted up to 24 inch joist centers without vibration
- Premium grille is made of rugged polymeric resin for durability & comes with torsion spring clips for even mounting



Cyclone Range Hoods Inc.


# CBP100 | BATH Ventilation




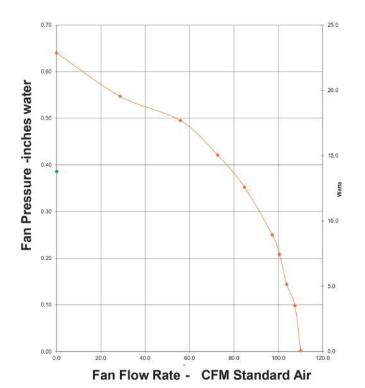

| SPECIFICATIONS               | CBP100      |  |
|------------------------------|-------------|--|
| Static Pressure              | 0.1         |  |
| Noise Level (Sones)          | 0.8         |  |
| Air Flow Volume (CFM)        | 100         |  |
| Current (Amps)               | 0.19        |  |
| Power Consumption (Watts)    | 23          |  |
| Electrical Connection (V/Hz) | 120/60      |  |
| Thermal Fuse Protection      | Yes         |  |
| Motor Type                   | AC          |  |
| Blower Wheel                 | Centrifugal |  |
| Duct Diameter                | 4"          |  |
| Humidity Sensor              | *           |  |
| LED Light Panel              | *           |  |

<sup>\*</sup>Available Smart Options

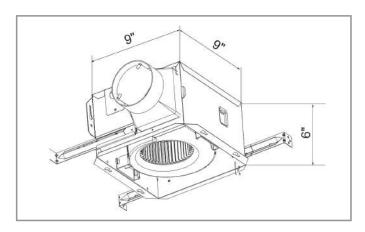

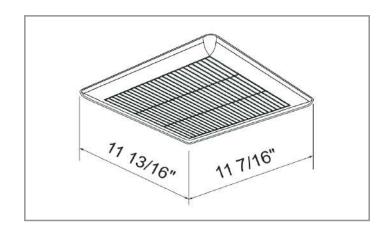

| Model       | Description                              | Packaging  | Contractor Pack | Master Pack |
|-------------|--|------------|-----------------|-------------|
| CBP100      | Bathroom Ventilation                     | Individual | -               | Pack of 6   |
| CBP100 MBG  | 100 CFM Motor/Blade/Grille               | -          | Pack of 8       | -           |
| PCB58 HSG   | Housing for Model CBP50/CBP80/CBP100     | -          | Pack of 8       | -           |
| CBP100H     | with Humidity Sensor                     | Individual | -               | -           |
| CBP100LED3  | with LED Light panel                     | Individual | -               | 1           |
| CBP100HLED3 | with Humidity Sensor and LED Light Panel | Individual | _               | _           |