


Product Details

Brush DC Motor 14204S006-SP

Note: Product photo is for illustrative purposes. Please refer to Engineering Drawing for specifics.



Motor Series	Series 14000 LO-COG Brush Commutated DC Motors
Frame Size (Mounting Face) (in)	2.125
Motor Frame Size (in)	2.125
Gear Frame Size (in)	n/a
Overall Body Length (in)	4.668
Supply Voltage (V)	24
Continuous Output Torque (oz-in)	26
Output Speed @ Cont. Torque (RPM)	3200
Current @ Cont. Torque (A)	3.7
Continuous Output Power (W)	61
No Load Current (A)	0.26
No Load Output Speed (RPM)	3630
Peak Current (A)	24
Peak Output Torque (oz-in)	200
Motor Constant (oz-in/√W)	8.63
Motor Torque Constant (oz-in/A)	8.67
Motor Voltage Constant (V/krpm)	6.41
Terminal Resistance (Ohms)	1.01
Inductance (mH)	1.6
Coulomb Friction Torque (oz-in)	1.6
Viscous Damping Factor (oz-in/krpm)	0.18
Electrical Time Constant (ms)	1.6
Mechanical Time Constant (ms)	7
Thermal Time Constant (min)	29
Thermal Resistance (°C/Watt)	7.7
Maximum Winding Temperature (°C)	155
Rotor Inertia (oz-in-s ²)	0.0037
Output Bearing	Ball
Gear Series	n/a
Gear Ratio (xx.x:1)	n/a
Gear Type	n/a
Gear Efficiency	n/a
Gear Maximum Torque (oz-in)	n/a
Encoder Series	E30B
Encoder Resolution (CPR)	500
Encoder Output Channels	3
Weight (Mass) (oz)	37
Voltage Note	n/a
Torque Warning	n/a

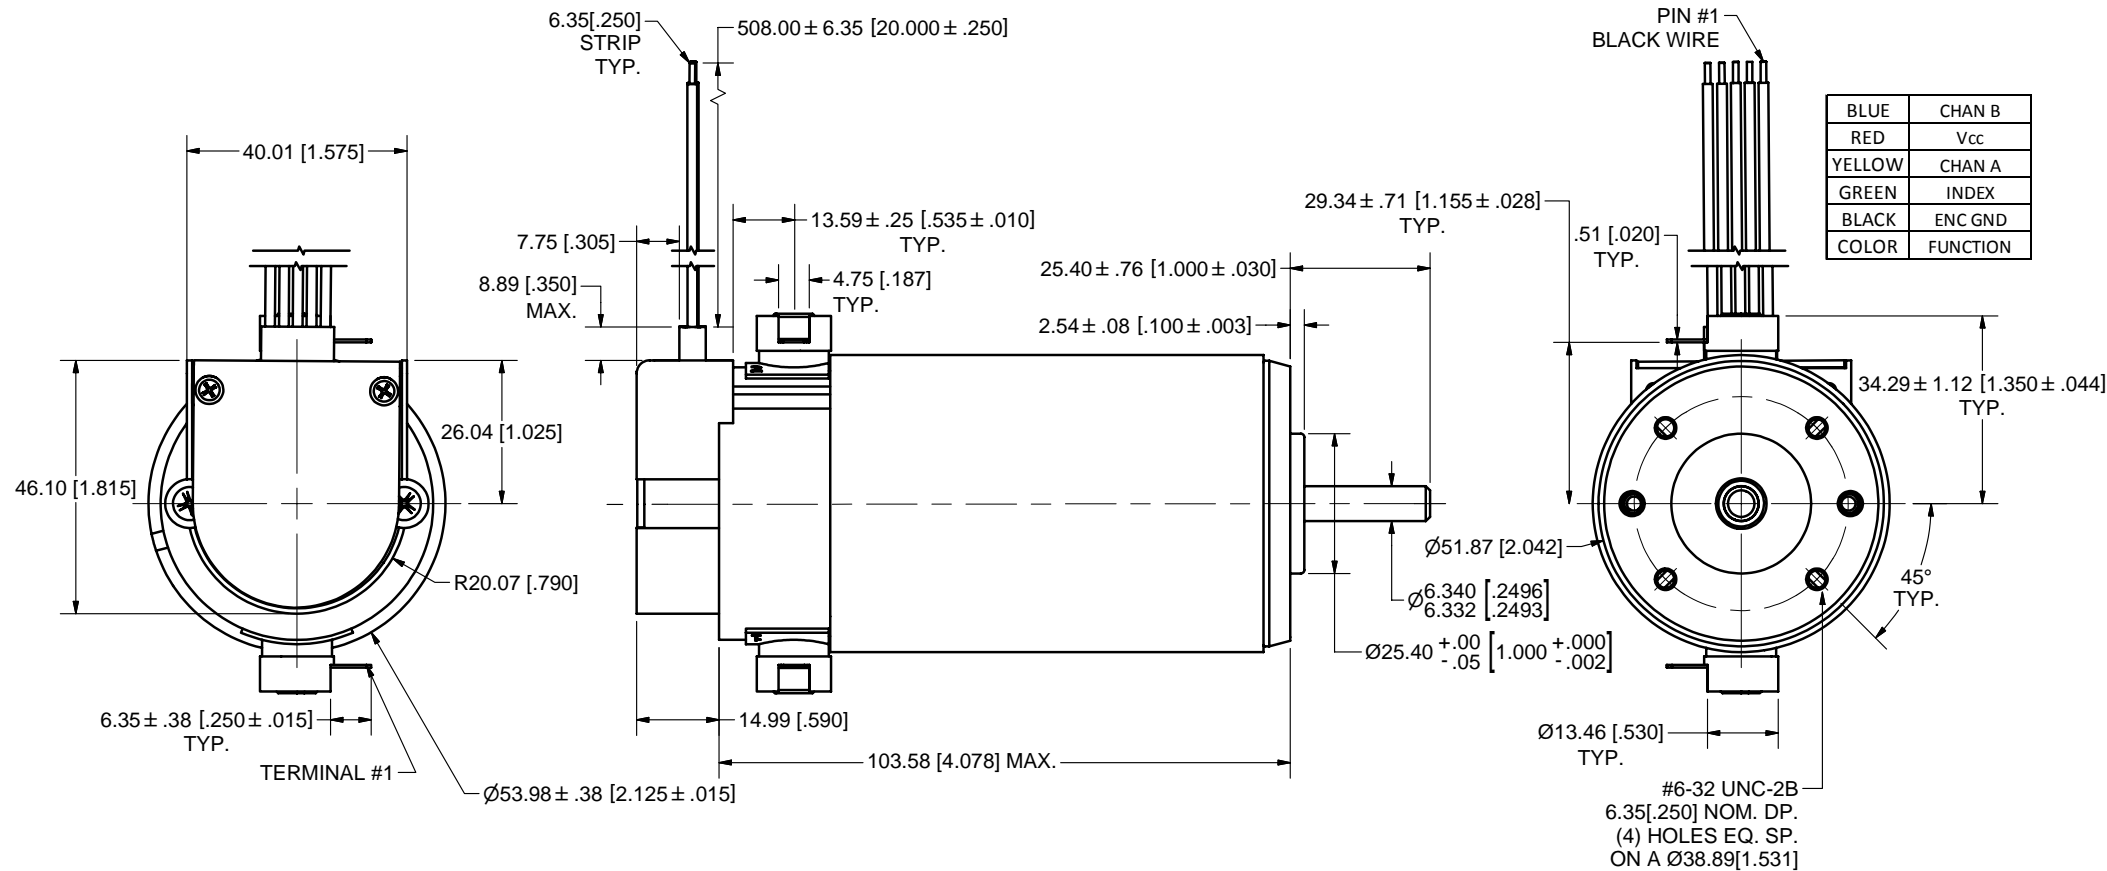

COLOR	FUNCTION
BLUE	CHAN B
RED	Vcc
YELLOW	CHAN A
GREEN	INDEX
BLACK	ENC GND

