


LED OUTDOOR
UP-DOWN - CCT & WATTAGE SELECTABLE CYLINDER
 10", 12", 18" - BLACK




10"

LR40336




12"

LR40337




12"

LR40338



18"

LR40339



UP/DOWN

CCT

WATTAGE

SELECTABLE

DIMMABLE

TRIAC/0-10V*



120-277V



5 YEAR WARRANTY


ELECTRICAL

MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
LR40336	LEDCWS10/UD/3WO/3CCT/PC/UNV/D/BK	12	120-277V	80	50,000	\$ 2.16
		15				
		18				
LR40337	LEDCWS12/UD/3WO/3CCT/PC/UNV/D/BK	18	120-277V	80	50,000	\$ 3.61
		24				
		30				
LR40338	LEDCWS12/HO/UD/3WO/3CCT/PC/UNV/D/BK	20	120-277V	80	50,000	\$ 4.81
		30				
		40				
LR40339	LEDCWS18/HO/UD/3WO/3CCT/PC/UNV/D/BK	20	120-277V	80	50,000	\$4.81
		30				
		40				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	BEAM SPREAD	ETL
LR40336	LEDCWS10/UD/3WO/3CCT/PC/UNV/D/BK	3000K	CCT SELECT	1200	80	30°	YES
		4000K		1500			
		5000K		1800			
LR40337	LEDCWS12/UD/3WO/3CCT/PC/UNV/D/BK	3000K	CCT SELECT	1800	80	40°	YES
		4000K		2400			
		5000K		3000			
LR40338	LEDCWS12/HO/UD/3WO/3CCT/PC/UNV/D/BK	3000K	CCT SELECT	2000	80	25°	YES
		4000K		3000			
		5000K		4000			
LR40339	LEDCWS18/HO/UD/3WO/3CCT/PC/UNV/D/BK	3000K	CCT SELECT	2000	80	25°	YES
		4000K		3000			
		5000K		4000			

SWITCH SETTINGS

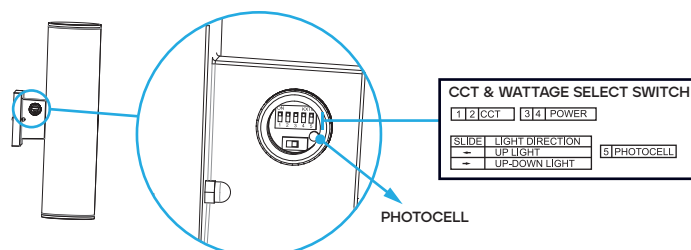

DIMENSIONS

