


TAPERITE™ TAPE LIGHT

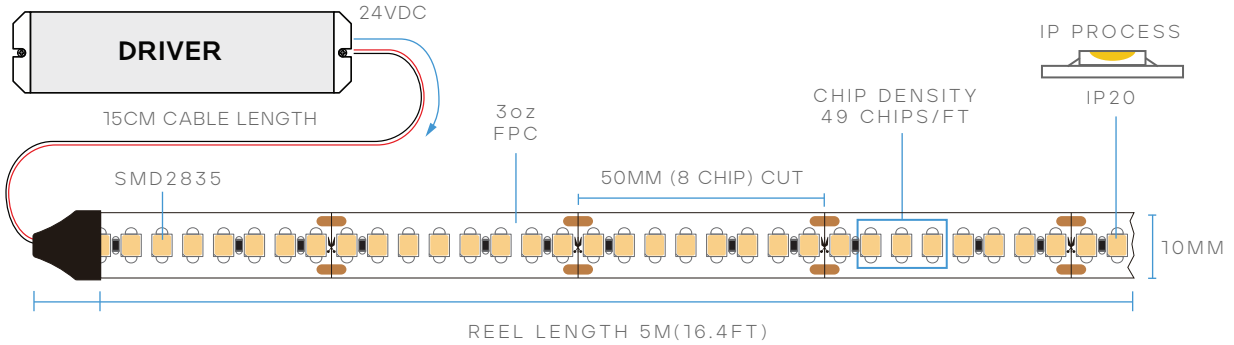

LR44120

6W/FT
96W/REEL
IP-20
HIGH EFFICACY
CRI 90
BEAM SPREAD 120°
24V
10MM
3oz FPC
16.4' REEL
UL LISTED

MODEL	DESCRIPTION	COLOR (CCT)	LUMEN/FT	WATTAGE /FT	WATTAGE /REEL	EFFICACY
LR44120	LEDTL/2835/160/19.2/927/IP20/24V/HE/5M	2700K - WARM WHITE	820	6W	96W	140lm/w

CHIP

CHIP:	SMD2835	WIDTH:	10MM
CHIP GROUP:	8	CHIP WATT:	1W
CUT SIZE:	50MM	CHIP QTY:	49/FT

INSTALLATION

ADHESIVE:	9448A 3M TAPE
CABLE LENGTH:	15CM
MAX. RUN:	5M/16.4FT

PACKAGING

CASE:	50 ROLLS
-------	----------

COMPATIBLE CONNECTORS

TAPE TO TAPE	TAPE TO TAPE CORNER	TAPE TO CABLE	TAPE TO CABLE TO TAPE
LR44705 STANDARD LR44800 HEAVY DUTY 10A	LR44803 HEAVY DUTY 10A	LR44707 STANDARD LR44805 HEAVY DUTY 10A	LR44709 STANDARD LR44807 HEAVY DUTY 10A

COMPATIBLE CHANNELS *ALUMINUM CHANNEL REQUIRED FOR HEAT DISSIPATION

LR43150	LR43130	LR43210	LR43300	LR43160	LR43100	LR43220	LR43310	LR43330
LR43170	LR43110	LR43230	LR43320	LR43340	LR43280	LR43190	LR43120	LR43200
LR43290	LR43250	LR43140	LR43080	LR43090				