


TAPERITE™ TAPE LIGHT

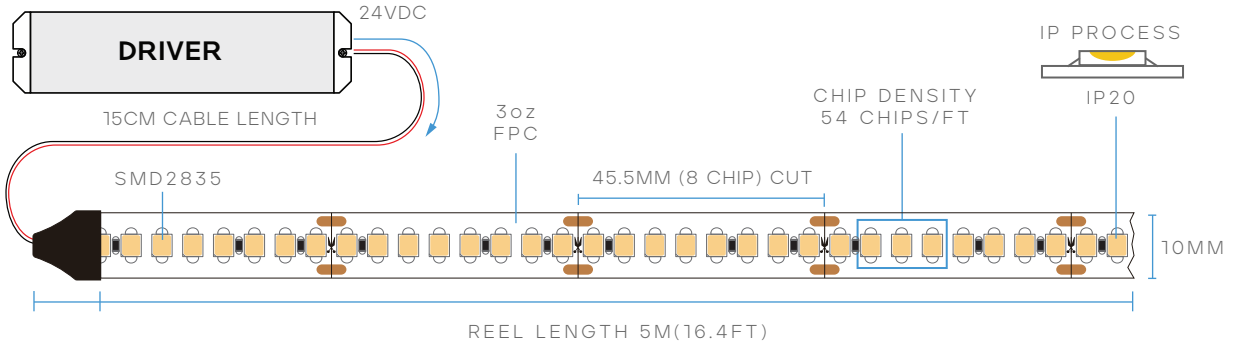

LR44302

6W/FT 96W/REEL IP-20 CRI 94 BEAM SPREAD 120° 24V 10MM 3oz FPC 16.4' REEL cUL US LISTED

| MODEL | DESCRIPTION | COLOR (CCT) | LUMEN/FT | WATTAGE /FT | WATTAGE /REEL | EFFICACY |
|---------|--|-----------------|----------|-------------|---------------|----------|
| LR44302 | LEDTL/2835/176/19.2/935/IP20/24V/HC/5M | 3500K - NATURAL | 644 | 6W | 96W | 110lm/w |

CHIP

| | | | |
|-------------|---------|------------|-------|
| CHIP: | SMD2835 | WIDTH: | 10MM |
| CHIP GROUP: | 8 | CHIP WATT: | 0.5W |
| CUT SIZE: | 45.5MM | CHIP QTY: | 54/FT |

INSTALLATION

| | |
|---------------|---------------|
| ADHESIVE: | 9448A 3M TAPE |
| CABLE LENGTH: | 15CM |
| MAX. RUN: | 5M/16.4FT |

PACKAGING

| | |
|-------|----------|
| CASE: | 50 ROLLS |
|-------|----------|

COMPATIBLE CONNECTORS

| | | | |
|--|----------------------------|--|--|
| | | | |
| TAPE TO TAPE | TAPE TO TAPE CORNER | TAPE TO CABLE | TAPE TO CABLE TO TAPE |
| LR44705 STANDARD LR44800 HEAVY DUTY 10A | LR44803 HEAVY DUTY 10A | LR44707 STANDARD LR44805 HEAVY DUTY 10A | LR44709 STANDARD LR44807 HEAVY DUTY 10A |

COMPATIBLE CHANNELS *ALUMINUM CHANNEL REQUIRED FOR HEAT DISSIPATION

| | | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| | | | | | | | | |
| LR43150 | LR43130 | LR43210 | LR43300 | LR43160 | LR43100 | LR43220 | LR43310 | LR43330 |
| | | | | | | | | |
| LR43170 | LR43110 | LR43230 | LR43320 | LR43340 | LR43280 | LR43190 | LR43120 | LR43200 |
| | | | | | | | | |
| LR43290 | LR43250 | LR43140 | LR43080 | LR43090 | | | | |