


TAPERITE™ TAPE LIGHT

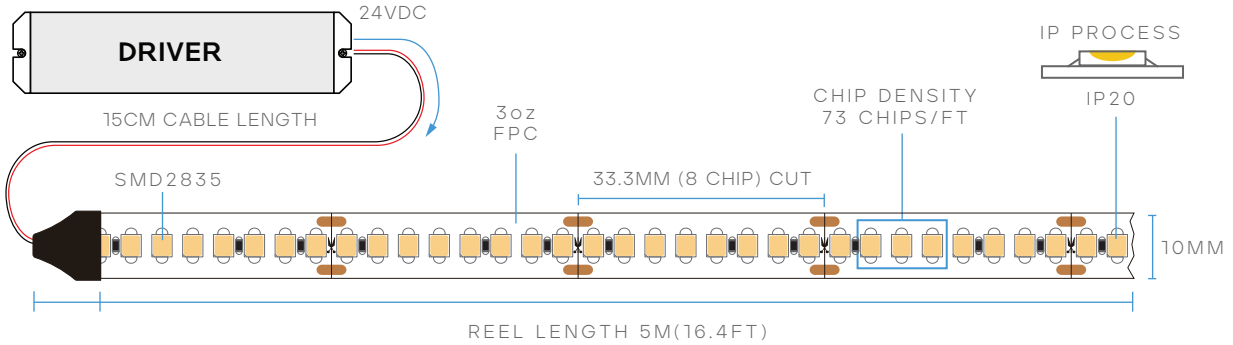

LR44500

7W/FT
115W/REEL
IP-20
HIGH DENSITY
HIGH EFFICACY
CRI 80
BEAM SPREAD 120°
24V
10 MM
3oz FPC
16.4' REEL
UL LISTED

MODEL	DESCRIPTION	COLOR (CCT)	LUMEN/FT	WATTAGE /FT	WATTAGE /REEL	EFFICACY
LR44500	LEDTL/2835/HD240/23/27K/IP20/24V/HE/5M	2700K - WARM WHITE	982	7W	115W	140lm/w

CHIP

CHIP:	SMD2835	WIDTH:	10MM
CHIP GROUP:	8	CHIP WATT:	1W
CUT SIZE:	33.3MM	CHIP QTY:	73/FT

INSTALLATION

ADHESIVE:	9448A 3M TAPE
CABLE LENGTH:	15CM
MAX. RUN:	5M/16.4FT

PACKAGING

CASE:	50 ROLLS
-------	----------

COMPATIBLE CONNECTORS




TAPE TO TAPE

LR44705 STANDARD
LR44800 HEAVY DUTY 10A



TAPE TO TAPE CORNER

LR44803 HEAVY DUTY 10A



TAPE TO CABLE

LR44707 STANDARD
LR44805 HEAVY DUTY 10A



TAPE TO CABLE TO TAPE

LR44709 STANDARD
LR44807 HEAVY DUTY 10A

COMPATIBLE CHANNELS *ALUMINUM CHANNEL REQUIRED FOR HEAT DISSIPATION

