


## TECHNICAL SPECIFICATIONS

### Harness 5pt., Grommet Legs, Padded Back, Back/Side D-Rings.

5 point adjustment harness. Pass Through Chest, Tongue Buckle Legs, Hip D-Rings, Sewn In Back Pads. Fall Indicators. Multiple sizes. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

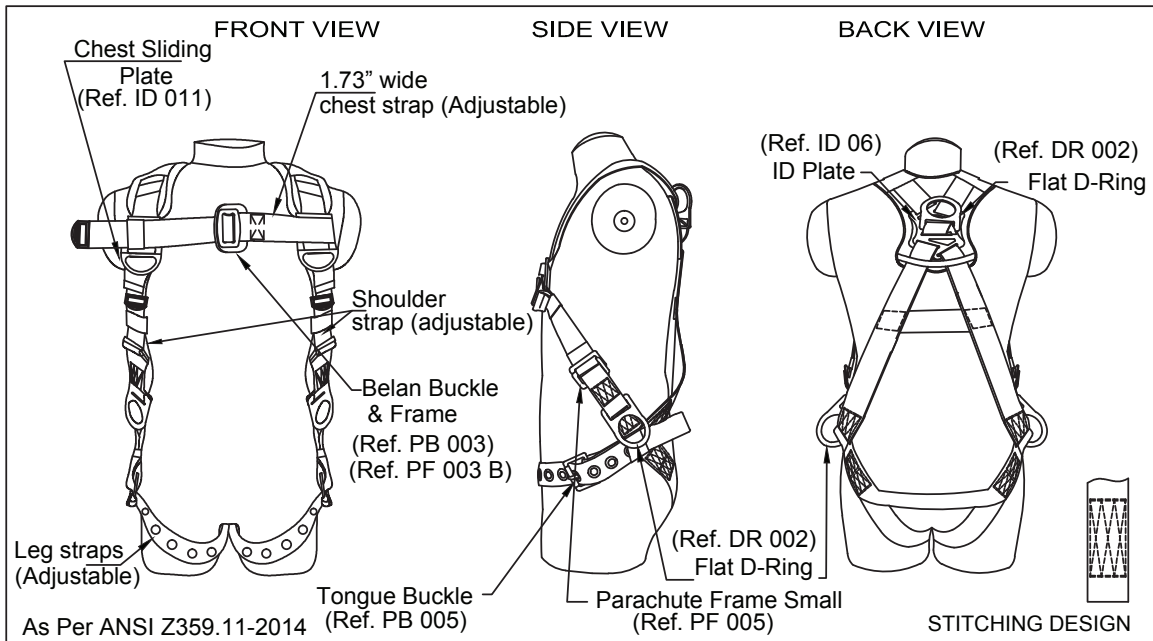

**USER CAPACITY:**

- 130 – 310 lbs. (59 -140 kg)

**DESIGN:**

- Dorsal D-ring for fall arrest.
- Adjustable Shoulder straps.
- Adjustable grommeted leg straps.
- Two side D-rings for work positioning

**WEBBING:**

Material: Polyester  
 Width: 1.73 in. ± 0.04 in.  
 Breaking Strength: 5000 lbs.

Part #	Color
H21210111	Red
H21210115	Yellow
H21210116	Green

**STITCHING THREAD:**

Material: High-tenacity polyester

**METAL COMPONENT:**

High Strength Steel  
 Plating: Zinc plated  
 Finish: Shot blasted

**VITAL TEST COMPLIANCE:**

Static Strength: 3600 lbs. for 1 Minute  
 Dynamic performance: Free fall from 6 feet height done to a test dummy weighing 220.46 lbs. at dorsal attachment element. Harness should not release the dummy for 5 minutes (Retention time).

**WEIGHT OF HARNESS:**

3.97 lbs. ± 0.02 lbs.