

INSTALLATION INSTRUCTIONS - INS247

CASTER CAMBER KIT

Part # 2553 // 2015-2018 Ford Mustang



Special Tools required: Hydraulic-Jack, Jack-Stands, Spring Compressor, Wrenches and Sockets.



Install Time: 3 Hours



Difficulty: Average



Note! After Installation a professional wheel alignment is recommended.

MADE IN U.S.A.

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019

FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

STEP 1



Place the front of the vehicle onto jack stands so that the wheels are off the ground.

STEP 2



Remove the strut tower brace if applicable. Starting with either driver side or passenger side remove the wheel. Disconnect the brake line bracket and detach the ABS sensor wire from the strut body.

STEP 3



Remove the sway bar end link from the strut, then loosen but do not remove the strut mounting bolts.

STEP 4

If equipped, remove the strut tower brace. Remove the 3 upper strut mount nuts, located on top of the strut tower.

 **MADE IN U.S.A.** 

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019


BBK PERFORMANCE LLC
3060 Performance Circle
Deland, FL 32724

For any questions, email us:
TECH@BBKPERFORMANCE.COM



FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

STEP 5

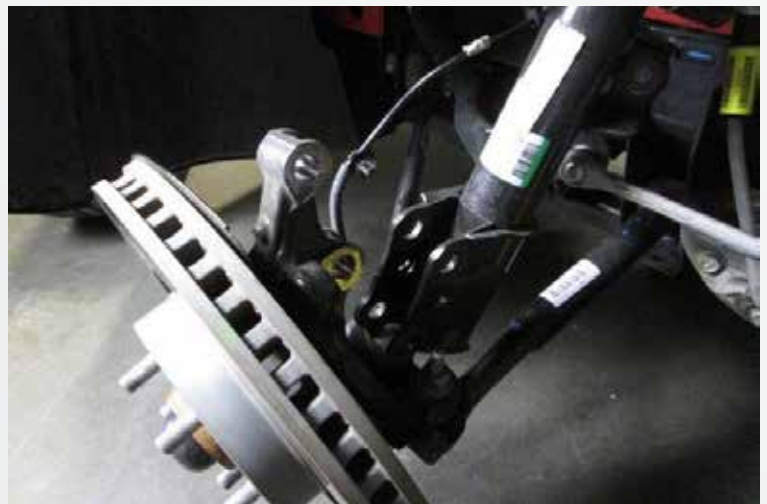

Support the lower control arm with a floor jack, remove the lower strut mounting bolts and lower the floor jack to remove the strut assembly.

MADE IN U.S.A.

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019



FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

STEP 6



With a spring compressor, slowly depress the spring, then remove the upper strut retaining nut, then remove the upper strut mount assembly from the strut shaft. **NOTE!** Recommend the use of an impact gun.

CAMBER/CASTER PLATE ASSEMBLY

STEP 7



Determine which Camber/Caster Plate is driver or passenger side by looking at the engraved Sub2553-D for Driver side and Sub2553-P for Passenger side. Install the 2 provided stud plates from the bearing plate, with the studs protruding through the slots. **NOTE!** Make sure the larger radius between the 2 studs of each plate face the bearing.

 **MADE IN U.S.A.** 

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019

FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

STEP 8



Place the Caster Plate on top of the bearing plate. Make sure that the raised lip around the bearing plate protrudes up through the center slot of the Caster Plate.

STEP 9



Install the Camber/Caster Assembly to the supplied Ford Strut Tower Pivot Assembly.

NOTE! Use extreme caution, once the Camber/Caster Plate is installed to the Pivot Assembly it CAN NOT be removed. If removed it can cause serious damage to the top strut mount.

STRUT AND SPRING RE-ASSEMBLY

STEP 10

Place the Camber/Caster Assembly onto the Strut Assembly. Make sure to correctly align the top "pigtail" of the spring with the vertical face on the stock rubber isolator, and the bottom "pigtail" of the spring with the vertical face on the lower spring perch.

STEP 11

Re-install the upper strut retaining nut and washer if used. Make sure both pigtails are properly located both in the lower spring perch and on the upper rubber isolator as you loosen the spring compressor.

STEP 12

Check the bottom of the strut tower housing for any roughness. Use a Sander or sand paper to smooth out the Housing.

NOTE! Must be smooth to allow the Camber/Caster Assembly to slide freely when adjusting.

STEP 13

Snug all 3 nuts on the Camber/Caster assembly.

STEP 14

Re-attach the strut to the spindle and torque the lower mounting bolts to 166 ft-lbs. Re-attach the brake line bracket and ABS sensor wire. Re-attach the sway bar end-link to the strut and torque the mounting nut to 85 ft-lbs.

 **MADE IN U.S.A.** 

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019



FOLLOW THESE INSTRUCTIONS CAREFULLY TO ENSURE CORRECT FITMENT AND OPERATION

DRIVE-ABLE ALIGNMENT SETTINGS

STEP 15

Loosen the nuts on the Camber/Caster Plate assembly very slightly, until the plate can barely slide. Slide the entire assembly towards the front of the vehicle and tighten the 17mm Nut.

STEP 16

Center the strut shaft in the strut tower opening side to side. Once its center then tighten the 17mm nuts.

STEP 17

Re-install the wheels and safely lower the vehicle, torque the lug nuts to factory specifications.

IMPORTANT INFORMATION!

- The vehicle must now have a proper front end alignment.
- Make sure the technician knows that the Camber/Caster Plate will not move if the front suspension is loaded. The front end must be raised. BOTH front wheels must be off the ground in order to adjust the camber and caster.
- This Camber/Caster Plate Assembly has 1.68-degree continuous range of camber adjustment and 0.9-degree continuous range of caster adjustment and provides correction for OEM production tolerances.

 MADE IN U.S.A. 

IMPORTANT: All appropriate safety equipment and gear must be used during the installation of this or any BBK Performance products or any time you work on a vehicle. BBK Performance accepts no responsibility for injuries or damage caused by or during the installation of this product.

UPDATED LAST: March 2019