

GOOLOO
ENRICH YOUR DRIVING LIFE





Jump Starter User Manual
Model:GP Warrior

Thanks for choosing GOOLOO jump starter.
Please read this manual carefully before using and keep it for review.

GOOLOO

Accessories


- 1 x Main Unit (Jump Starter)
- 1 x Smart Jumper Cable
- 1 x Micro USB Cable
- 1 x Kit Bag
- 1 x User Manual

1

GOOLOO

Product Introduction

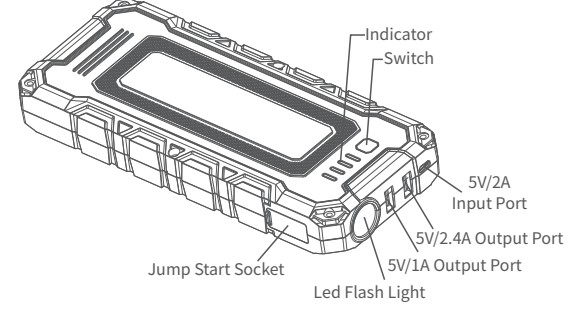

Function Introduction

1.Indicator
Press the Power button to check the remaining battery of GOOLOO GP Warrior.

Indicator	Unit	1 solid	2 solid	3 solid	4 solid
Remaining power	0%	25%	50%	75%	100%


2

GOOLOO

The indicator will flash one by one when charging. Different numbers of solid indicators show different battery storage level of GOOLOO starter. All indicators light are off when charging is paused or completed.

2.Recharge the unit

- 1) Plug the USB charging cable to any working USB output port.
- 2) Connect the Micro connector to the GP Warrior host.

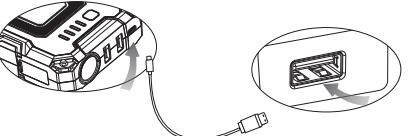


3.How To Jump Start Your Vehicle
GOOLOO GP Warrior is designed for jump starting 12V vehicle batteries.

Step 1: Fully plug the blue connector of the clamp cable into the jump starter socket, and make sure the Indicator on the clamp cable is off.


3

GOOLOO

Step 2: Connect Red Clamp to the positive(+) battery terminal and Black Clamp to the negative(-) battery terminal.




Step 3: Operate according to the Indicator on the clamp cable:
GREEN LIGHT on: Telling the connection is correct and the circuit is working, you can turn on the engine to jump start directly.




4

GOOLOO


RED LIGHT on with buzzing: Telling the connection is wrong, and buzzing to alarm to correct the clamps as step 2 mentioned above, wait until the GREEN LIGHT is on to turn on the engine.



GREEN LIGHT blinking with buzzing: Telling the vehicle battery is low, press the "BOOST" button, wait till GREEN LIGHT becomes solid, then turn on the engine within 30s.




No Lights on, No buzzing: Telling the vehicle's battery may be damaged, after confirming that the clamps connection is correct, press the "BOOST" button, wait till GREEN LIGHT is on, and then turn on the engine within 30s.




5

GOOLOO

Step 4: Start the vehicle.



Step 5: When the vehicle is started, remove the clamp cable from the jump starter first, then remove the clamps from your vehicle battery.



CAUTION:

- Occasionally, the jump starter will lock itself down for safety, due to (a) short-circuit; (b) over-current; (c) over-temperature; (d) over/low-voltage;(e) reverse-connection. Once it happens, turn off the jump starter and remove the battery clamps from your car battery, restart the jump starter & connect the clamps back on the battery, try it again.
- If the vehicle does not start within 3 seconds, stop starting and wait at least 30 seconds before attempting to restart the vehicle. Don't jump start the vehicle continuously more than four times as it may damage the unit. Check your vehicle for other possible reasons of not starting.


6

GOOLOO

- During jump starting, avoid the positive and negative battery clamps touching each other. Otherwise, electric spark will appear, result in a safety hazard and damage the unit by short circuit.
- This unit contains a lithium polymer battery. It is only used as an emergency power but not to take place of a car battery. Always comply with transport and safety regulations in use and disposal of such batteries.

4. Charge your phone or tablet

Step 1: Plug the switch cable to USB output port.
Step 2: Select appropriate connector and connect it to your mobile phones or tablet.
Step 3: Press the switch button to charge.
Step 4: If doesn't work, please try another USB Cable or USB Output port.

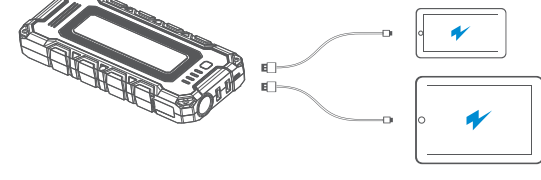

5. Use the LED flash light

- Long press the Power button for 3 seconds to start the LED flash light.
- Short press the Power button, there are 3 modes of LED light appear: torch light, strobe or SOS switchable.

7

GOOLOO

FAQ

Q. How to turn off this appliance?
A. This appliance will shut-off automatically when no load or charging is completed.

Q. How to jump start a vehicle with GOOLOO jump starter?
A. 1) Make sure it is over 60% charged. If have not use it more than two months, please charge it first.
2) Turn on it and connect the red clamp to "+", the black clamp to "-", end of the car battery.
3) Start the car, unplug the jumper cables from the jump starter within 30 seconds, and remove the clamps from your car battery.

Q. What should I do if the GOOLOO jump starter cannot be charged?
A. Charge it with different charging cable to recharge it for test. If it still not works, email us via contact@gooloo.com (Within 12 months warranty period, and please attach your order ID, it is necessary for our confirmation)

Q. What should I do if GOOLOO jump starter cannot charge other devices?
A. Using a different charging cable to charge again, if it can work, it must be defective of the charging cable, email us and we will provide you a new cable. If it still not work, email us via contact@gooloo.com (Within 12 months warranty period, and please attach your order ID, it is necessary for our confirmation)

Q. How long does the battery last in sleeping mode?
A. 6-12 months, however, we suggest to recharge it every 3 months.


8

GOOLOO


TROUBLE SHOOTING

Finding	Cause	Remedies
No response when pressing the power button.	Low voltage protection of GOOLOO starter is started.	Plug the adaptor into the 5V/2A input port to activate.


Attention




Recharge at least once every 3 months




Use original or certified cables




Do not expose to liquids



Do not modify or disassemble



Avoid dripping



Avoid extreme temperatures

9

GOOLOO

Warning

- Read the instruction manual carefully before using this unit.
- The product need to be fixed in place when you keep it in the trunk.
- Do not place the product in any high-intensity magnetic field in order to avoid any damage to its components.
- Before the first using, please charge the jump starter for at least 3 hours.
- Please keep the remaining power above 20%.
- Keep children away from this unit.
- Do not use this unit if any cable clamp or cord is damaged.
- Never use or remain the unit on car battery after cranking the car.
- Make sure the blue plug of the jumper cable is fully plugged into jumping socket, otherwise, the blue plug would be melted.
- Make sure and check the battery connections and the battery clamps are well connected before jumping start if the battery terminals on the vehicle are dirty or corroded, the power of the unit will be lessened.
- Remove the product from the vehicle battery within 30 seconds of Jump Starting. If not, it could lead to damage.
- Do not operate the product in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
- Remove personal metal items like rings, bracelets, necklaces, etc., when using the products.
- Do not use the unit to jump start a vehicle while charging the internal battery.
- If this unit is leaking liquid, dispose it at proper recycle facility immediately. If a liquid is noticed coming from product, do not handle with bare hands. If the jump starter is inflating, please stop using it.
- Do not toss it into the trash or your regular recycling bin after used. Please recycle it according to your local environmental rules.

10






GOOLOO

SPECIFICATION

Battery Capacity: 20800mAh/76.96Wh
Starting Current: 500A(3s)
Peak Current: 2000A
Output: 5V=1A, 5V=2.4A
Input: 5V=2A
Full Charging Time: 5-6 hours
Discharge Temp: -20°C-45°C
Charge Temp: 0°C-45°C
Main unit N.W. (g): 580g
Size: 208*69*28.5mm(L*W*H)

Warranty & Customer Service

Customer Service
One-year warranty from the date of purchase. If you have any questions/problems about using the product, please feel free to contact us, our customer service team are always at your service: contact@gooloo.com

11