

Arnsberg

Das Licht

customerservice@arnsberg.com

www.arnsberg.com

ASSEMBLY INSTRUCTIONS FOR **GRANNUS** 603900301

Parts Included

Please begin installation by accounting for and familiarizing yourself with all included parts.

Mounting Screw



Outlet Box screw



Wire Connector




Mounting Strap



CSA / UL SAFETY REQUIREMENTS

CSA/UL requires that these IMPORTANT SAFETY INSTRUCTION be listed:

- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.
- Consult a qualified electrician if you have any electrical questions or need to replace the driver.

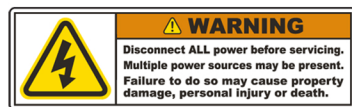

Care Instructions


Arnsberg suggest using only micro fiber cleaning cloth to clean this fixture. If required, a slightly damp cleaning cloth may be used to spot clean. Do not use common household cleaners on this fixture, as the final finish may be damaged as a result. Enjoy your new Arnsberg fixture.

Arnsberg

customerservice@arnsberg.com

www.arnsberg.com

Mounting Instructions

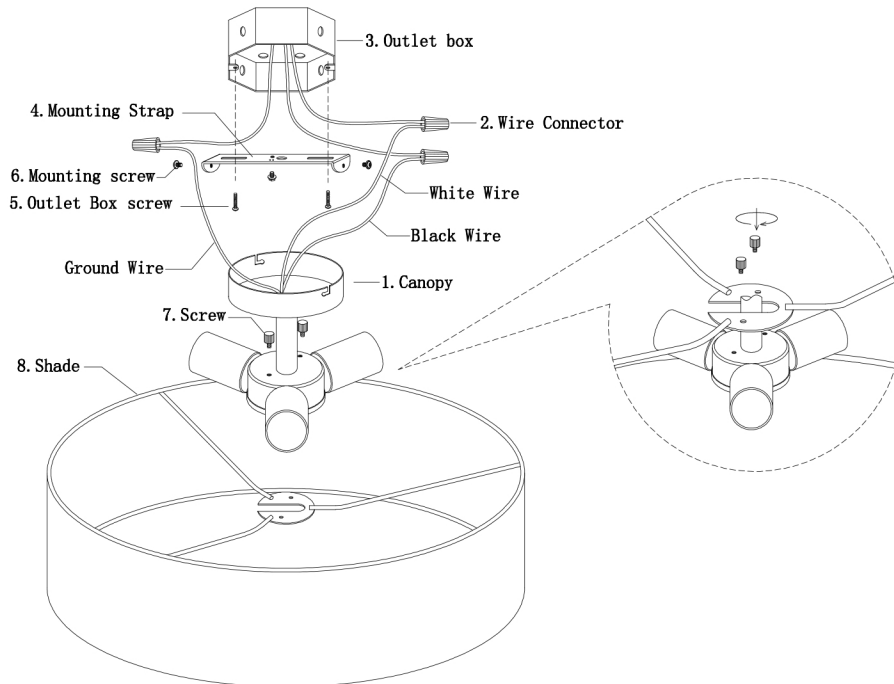

ASSEMBLY INSTRUCTIONS FOR **GRANNUS** 603900301

Assembly Instructions

1. Screw the Mounting Screw (#6) into the Mounting Strap (#4). Mount the Mounting Strap (#4) to the Outlet Box (#3) (Make sure the heads of the Mounting Screw (#6) are facing outside when the Mounting Strap (#4) is attached to the Outlet Box (#3)).
2. Connect the ground wire from the fixture to the ground wire from the Outlet Box (#3). Connect the white wire from the fixture to the white wire (neutral wire) from the Outlet Box (#3). Connect the black wire from the fixture to the black wire (live wire) of the Outlet Box (#3). Cover the connections using the Wire Connectors (#2). Wrap the wire connectors with electrical tape for a more secure connection. Position the wires back inside the Outlet Box (#3). Note: If you have electrical questions, consult your local licensed electrician.
3. Place the Canopy (#1) over the Outlet Box (#3), Allow the Heads of the Mounting Screws (#5) to come out through the large end of the keyholes of the Canopy (#1). Twist the Canopy (#1) until the heads of the Outlet Box Screws (#5) slide into the narrow ends of the keyholes. Screw the Outlet Box Screws (#5) to secure the Canopy (#1).
4. Mount the Shade (#9) on top of the Socket (#8) by using the Screw (#7)
5. installation is complete, Turn on the power at the circuit breaker of the fuse box. Turn the light switch on to activate the fixture.