

# Nodes Large Pivot Wall

**KW1031** | 1.0

GENERATION LIGHTING

## Wall

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

These instructions show a typical installation.

**CAUTION - RISK OF FIRE**  
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
Use minimum 90°c supply conductors.



GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077


800.969.3347

[www.generationlighting.com](http://www.generationlighting.com)

© 2019 Generation Lighting. All rights reserved.  
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

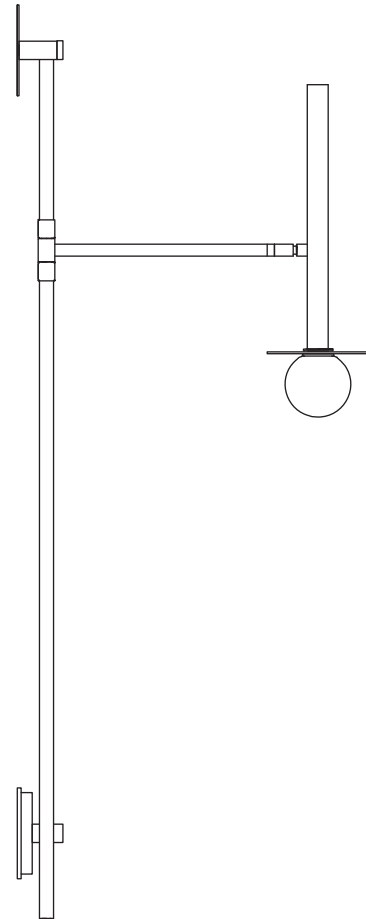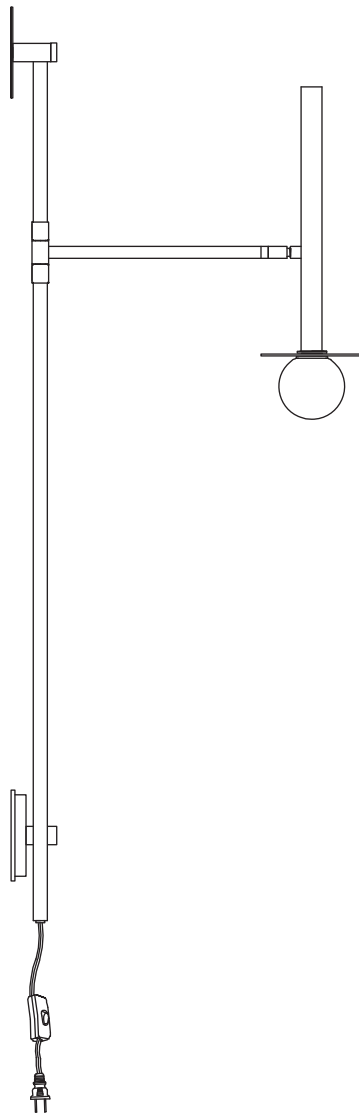

**SAVE THESE INSTRUCTIONS!**

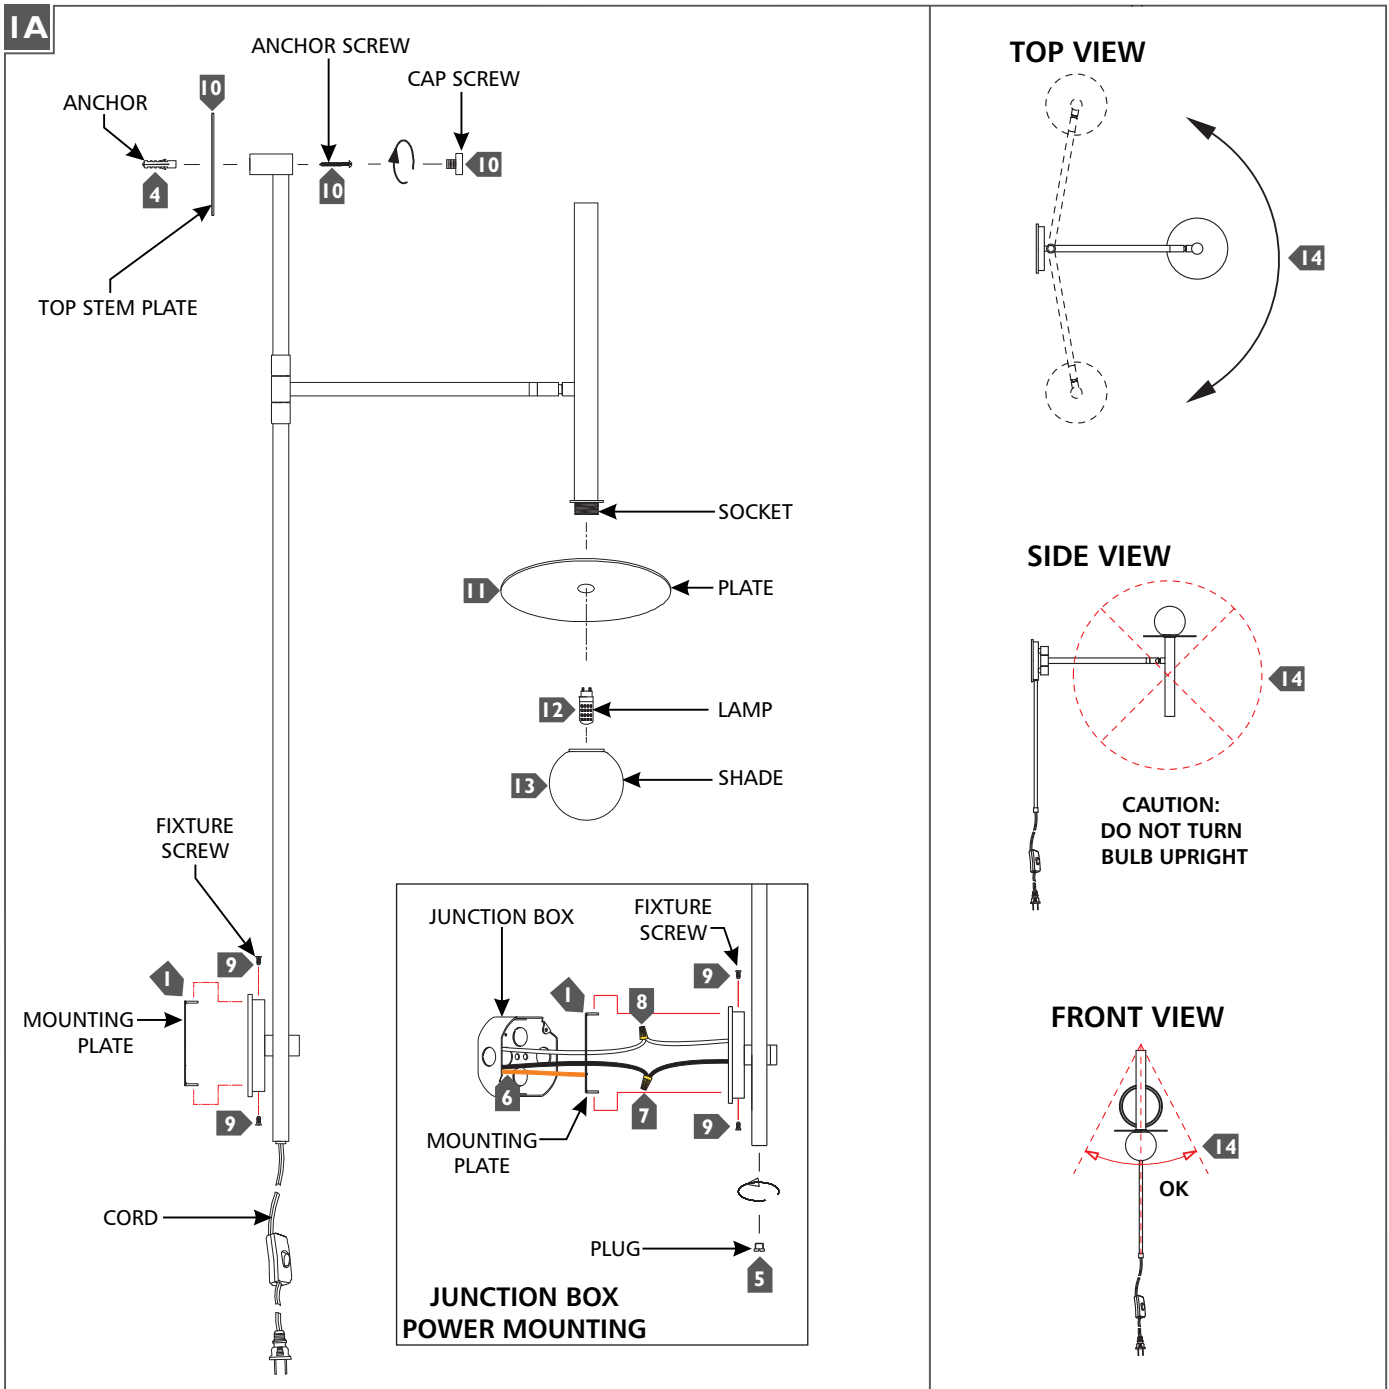

- 1** Properly secure the mounting plate to the junction box (or wall for cord plug in install).
- 2** Temporarily install the fixture to the mounting plate using the fixture screws.
- 3** Mark the anchor hole location through the hole on the top of the fixture, then remove the fixture from the junction box.
- 4** Drill an appropriate sized hole at the marked location and install the anchor. **For plug in cord mounting, skip to step 9.**
- 5** **Junction box power mounting:** disconnect the cord wires from the fixture wires by removing the wire nuts, carefully pull the cord out of the fixture, then close the cord hole by screwing the provided plug.
- 6** Connect the fixture ground wire to a suitable ground in accordance with local electrical codes.
- 7** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8** Connect the black fixture wire to the hot power line wire with a wire nut.
- 9** Mount the fixture onto the mounting plate and secure it in place with the fixture screws.
- 10** Place the top stem plate over the anchor location, secure the top stem to the anchor with the anchor screw, then cap the mounting hole with the cap screw.
- 11** Place the plate over the socket.
- 12** Install the lamp by pushing the lamp pins completely into the socket holes. Refer to the label on the socket for Max Wattage Information.
- 13** Install the shade by screwing it onto the socket
- 14** Adjust the fixture arm to the desired position, see diagram for adjustability limitations .