


ASSEMBLY INSTRUCTIONS

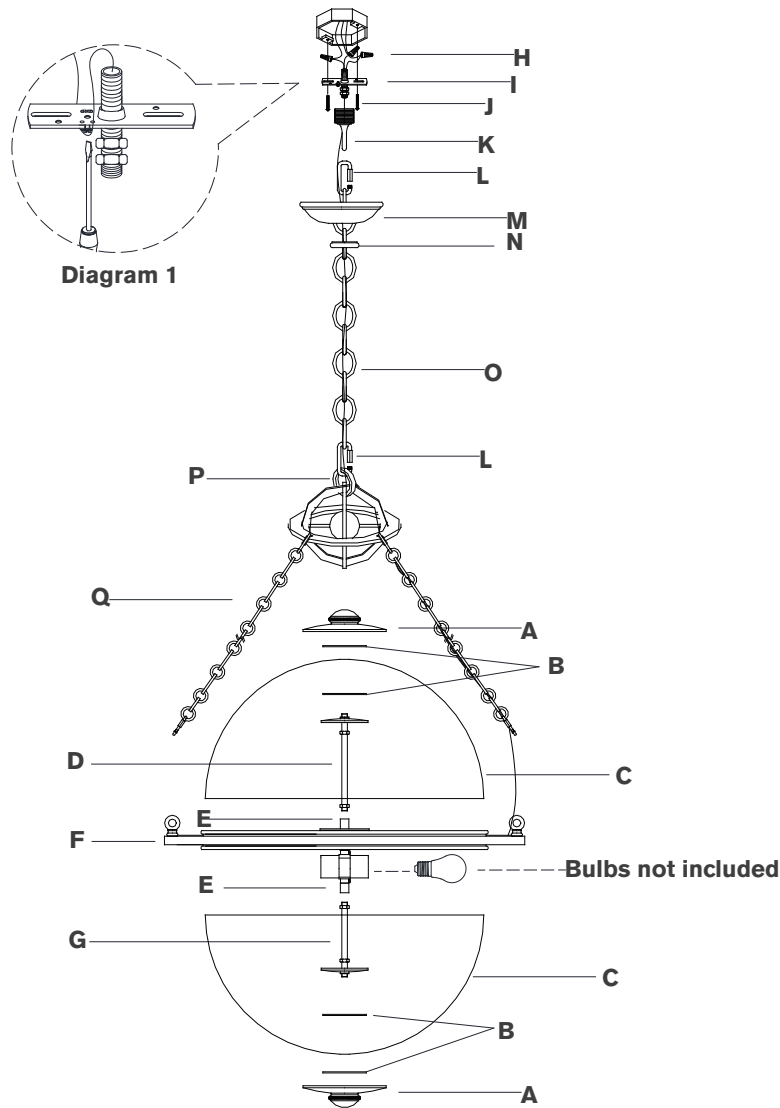

Modern Globe Pendant

Item # CHC 2135

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers		

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove collar loop (**K**) from chain (**O**) by removing quick link (**L**).
- Install mounting plate (**I**) to junction box and secure with mounting screws (**J**).
- Secure collar loop (**K**) to mounting plate (**I**) using pliers to tighten locknut.
- Install canopy (**M**) to collar loop (**K**) by securing with collar ring (**N**).
- Determine desired overall length, and amount of chain (**O**) needed. Shorten chain using chain pliers. (Keep extra chain)
- Install light bulbs into the sockets.
- Thread rod (**D**) and rod (**G**) to coupling (**E**).
- Install glass shades (**C**) to ring (**F**) and secure with rubber washers (**B**) and finials (**A**).
- Hang ring (**F**) to chains (**Q**) using quick links on chains (**Q**).
- Attach chain (**O**) to collar loop (**K**) and to fixture loop (**P**) using quick links (**L**).
- Thread fixture wire and ground wire through chain (**Q**), fixture loop (**P**) and chain.

NOTE: Do not over-tighten, otherwise glass could become damaged.

NOTE: When you reach the collar loop (**K**), ensure there is no tension on the wires. Cut excess wires, being sure to leave about **12"** to reach the junction box.

