## **Air Cleaner Test Report**

Applicant : RHT Industries Limited

Address : Block B, 2/F, Goodwill Industrial Building, No. 36-44 Pak Tin Par

Street, Tsuen Wan, New Territories, Hong Kong

Application Number : N/A

Report Number : REPAP22090101

Report Issue Date : 17 Sep 2022

Total Page : 9 Pages (including this page)

This document is issued by the Company under its General Conditions of Service printed overleaf. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any older of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30days only. This document cannot be reproduced except in full, without prior approval of the Company.

# TABLE OF CONTENT

1.	Sample Description	3	
2.	Detailed Description of the sample	4 - 5	
3.	Testing Environment	6	
4.	Testing Method of Removal Efficiency	7	
5.	Result of Removal Efficiency	8 – 9	

IAQ Contractor, IAQ Control Facilities Supplier, IAQ Consultant Subsidiary company of the Hong Kong University of Science and Technology under the Entrepreneurship Program

> Page 2 of 9 Report No.: REPAP22090101

#### 1. Sample Description

Product : Air Cleaner

Brand Name : b-MOLA

Model No. : BM20

No. of Sample Received : 1

Test Date : 27 May 2022 – 27 May 2022

Test Item(s) : Pollutants Removal Efficiency

Test Requested : Ammonia

Test Reference(s) : In-house method SOP200 (for VOC removal rate)

Test Equipment : Honeywell instrument ppbRAE 3000

Equipment no. : E002 - 003

Test Result : See the attached sheets

Remark : N/A

## 2. Detailed Description of the sample





b-MOLA/BM20

#### **Acron International Technology Limited**

IAQ Contractor, IAQ Control Facilities Supplier, IAQ Consultant Subsidiary company of the Hong Kong University of Science and Technology under the Entrepreneurship Program





**NCCO Filter and HEPA** 

IAQ Contractor, IAQ Control Facilities Supplier, IAQ Consultant Subsidiary company of the Hong Kong University of Science and Technology under the Entrepreneurship Program


### 3. Testing Environment

Temperature : 26 °C

Relative Humidity : 47 %

Testing Chamber : 1m<sup>3</sup> Testing Chamber

Size (W × H × D) mm :  $1000 \times 1000 \times 1000$ 

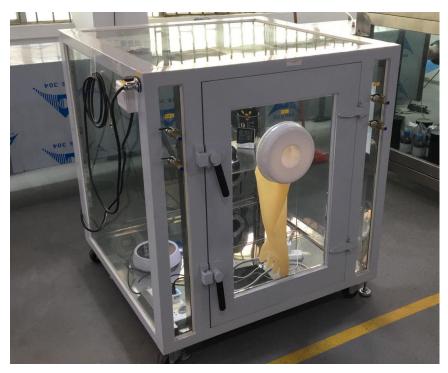

1m<sup>3</sup> Testing Chamber

Acron International Technology Limited
Your Technical Companion
HKUST Entrepreneur

#### 4. Testing Method of Removal Efficiency

In a 1m<sup>3</sup> chamber, chemical was injected into the chamber by a syringe and evaporated by a hot plate. Internal circulation was turned on throughout the test to ensure the uniformity of chemical concentration inside the chamber. Initial concentration ( $C_0$ ) of the chemical was recorded before switching on the air cleaner with a range of 100 ( $\pm$ 10) mg/m<sup>3</sup>. Then, the air cleaner is switched on for 60 minutes and the chemical concentration was recorded as  $C_{60}$ , the final concentration of chemical.

The test was repeated without the air cleaner to determine the natural decay of the chemical at the test chamber. Chemical was injected into the chamber by a syringe and evaporated by a hot plate with an initial concentration ( $C_{N0}$ ). The final concentration ( $C_{N60}$ ) was determined 60 minutes later.

New filters and HEPA have been used for each chemical test.

Report No.: REPAP22090101

### 5. Results of Removal Efficiency

Brand/ Model No.	<b>Operation Mode</b>	Test Chemical	Volume of use
			(mL)
b-MOLA/BM20	Н	Ammonia	1.8

Initial Concentration	Natural Decay, kn	Total Decay, ke	Removal Efficiency	
$(mg/m^3)$	(min <sup>-1</sup> )	(min <sup>-1</sup> )	(%)	
100.50	0.0005	0.0492	96	

Remark: Initial concentration is set within 100±10mg/m<sup>3</sup>.

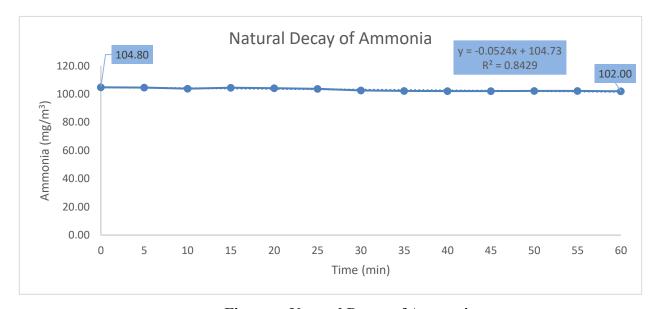


Figure a. Natural Decay of Ammonia

IAQ Contractor, IAQ Control Facilities Supplier, IAQ Consultant Subsidiary company of the Hong Kong University of Science and Technology under the Entrepreneurship Program

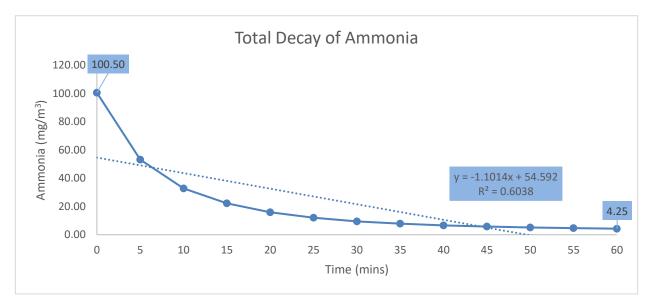


Figure b. Total Decay of Ammonia

#### Calculation:

$$A_2 = \frac{C_{N0} - C_{N60}}{C_{N0}}$$

$$R = \frac{C_0(1 - A_2) - C_{60}}{C_0(1 - A_2)}$$

R: Removal efficiency (%)

A<sub>2</sub>: Natural decay rate (%)

C: Concentration of testing subject (mg/m<sup>3</sup>)

\*\*\* End of Report \*\*\*

#### **Acron International Technology Limited**

IAQ Contractor, IAQ Control Facilities Supplier, IAQ Consultant Subsidiary company of the Hong Kong University of Science and Technology under the Entrepreneurship Program

Page 9 of 9 Report No.: REPAP22090101