


17 WATTS PER METRE

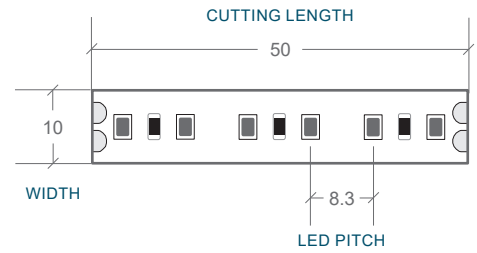

	COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
INDOOR	WARM WHITE 3000K	BL-LS-1003-WW	IP20 indoor use only	1549lm/m	91lm/W
	NATURAL WHITE 4000K	BL-LS-1003-NW		1731lm/m	102lm/W
IP65	WARM WHITE 3200K	BL-LS-1003-WW-IP65	IP65 achieved with silicone spray	1597lm/m	94lm/W
	NATURAL WHITE 4200K	BL-LS-1003-NW-IP65		1724lm/m	101lm/W
	COOL WHITE 5700K	BL-LS-1003-CW-IP65		1618lm/m	95lm/W

COLOUR VARIANCE +/- 200K
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE

LED WATTS	17W/m	CRI	≥80	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile for thermal management is required
INPUT VOLTS	24V DC constant voltage	BEAM ANGLE	120°		
OPERATING TEMP.	-20°C ~ +60°C	SOURCE LIFE	50,000 hours		
MAX. RUN PER POWER FEED	5 metres	WARRANTY	3 years	CONTROL	Dimmable by PWM signal