
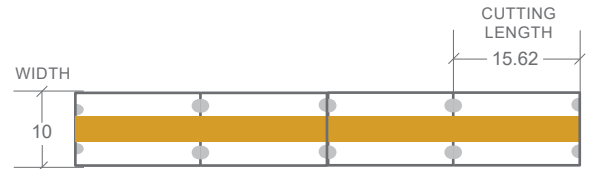


## 12W/M COB RIBBON | INTERIOR

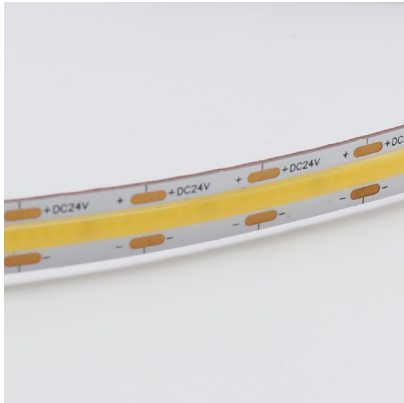

COLOUR	CODE	INGRESS PROTECTION	LUMENS	EFFICACY
WARM WHITE 3000K	BL-LS-COB12-WW	IP20 General interior use	1036lm/m	86lm/W
NATURAL WHITE 4000K	BL-LS-COB12-NW		1145lm/m	95lm/W

COLOUR VARIANCE +/- 200K  
ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE

LED WATTS	12W/m	CRI	≥90	MOUNTING	3M adhesive backing A Bright Light approved aluminium profile is required for thermal management
INPUT VOLTS	24V DC constant voltage	NUMBER OF CHIPS	512 LED/m		
OPERATING TEMP.	-25°C ~ +50°C	BEAM ANGLE	180°	CONTROL	Dimmable by PWM signal
MAX. RUN PER POWER FEED	5 metres	SOURCE LIFE	50,000 hours		
		WARRANTY	3 years		

ACCESSORIES	CODE	
INLINE QUICK CONNECTOR	BL-LS-COB-MC	
POWER FEED 490MM QUICK CONNECTOR	BL-LS-COB-PF	
FLEXIBLE 80MM QUICK CONNECTOR	BL-LS-COB-FC	

BL-LS-COB-MC

BL-LS-COB-PF

BL-LS-COB-FC