


EX-STOCK
PRODUCT

NEON MICRO ARC | WHITE | HORIZONTAL BENDING | PVC

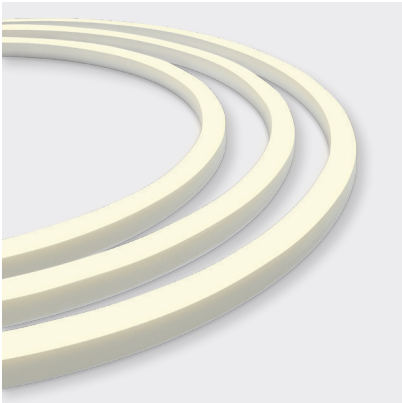

COLOUR	CODE	LUMENS	GRI
NATURAL WHITE 4000K +/- 275K	BL-LS-4850-40-HB	140lm/m	≥80

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%
SOLD BY THE METRE
IES FILES AVAILABLE

With the introduction of our indent range of Silicone encapsulated Neon LED ribbon, our local, end of line PVC stock is available with 3 year warranty using local connectors.

Neon Micro Arc Horizontal bending is a square W10 × H10mm model perfect for cove lighting, or architectural features.


Stock quantities vary - Talk to our team.

For more options consider our indent silicone Neon range - lead times apply.

LED WATTS	4.5W/m	83.3mm	50mm
INPUT VOLTS	24V DC constant voltage	BEND DIRECTION	Horizontal bending
OPERATING TEMP.	-20°C ~ +45°C	DIMENSIONS	W10 × H10mm
MAX. RUN PER POWER FEED	10m using one feed 20m using two feeds (01 & 02 connectors)	INGRESS PROTECTION	IP20 SEE PAGE 2.
		CUTTING LENGTH	83.3mm
		HOUSING	UV & flame resistant white PVC
BEAM ANGLE	160°	MOUNTING	Profile / clips available SEE PAGE 2.
SOURCE LIFE	50,000 hours	CONTROL	Dimmable by PWM signal
WARRANTY	3 years		

APPLICATIONS

- Theatres, bars, restaurants, & retail
- Cove lighting
- Architectural features
- Interior installations

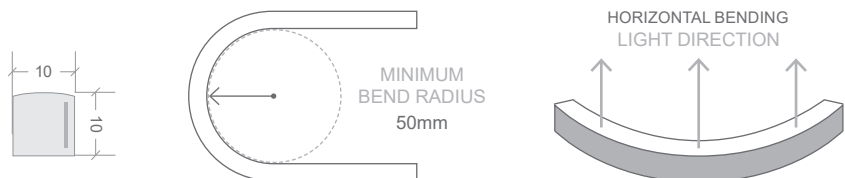


NEON MICRO ARC | WHITE | HORIZONTAL BENDING | PVC | CONNECTIONS

Can be fitted on-site or pre-fitted by Bright Light.

SWIVEL CONNECTIONS | IP20



TOP END FEED CONNECTOR SUPPLIED AS 1M CABLE
 INSTALLATION WITH DOUBLE POWER FEED: FEED 01 + FEED 02

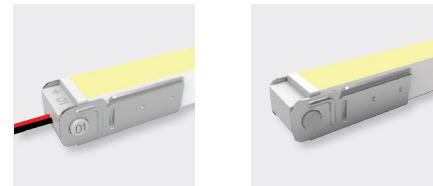

TOP END FEED

END CAP


01 02

WHITE


BL-LS-4851

BL-LS-4852

BL-LS-4854

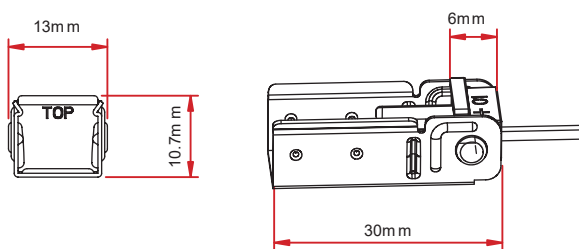


TOP END



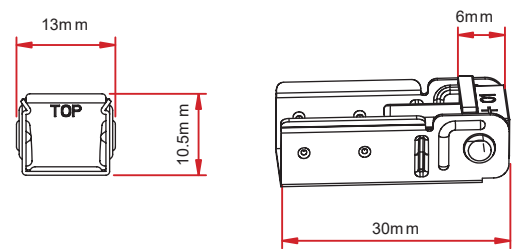


END CAP

NEON MICRO ARC | MOUNTING ACCESSORIES

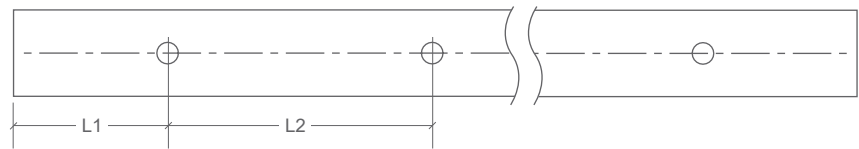

CODE	ACCESSORY	L1	L2	HOLE DIMENSIONS	HOLE NUMBER
BL-LS-4858	PLASTIC AND ALUMINIUM PROFILE 2M	100mm	200mm	Ø3.5mm	10
BL-LS-4855	PLASTIC AND ALUMINIUM MOUNTING CLIP 35MM	17.5mm	-	Ø3.5mm	1



PLASTIC AND ALUMINIUM
 PROFILE 2M / CLIP