



NEON CLASSIC | RGB CHASING | SILICONE


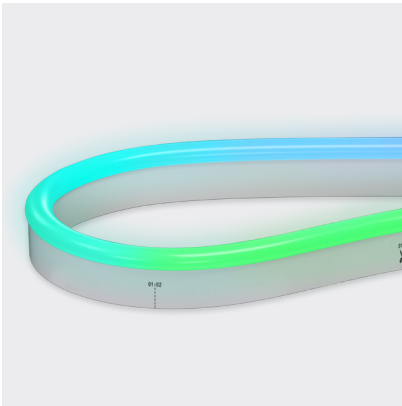


PHOTO CREDIT: VICTOR CARINGAL FROM ARUP

Neon Classic is domed top model measuring W16.5 × H29mm (W11.5mm at the base).

RGB (Red, Green, Blue) ribbon provides a rainbow of colour options from hot pinks to vivid blues and anywhere in-between. RGB Chasing gives you dynamic control, pixel segments are independently addressable allowing chasing & blending movement of colours. Requires controller.

Neon is made to order, check with our team for lead times.

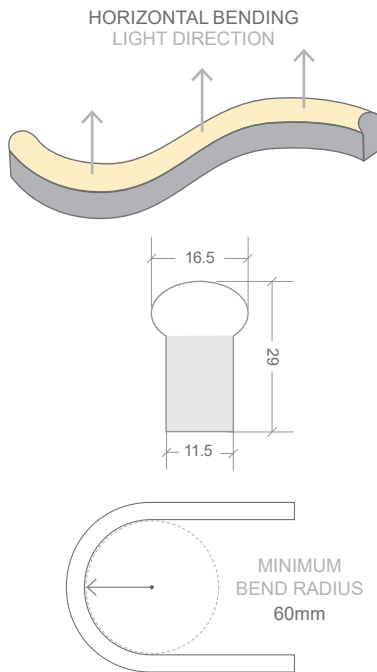

CODE	COLOUR	LUMENS
BL-LS-4700S-RGBC	R 615–625nm	≥60lm/m
	G 520–530nm	≥150lm/m
	B 465–475nm	≥30lm/m

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%. SOLD BY THE METRE. IES FILES AVAILABLE. WHITE, TUNEABLE WHITE & RGBW CHASING OPTIONS AVAILABLE.

POWER & TEMP		PHYSICAL PARAMETERS & CONTROL	
LED WATTS	12W/m	MINIMUM BEND RADIUS	60mm
INPUT VOLTS	24V DC Constant voltage <i>Onboard constant current</i>	BEND DIRECTION	Horizontal bending
OPERATING TEMP. (ENVIRONMENT)	-40°C ~ +55°C	DIMENSIONS	W16.5 × H29mm (W11.5mm at the base)
MAX. RUN PER POWER FEED	Static full loading* 10m using one feed 20m using two feeds Dynamic operating* 15m using one feed 30m using two feeds	INGRESS PROTECTION	IP67 or IP68 Protection established by use of connectors. <i>Dimensions of connectors shown on installation guide</i> SEE PAGE 2.
LIGHT & LIFE		CUTTING LENGTH	125mm
BEAM ANGLE	180°	HOUSING	UV & flame resistant white silicone with opal diffuser
LED PER METRE	56	MOUNTING	Profile / clips available SEE PAGE 3.
PIXELS PER METRE	8	CONTROL	Requires SPI controller or can be controller by DMX controller via SPI decoder.
SOURCE LIFE	50,000 hours		
WARRANTY	5 years		

*STATIC VS DYNAMIC OPERATING

This product has a maximum wattage of 12W/m which is reached when all colours R+G+B are used simultaneously to create a white tone, with 3 × colour channels using approximately 4W/m each. Using Neon at this maximum load is called Static full loading (all colour channels, all powered continuously).

When R, G or B channels are used individually or blended to make colour mixes eg blue or purple (excluding white tones) the wattage used is below the maximum load and is considered dynamic operating. This also applies when the colours are constantly changing (including if a white tone is created but only used in a chasing, flashing or fading capacity).

When the maximum wattage of the product is reached, lengths longer than recommended may experience power loss, reduced luminosity & increased heat which can shorten the life of the product.

If unsure about the products intended usage, future proof by choosing the static full loading lengths.

NEON CLASSIC | RGB CHASING | CONNECTIONS

Neon products are IP rated based on the fitted connections (power feed / end caps).

Bright Light recommend using Slimline injection moulding for the best result, a clean finish and IP68 rating. These are fitted at factory during the production process and can not be altered once produced - **ensure all lengths are double-checked before ordering.**

If on-site cutting is required (due to lengths being unknown in advance or site design alterations), Snap connector fittings can be used instead. Snap Connectors can be fitted on-site and offer an IP67 rating (provided all installation instructions are followed correctly).


Power feed connectors are priced & supplied with 1metre cable as standard. Please specific at time of quoting if alternate lengths are required.

SLIMLINE INJECTION MOULDING CONNECTIONS | IP68

RECOMMENDED



REQUIRES FITTING AT FACTORY.
EXACT LENGTH REQUIRED BEFORE PRODUCTION

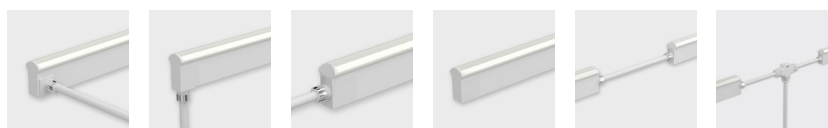

SIDE FEED BOTTOM FEED TOP END FEED END CAP 300MM FLEXIBLE CONNECTOR T FEED

SNAP CONNECTIONS | IP67

ON-SITE FITTING



FITTING ON-SITE - WHERE LENGTHS ARE UNKNOWN IN ADVANCE.
MUST BE FITTED CORRECTLY FOR IP RATING




TOP END FEED END CAP 300MM FLEXIBLE CONNECTOR

01 02 01 02







RGB CHASING

BL-LS-4523 BL-LS-4524 BL-LS-4526 BL-LS-4527 BL-LS-4525

NEON CLASSIC | MOUNTING ACCESSORIES

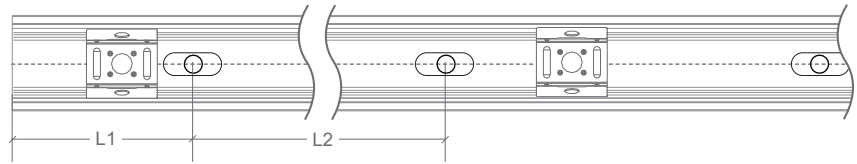


CODE	ACCESSORY	L1	L2	HOLE DIMENSIONS	HOLE NUMBER	CLIP NUMBER
BL-LS-4003	SELF-LOCKING ALUMINIUM PROFILE 2M	100mm	200mm	4 × 10mm	10	9
BL-LS-4004	SELF-LOCKING ALUMINIUM MOUNTING CLIP 35MM	5mm	25mm	4 × 10mm	2	1
BL-LS-4005	PLASTIC PROFILE 2M	100mm	200mm	Ø3.5mm	10	-
BL-LS-4006	PLASTIC PROFILE 1M	100mm	200mm	Ø3.5mm	5	-
BL-LS-4028	BENDABLE STAINLESS STEEL PROFILE 890MM MULTIPLE FIXING LOCATIONS	-	-	-	-	-




**SELF-LOCKING ALUMINIUM
PROFILE 2M / MOUNTING CLIP**

Not recommend for underwater use



PLASTIC PROFILE

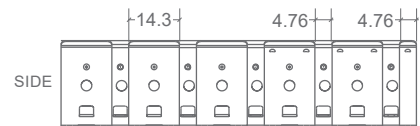

**BENDABLE STAINLESS STEEL
PROFILE 890MM**