




Husqvarna HTC T6


HTC T6 is the second largest model of the grinders with DuratIQ Technology, which stands for operational reliability, precision, control and power. It is a planetary grinder with three grinding discs. The machine features an intuitive digital control panel which gives you continuous feedback and thus control over the grinding process. The completely dustproof, hermetically sealed design of the grinding head and the electrical cabinet protects vital components and extends their lifetime. The well-balanced chassis design makes the HTC T6 floor grinder easy to operate, with superior ergonomics and advanced safety features.

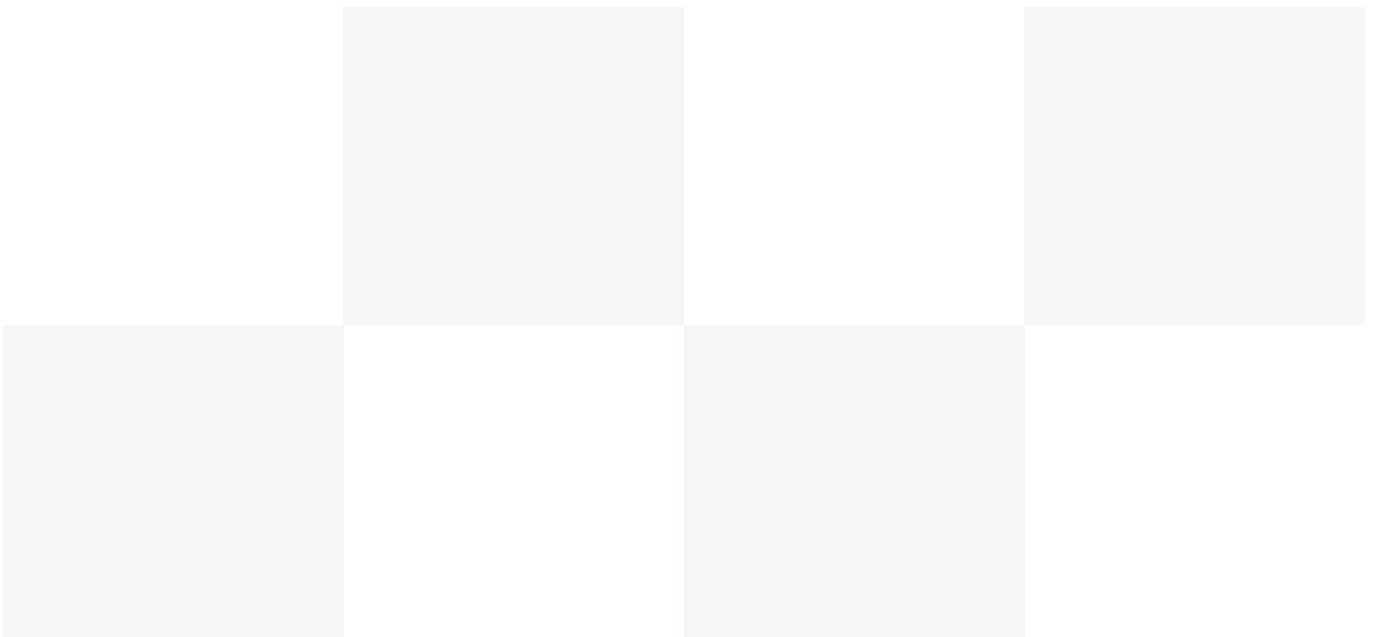

FEATURES

Technical Specifications	
MOTOR	
Output power (As rated by the engine/motor manufacturer)	6 kW
Rated current	50 A
Voltage	220–240 V
Phases	1 ph
Pins	3P+E
Frequency	50–60 Hz
OTHER	
Grinding width	600 mm
Grinding disc diameter	230 mm
Direction of rotation	Both directions
Number of grinding discs	3
DIMENSIONS	
Product size length	1385 mm
Product size width	657 mm
Product size height	1054 mm
Weight (complete product w/o side packed articles)	384 kg
PACKAGING	
Packaging length	1400 mm
Packaging width	900 mm
Packaging height	1470 mm

ACCESSORIES

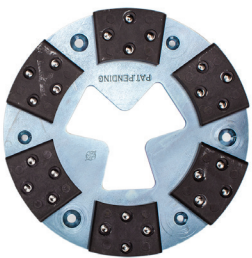

HUSQVARNATOOL HOLDER EZ
230 6
593 31 91-03




HUSQVARNA VELCRO HOLDER
593 31 47-03



HUSQVARNA RESIN HOLDER
593 31 48-02


TOOL HOLDER EZ AIRFLOW
593 31 93-02

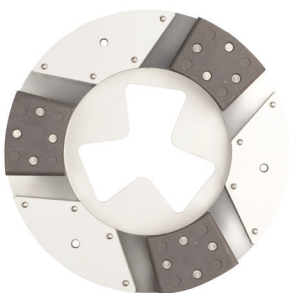

TOOL HOLDER ELASTIC/FLEXIBLE
593 31 92-02



PENETRATION TEST KARSTEN
PIPE TEST KIT
598 85 80-02

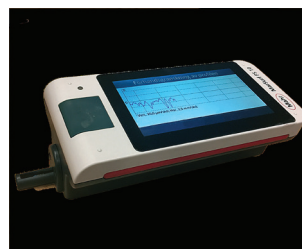

ROUGHNESS TESTER MARSURF
PS10
593 76 86-01



FRICTION TESTER BOT 3000E
531 18 50-01




HARDNESS TEST MOH'S TEST KIT
593 31 69-01



ICRI PROFILE PLASTIC CHIPSET
546 21 69-02



GLOSS & DOI METER RHOPPOINT
IQ
593 31 15-01

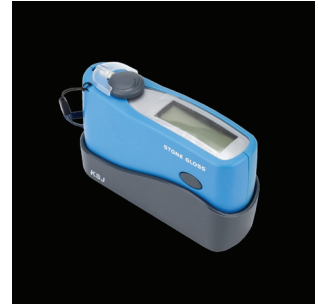

GLOSS METER MG6-SS
593 31 32-01



ICRI PROFILE CONCRETE SET
546 21 69-01