

Technical data sheet for

## FAST FRI TWIN PAN ELECTRIC FRYER 450mm

FN8224EE

---



- 17kW high performance twin pan fryer
- 2 digital display temperature control 4 basket timers
- Easy clean stainless steel open pan with 10 year limited warranty
- 12L per pan oil capacity
- 25mm (1" ) drain valves
- Stainless steel exterior
- Easy service
- Fully modular
- Low back model (FNL) available

### Overall Construction

- Stainless steel pan
- Bull nose welded 1.5mm 304 stainless steel
- Splashback 1.5mm 304 stainless steel
- Side panels 1.2mm 304 stainless steel
- Double skin door with 0.9mm 304 stainless exterior
- Hinge out counterbalanced heating elements
- 25mm (1") drain valves
- 150mm legs in 63mm dia. heavy-duty 1.2mm 304 stainless steel with adjustable feet
- 2 baskets and stainless steel lid supplied standard

### Controls

- Digital display electronic thermostats
- Thermostat range 88-195°C
- 2 programmable basket timers with countdown display and alarms per pan
- Heating and basket drop displays
- Programmable melt cycles
- Fail-safe over-temperature safety cut-outs
- Element tilt switch for heating cut-out on element lift

### Cleaning and Servicing

- Open stainless steel pans with hinge out elements for easy clean
  - Easy clean basket support bar
  - 25mm (1") drain valves for effective draining
  - Easy clean stainless steel exterior
  - Access to all parts from front of unit
-

Technical data sheet for

# FAST FRI TWIN PAN ELECTRIC FRYER 450mm

**Waldorf**  
800 SERIES

## Specifications

### Production rate

31kg/hr

### Pan Size (per pan)

Oil capacity 12L (24lbs shortening)

Width 175mm

Length 380mm

Oil frying depth 95mm

### Baskets

2 chrome plated wire baskets

140mm W x 335mm D x 145mm H

### Elements (per pan)

3 x 2.83kW stainless steel heating elements

### Electrical requirements

17kW, 400-415Vac, 50/60hz, 3P+N+E

L1 23.6A

L2 23.6A

L3 23.6A

### Electrical connection

62mm from RH side, 365mm from rear,

and 440mm from floor

### DIMENSIONS

Width 450mm

Depth 805mm

Height 915mm

Incl. splashback 1130mm

Incl. low back 1085mm

### NET WEIGHT

74kg

### PACKING DATA

0.54m<sup>3</sup>, 116kg

Width 870mm

Depth 495mm

Height 1255mm

### OPTIONS AT EXTRA COST

Waldorf Filtamax filtration system

Extra baskets




Side splash guards

Joining caps

Castors

Plinth mounting

FN8224EE

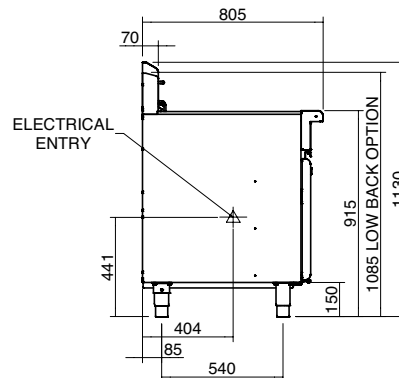

**MOFFAT**

[moffat.com.au](http://moffat.com.au)  
[moffat.co.nz](http://moffat.co.nz)

Australia  
[moffat.com.au](http://moffat.com.au)

### Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

New South Wales  
Telephone +612-8833 4111  
[nswsales@moffat.com.au](mailto:nswsales@moffat.com.au)

South Australia  
Telephone +613-9518 3888  
[vsales@moffat.com.au](mailto:vsales@moffat.com.au)

Queensland  
Telephone +617-3630 8600  
[qldsales@moffat.com.au](mailto:qldsales@moffat.com.au)

Western Australia  
Telephone +618-9413 2400  
[wasaales@moffat.com.au](mailto:wasaales@moffat.com.au)

### New Zealand

[moffat.co.nz](http://moffat.co.nz)

### Moffat Limited

Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)

Auckland  
Telephone +64 9-574 3150  
[sales@moffat.co.nz](mailto:sales@moffat.co.nz)



In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.W8.08/19

an Ali Group Company



The Spirit of Excellence