

Zinc Control Joints #38, #50 and #75

Resists corrosion on applications of plaster and stucco

A solid flange zinc control joint that resists corrosion on interior and exterior applications of plaster and stucco. The #38, #50 & # 75 is used to relieve stresses in large plastered areas of walls, ceilings, and stucco.



This nearly inconspicuous solid wing control joint minimizes cracking and assures proper plaster and stucco thickness. Clean up tape is provided for a neatly finished job.

Various ground sizes are available to facilitate plaster or stucco embedment at the proper thickness.

Product Data & Ordering Information:

Material: .018 99.97% pure Zinc, compliant with ASTM B69
 Also available in G-60 Hot-Dipped Galvanized Steel

Product Code	Ground	Length	Pcs./Ctn.	Ft./Ctn.
ZCJ3	#38 - 3/8"	10'	25	250
ZCJ5	#50 - 1/2"	10'	25	250
ZCJ7	#75 - 3/4"	10'	25	250

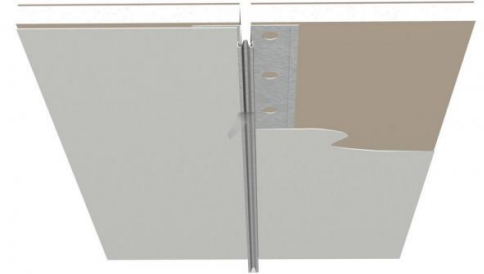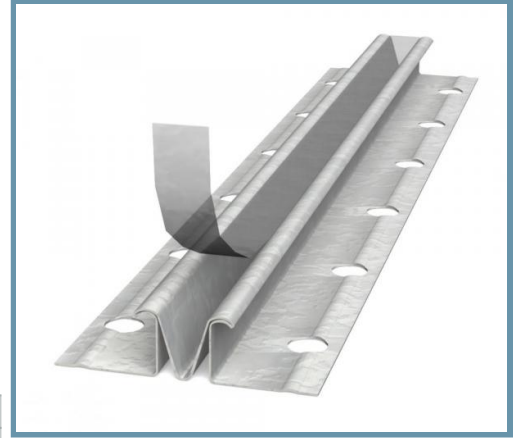

Code Approvals & Performance Standards

- [ASTM B69](#) Standard Specification for Rolled Zinc
- [ASTM C1063](#) Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- [ASTM C1861](#) Standard Specification for Lathing and Furring Accessories, and Fasteners, for Interior and Exterior Portland Cement-Based Plaster
- [SDS Zinc Strip](#) Cold Formed Finished Products

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C1063.