
FORK MOUNTED POLY DRUM HANDLER - FPDL-11-H

APPROX WEIGHT: 166.23 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

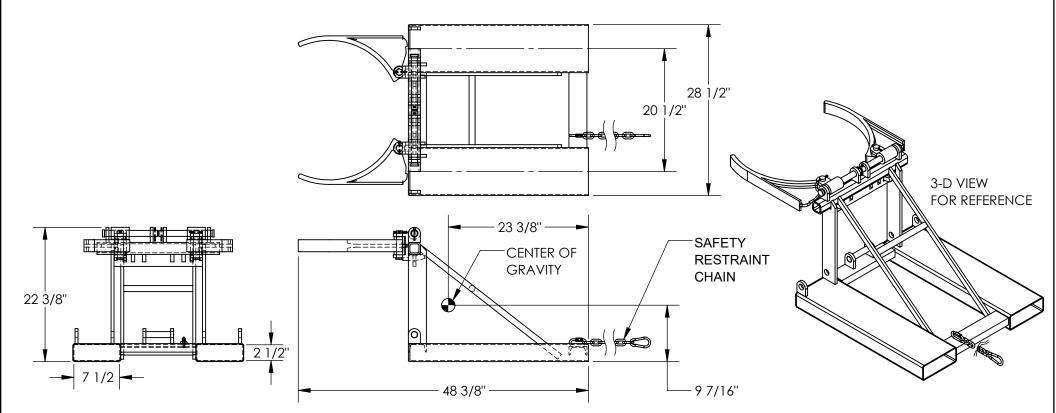

STANDARD FEATURES

- -MODEL NUMBER IS FPDL-11-H
- -CAPACITY IS 1,100 LBS. (ONE DRUM)
- -OVERALL WIDTH IS 28 1/2"
- -OVERALL LENGTH IS 48 3/8'
- -OVERALL HEIGHT IS 22 3/8"
- -TOP GRIP HANDLER FOR USE WITH 30 AND 55 GALLON PLASTIC **CLOSED HEAD DRUMS**
- -TOP LIP MUST BE STRONG ENOUGH TO SUPPORT THE WEIGHT OF THE DRUM
- -FOR USE WITH TOP LIP AT LEAST 3/16" HIGH
- -WILL ALSO WORK WITH STEEL AND FIBER DRUMS
- -INCLUDES SAFETY RESTRAINT CHAIN TO SECURE UNIT TO FORK TRUCK
- -WELDED STEEL CONSTRUCTION
- -TOUGH BAKED IN POWDER COATED BLUE AND YELLOW FINISH
- -USABLE FORK POCKETS ARE 7 1/2" W X 2 1/2" H
- -FORK POCKETS ARE ON 20 1/2" CENTERS
- -LOST LOAD IS 170 LBS (APPROX)
- -EFFECTIVE THICKNESS IS FORK LENGTH MINUS 29 3/4"

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHEMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

SPECIAL FEATURES

NONE

Ρ Ρ R 0

V

Α

ENG.

FAB.

POWER

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

				-
		DISTRIBUTOR'S NAME:		T
FOR INTERNAL USE ONLY		BIOTRIBOTOR OT WAVE.		ľ
PROJECT SIGN OFF		VESTIL MANUFACTURING		V
SALES		VESTIL MAINOLACTORING		
		DRAWN BY: 1.4-0	DATE:	7

W.O.# SALES: X M12 11/21/2017

SCALE: 1:16 FILE NAME: REFERENCE:

QUOTED LEAD TIME: X QUOTE # 40-007-007 Χ