


- LASS-OH! 60110 92734 ◇
- 6 24812 9220 ◇
- ◇= B / GC
- LASS-OH! 60110 93034 ◇
- 6 24812 9320 ◇
- ◇= B / GC
- LASS-OH! 60110 93534 ◇
- 6 24812 9520 ◇
- ◇= B / GC

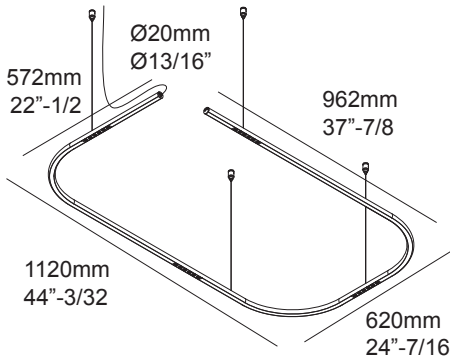

Application

Ceiling surface mounted pendant luminaire
 Installation to a standard j-box with optional coverplate
 For indoor use only

Color Finish

B - BLACK
 GC - GOLD COLORED

Light source

4x DOT.COM S6 MODULES
 Per module, 6x 1W LED

Product description

Powder coated aluminum assembly
 EXCL. 700mA-DC Power supply 34,8V typical voltage
 Class 2 circuits only, current controlled.
 1x Cable 2x18 AWG
 4x Suspension cable 9' long included
 Suitable for damp locations
 Protected against solid objects greater than 12mm ➔ IP20
 Weight: 2,6lbs 1,2kg

Required

OR	Lass-oh! Powerbox 700mA-DC / 25W DIM14	6 24814 00514
OR	LED power supply 700mA-DC / 38W DIM1	6 300 53 ED1
OR	LED power supply 700mA-DC / 35W DIM13	6 300 81 ED13

Accessories


Jiha! S	24814 0020
Jiha! R	24814 0030

Options

Coverplate R 104	6 204 00 104
Coverplate R 103	6 204 99 103

INSTALLATION LUMINAIRE

Accessories

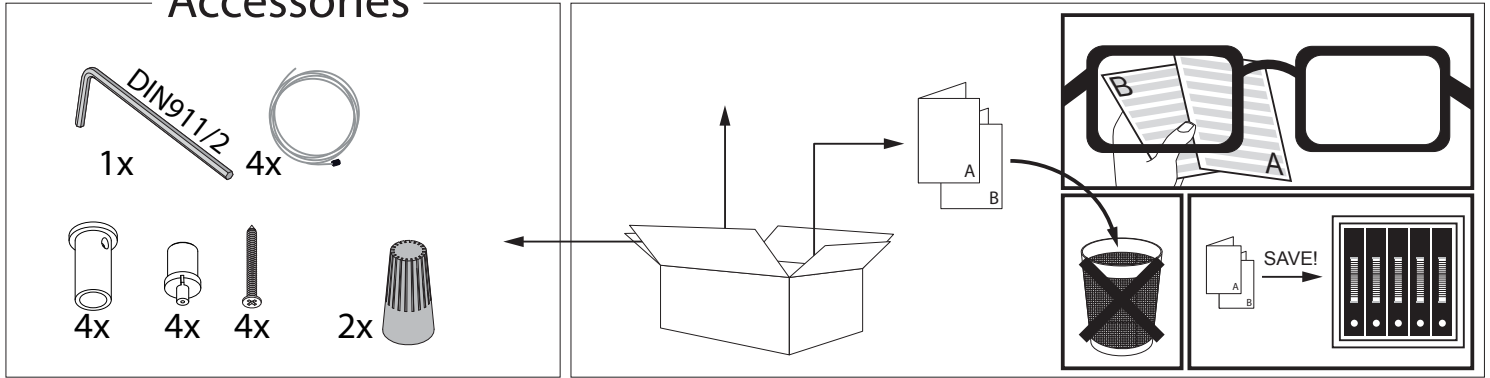

1

TOP VIEW

850mm // 33"-15/32 250mm // 9"-27/32

282mm // 11"-7/64 300mm // 11"-13/16

280mm // 11"-1/32 300mm // 11"-13/16







152mm // 5"-63/64 800mm // 31"-1/2

OPTIONS

Coverplate R 104
6 204 00 104


Coverplate S 103
6 204 99 103

Lass-oh! powerbox 700mA-DC
6 24814 00514

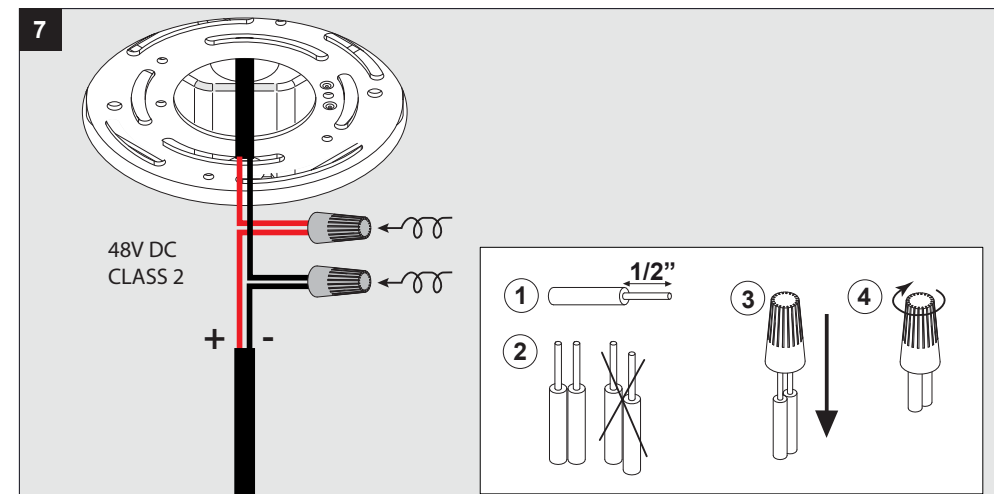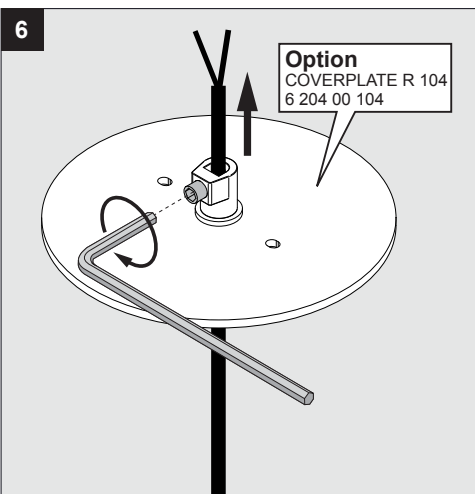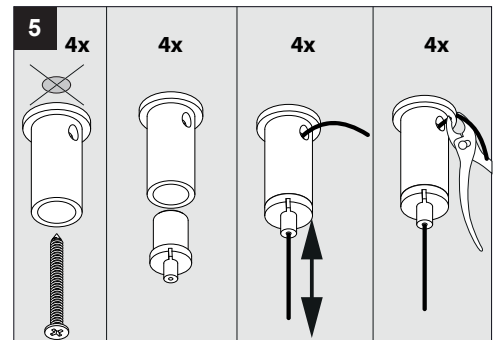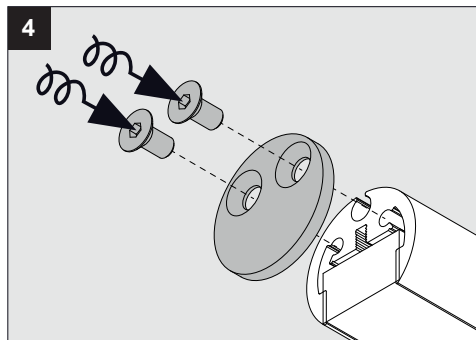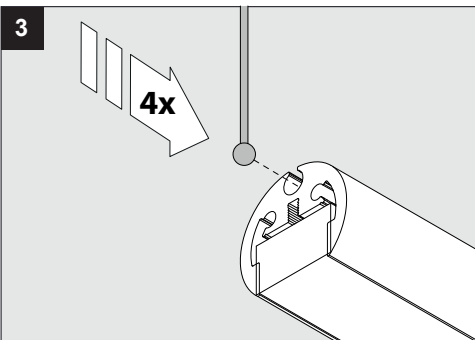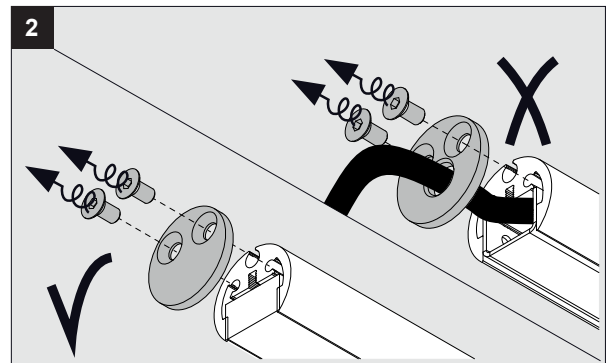



INSTALLATION LUMINAIRE

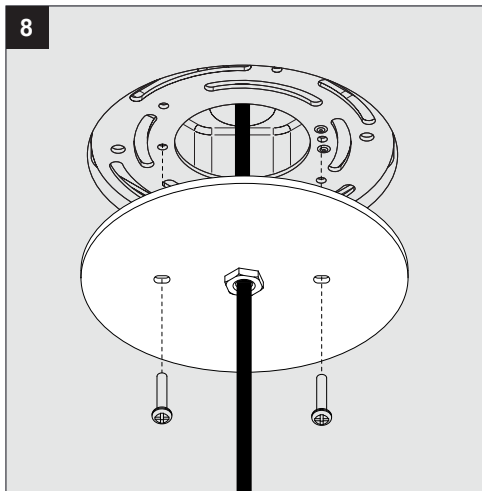

De verlichtingsbron van dit verlichtingstoestel zal enkel door de fabrikant of door de fabrikant aangestelde installateur vervangen worden.


La source lumière de cet appareil ne sera remplacée que par l'entreprise ou par un agent reconnu.

Das enthaltene Leuchtmittel sollte nur durch entsprechendes Fachpersonal ersetzt werden.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent.

La fuente de iluminación que tiene esta luminaria sólo puede remplazarse por el fabricante o por un instalador autorizado.

La sorgente luminosa incorporata in questo apparecchio può essere sostituita solo dal produttore, da un suo centro assistenza oppure da una persona in possesso della necessaria abilitazione.

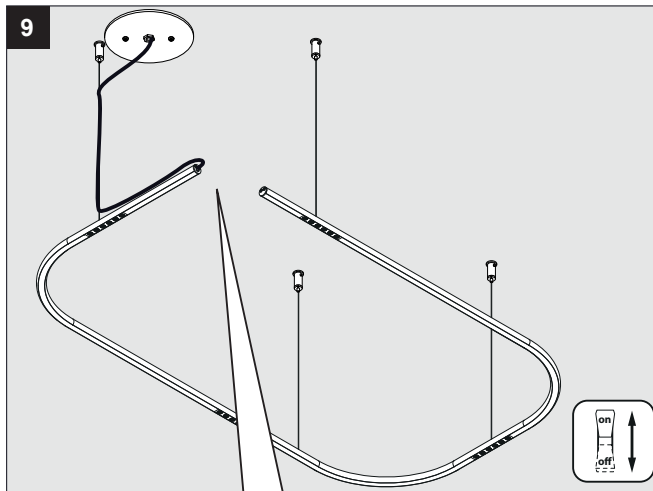

3"
75 mm

3"
75 mm

WARNING!
The weight of the luminaire must be suspended by the steel cables, not by the power cord.

ATTENTION!
Le poids du luminaire doit être suspendu par les cables en acier, le cable électrique ne peut pas suspendre le luminaire.