GENERATION LIGHTING

CEILING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


SAVE THESE INSTRUCTIONS!

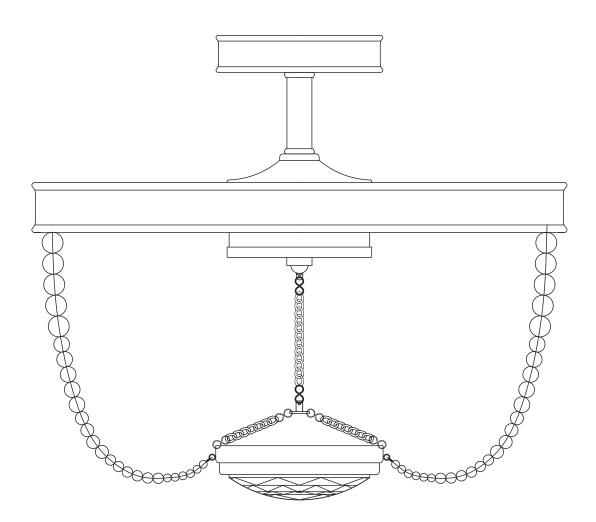

GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.generationlighting.com

Install the Fixture

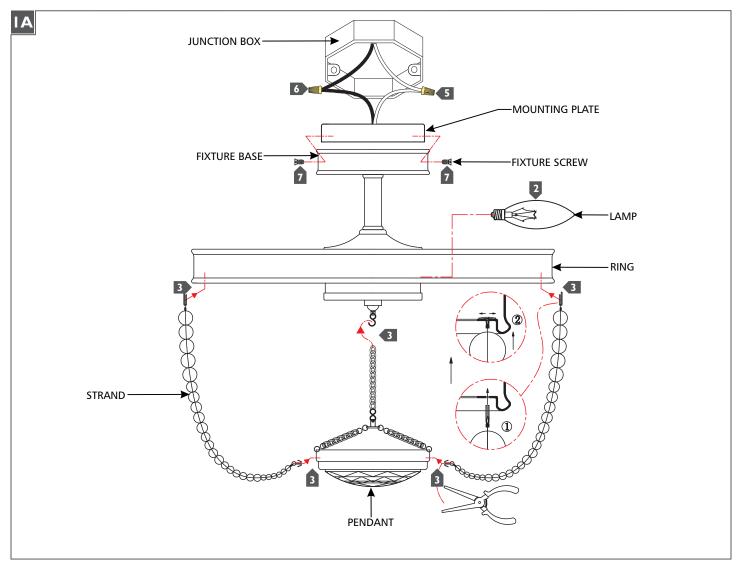

- Secure the mounting plate to the junction box.
- 2 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- Install the pendant to the bottom of the ring assembly, then attach one end of a strand to the pendant and the other end to the ring as shown using pliers (not provided). Repeat as necessary. Note: Pliers only necessary where shown.
- 4 Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.