


Campana



Pendant Luminaires | 220-240 V
1 topLED 28 W DC - 31 W AC | CRI 90
9300

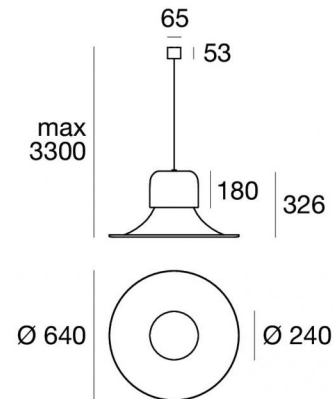

Technical data	
Construction year	2021
Type	Pendant Luminaires
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Total Power	31 W
Source lumens	3234 lm
Rated efficiency	240 - Array AC
Frequency	50 - 60 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	DALI-2 - PUSH DIM
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	3 m
Resin potting	No
Type of light emission	Single emission
Net weight	3.600 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing

Material	Aluminium
Processing	Coating

Finishing diffuser

Material	PMMA
Colour	opaline

Finishing mounting frame

Material	metal
Processing	Coating



Pendant Luminaires | 220-240 V | 1 topLED 28 W DC - 31 W AC | CRI 90 | Base 9300


Single emission pendant luminaires for indoor application. The super warm LED light source with a general lighting light distribution is composed of 1 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 3234 lm, with a 115.5 lm/W nominal luminous efficacy.

The device body is made of aluminium, processed by means of coating; the diffuser is made of pmma; the mounting frame is made of metal, processed by means of coating. The ingress protection degree is IP20; the total weight is of 3.600 kg.

The total absorbed power is 31 W. The power supply cable is included and features a 3 m lenght.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

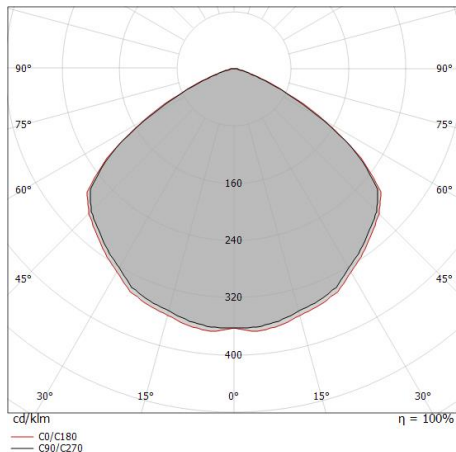

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.55 1.56	E(0°) 2676 E(C90) 57.2° 214 E(C0) 57.3° 216
1.0	3.10 3.12	E(0°) 669 E(C90) 57.2° 54 E(C0) 57.3° 54
1.5	4.66 4.67	E(0°) 297 E(C90) 57.2° 24 E(C0) 57.3° 24
2.0	6.21 6.23	E(0°) 167 E(C90) 57.2° 13 E(C0) 57.3° 14
2.5	7.76 7.79	E(0°) 107 E(C90) 57.2° 9 E(C0) 57.3° 9
3.0	9.31 9.35	E(0°) 74 E(C90) 57.2° 6 E(C0) 57.3° 6

— C0/C180 (Half-peak divergence: 114.6°)
— C90/C270 (Half-peak divergence: 114.4°)

Energy efficiency class

This product contains a light source of energy efficiency class F.

Illuminotechnical Features

Light Output Ratio (LOR)	57 %
Source lumens	3234 lm
Delivered lumens	1848 lm
Consumption	31 W
Luminaire efficacy	59 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80

Standard Operating Ambient Temperature 25°C

LED Life / Failure Ratio

L70 B20 C0 72500h

UGR

UGR axial	25.3
UGR transversal	25.4
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Light distribution simmetry	Symmetrical
C0/C180 optics	114°