

Jake Linear Chandelier

LC1128 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com


© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

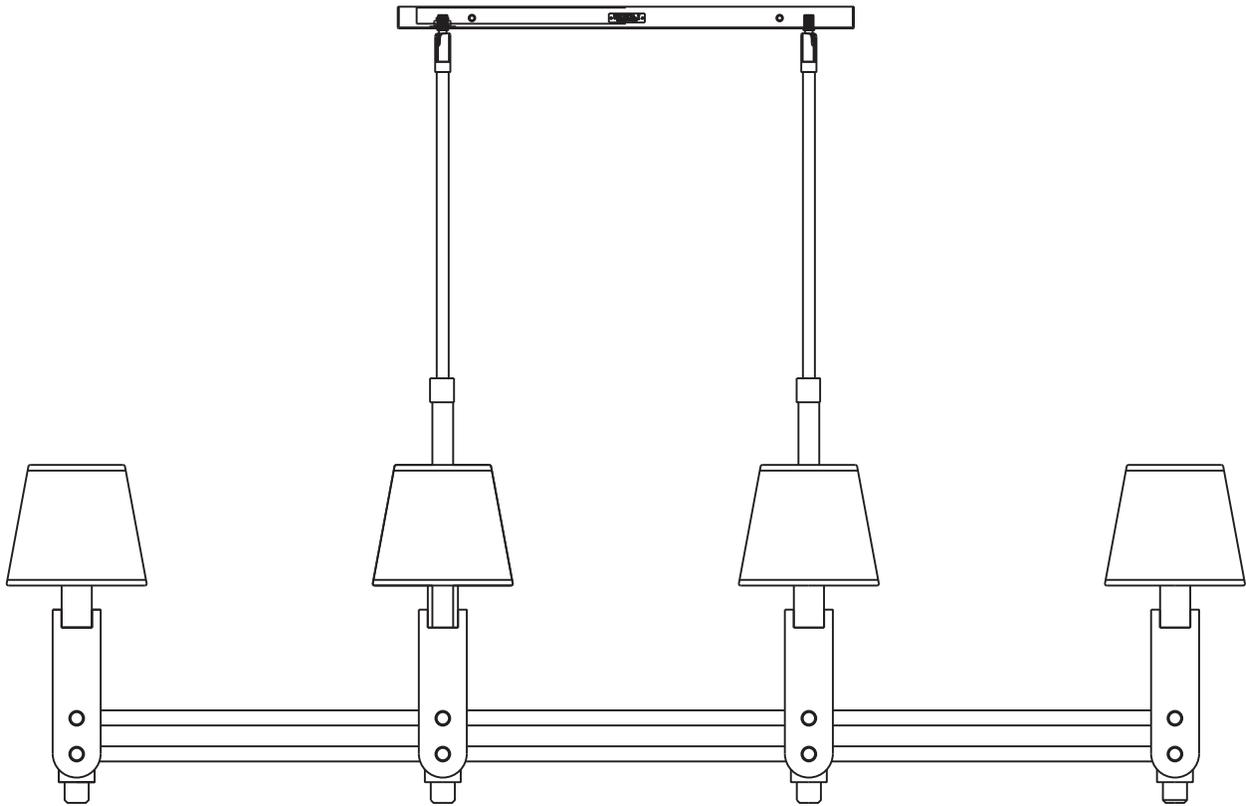

SAVE THESE INSTRUCTIONS!

Install the Fixture

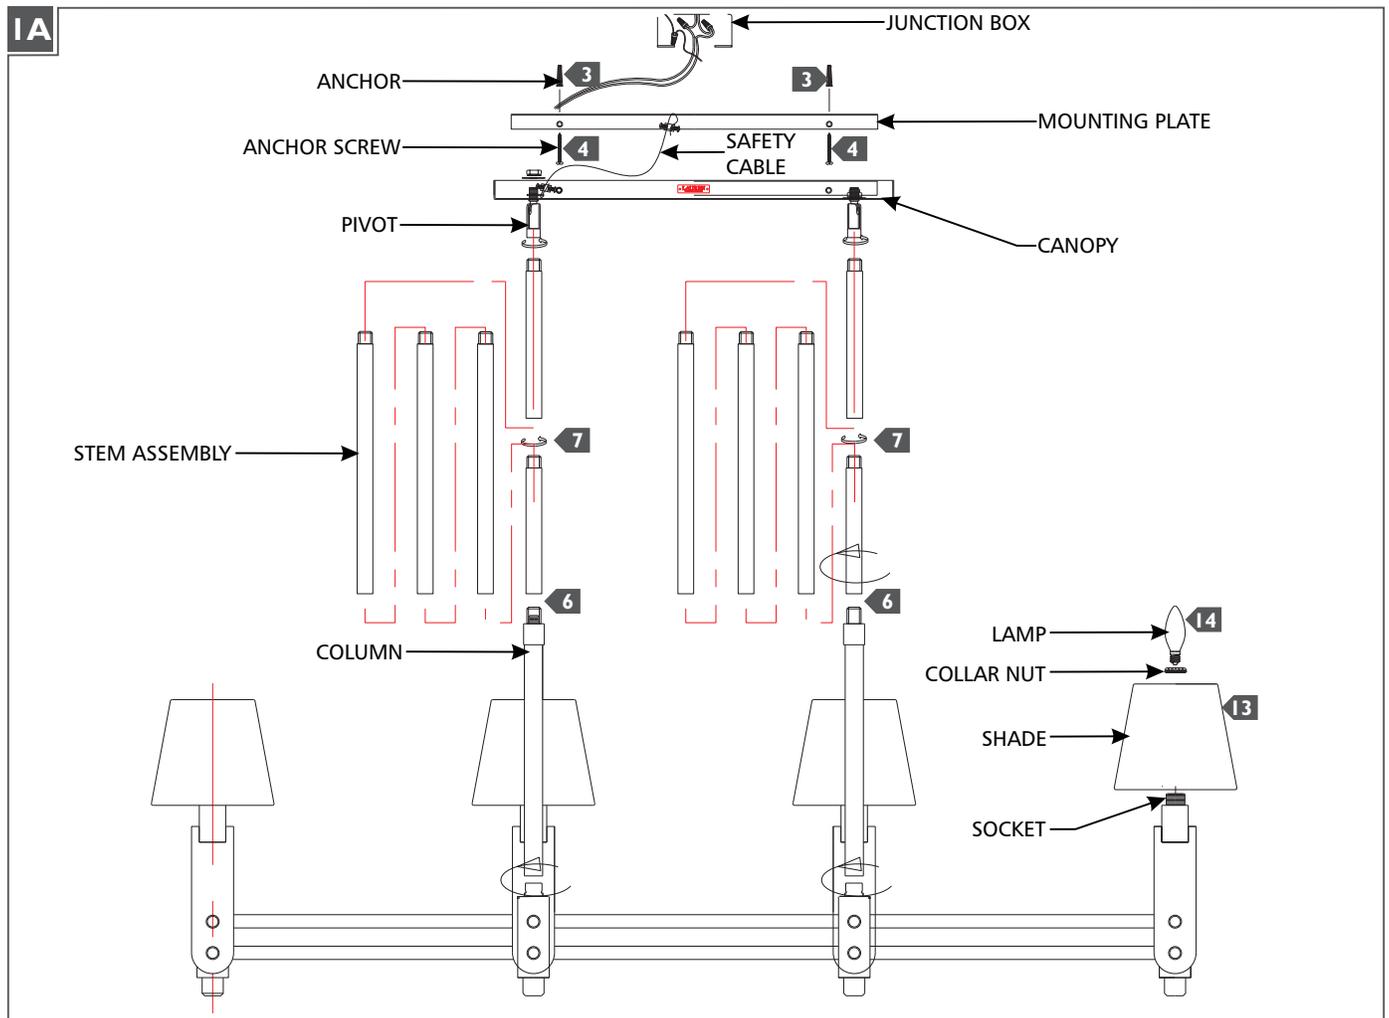

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor locations through the holes on the mounting plate, then remove the mounting plate.
- 3** Install the anchors to the marked points.
- 4** Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 5** Determine the wanted height or look of the fixture with the provided stems and pivots, then assemble them by screwing them together.
- 6** Feed the fixture wires through the column, then screw the columns onto the fixture.
- 7** Feed the fixture wires through the stem assembly, then screw the stem assemblies onto the columns.
- 8** Feed the cords through the canopy, safety cable, washers, and hex nuts, then place them onto the pivots and secure them together with the hex nuts.
- 9** Pull the power line wires out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Install the shade by placing it over the socket and screwing the collar nut onto the socket to secure in place. Repeat for remaining shades.
- 14** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.