


estelan

Category 6A U/UTP Patch Cord

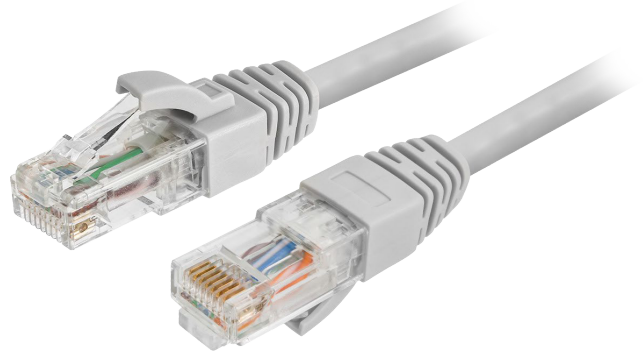

High Speed 10 Gigabit U/UTP Patch Cable LSZH, Category 6A delivers optimal transmission and networking performance with reduced insertion loss and Alien Crosstalk. These are high-performance components available in a variety of lengths and colors, designed to meet or exceed Cat6A specifications. 24 AWG conductors are securely crimped with RJ45 plug to deliver superior performance.

Features & Benefits

- 24 AWG Stranded flexible cable
- High performance RJ-45 Connectors with 50µm Gold Plated contacts
- Flexible Strain Relief Boot
- Soft latch-cover design for ease of handling
- Complies to ANSI/TIA-568.2-D and Equivalent standards

Regulatory Compliances/Certifications

- RoHS Directive (2011/65/EU+2015/863/EU)
- UL Verified (E325735)
- ETL Verified

Specifications

Mechanical Specifications	
Conductor AWG	24
Conductor Material	Stranded Bare Copper
Type of Cable	U/UTP
Number of Pairs	4
Application	Indoor
Insulation Diameter	1.05 ± 0.05mm
Insulation Material	PE
Jacket Type	LSZH
Cable Diameter	5.9 ± 0.03mm

Environmental Specifications

Installation Temperature	0°C to 50°C
Storage Temperature	-20°C to + 70°C
Operating Temperature	-10°C to + 60°C

Ordering Information

Part Code	Description
NXPCC6AUXZ24GY03	Category 6A High Speed 10Gigabit 24AWG U/UTP Patch Cord, LSZH, Grey, 3 Meters

Configurator

	Type	Category	Shielding	Outer Sheath	Cond. Size	Color	Length
NX	PC	C6A	UX	Z	24	GY	03
	PC - Patch Cord	C6A-CAT6A	UX - Unshielded	R - CMR	24 - 24AWG	BL - Blue	01 - 1 Meter
				P - CMP	26 - 26AWG	OR - Orange	99 - 99 Meters
				Z - LSZH	28 - 28AWG	GR - Green	
				X - CMX		GY - Grey	
						WH - White	
						RD - Red	
						BK - Black	
						YL - Yellow	

01/042023

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only and is believed to be reliable. However, Sterlite Technologies makes no warranties to its accuracy or completeness and disclaims any liability in connection with its use. Sterlite Technologies obligations shall be only set forth in Sterlite Technologies standard terms and conditions of the sale and in no case, Sterlite Technologies be liable for any incidental, indirect or consequential damages arising out of sale, resale, use or misuse of the product.

Users of Sterlite Technologies products should make their own evaluation to determine the suitability of such each product for the specific application.