





MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	

PRODUCT FEATURES:

- LUMILEDS LED, high luminous efficiency and long working life.
- ❖ High efficiency LED Driver, the wide range input voltage AC120-277V;
- ❖ Magnesium alloy design, better cooling, light quality, LED Tj < 85 °C.
- Optical design, greatly improved the light utilization and evenness

Additional Information:

o Power: 200W

Input: AC 120-277V

o CCT: 5000K

o Output: 27200 LM

o Light Source: LUMILEDS

o Driver: SOSEN POWER

Structure Features:

Shell Material: Magnesium Alloy


Color: BlackWeight: 13 lbs.






PRODUCT APPLICATIONS:

The 1000LED UFO High Bay LED Lighting Series can be widely used in Warehouses, Industrial Areas, Gymnasiums, Stadiums, Exhibition Halls, Workshops, Manufacturing Facilities, Distribution Centers, Storage Areas, Grocery Stores, High Bay Garages and Big Box Retailers

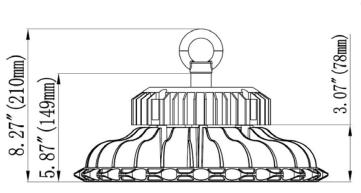







UFO LED HIGH BAY LIGHT

TECHNICAL PARAMETERS:

Туре	1L-UHB20W27-XXK-AL-M					
Power	200W	Lighting Angle	80°			
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs			
PF	>0.95	Working Life	>100000 hrs			
Driver Efficiency	>90%	Working Temperature	-30 - +45℃			
Luminous Flux	27200 Lm	Storage Temperature	-40 -+80℃			
Color Temperature	3000K/4000K/5000K/5700K	Protection Level	Wet Location/IP65			
CRI	Ra>80	Cable	3 core, 18AWG (0.5m)			

IRRADIATION AREA: (80 degree lens)

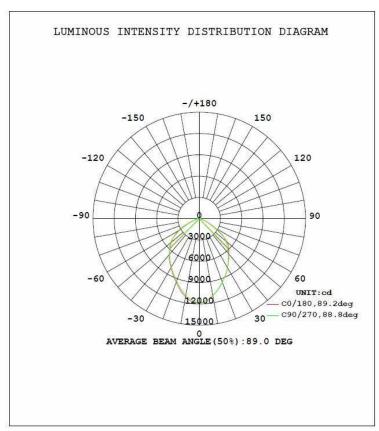

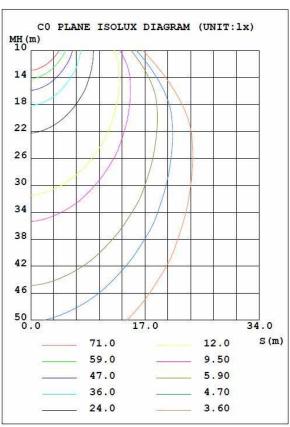



UFO LED HIGH BAY LIGHT

ORDERING INFORMATION:

EXAMPLE: 1L-UHB 20W 27-50K-AL-M

1L	СР	20W	27	50K	AL	М
Company	Product	Power	Voltage	ColorTemp	Parts	Control
1000LED	UHB UFO High Bay Light	10W(100W) 15W(150W) 20W(200W)	27 AC120-277V	30K (3000K) 40K (4000K) 50K (5000K) 57K (5700K) ± 500K	AL Aluminium Iampshade	10V Dimming 1-10V M Motion Sensor

PRODUCT CERTIFICATIONS:



1000LED INC. Email: info@1000LED.com Website: www.1000LED.com Toll-free: (877) 340-1700