

LCUF Firebrick Liner Kit Installation Instructions

Model: FBPREM(T,H)32, FBPREM(T,H)36, FBPREM(T,H)42



WARNING: Turn appliance OFF and allow to cool before servicing. Only a qualified service person should service and repair this insert. A qualified service person must connect and disconnect the insert to/from the gas supply. Follow all local codes.

CAUTION: Always handle firebrick panels with two hands. Do not force the panels into place. Excessive force will break the panels. Always wash hands after handling the firebrick.

NOTE: Firebrick liner kits may be used only with the LCUF vent free fireplace. Please verify the size and model number of your fireplace to be certain the kit you purchased is correct.

KIT CONTENTS:

Part No.	Description	For Use With
FBPREMT32	Premium Firebrick Traditional 32	LCUF32CR-B
FBPREMH32	Premium Firebrick Herringbone 32	LCUF32CR-B
FBPREMT36	Premium Firebrick Traditional 36	LCUF36CR-B
FBPREMH36	Premium Firebrick Herringbone 36	LCUF36CR-B
FBPREMT42	Premium Firebrick Traditional 42	LCUF42CR-B
FBPREMH42	Premium Firebrick Herringbone 42	LCUF42CR-B

- One (1) Center panel
- One (1) Right panel
- One (1) Left panel

TOOLS REQUIRED:

Screwdriver

INSTRUCTIONS:

1. Remove logset and media.
2. Remove existing firebrick if installed by removing bracket at top front of side brick panel. Tilt brick into box and lift out. Repeat for opposite side. NOTE: Retain brick brackets for installation of new panels. See Figure 1.
3. Remove rear refractory panel.
4. Install rear ceramic firebrick panel against the center of the rear wall of the firebox.
5. Install side ceramic firebrick panel against the side of the firebox and slide back into the rear panel. Reinstall brick bracket in same hole location. Repeat for opposite side. See Figure 2.
6. Reinstall logset and media.

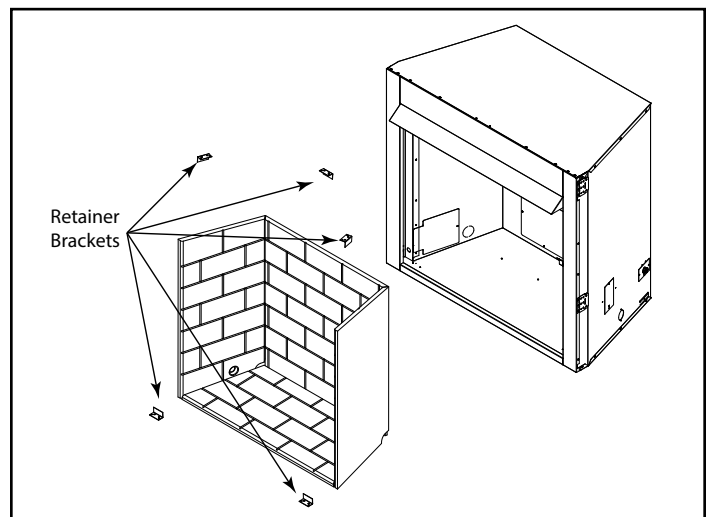


Figure 1

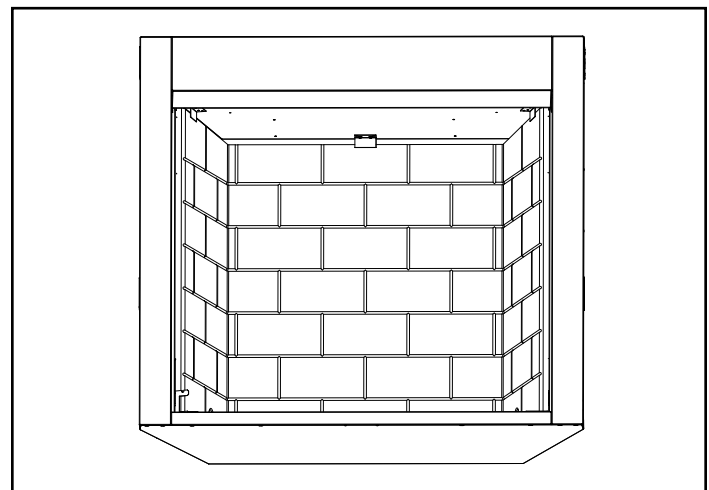


Figure 2

Hearth & Home Technologies
7571 215th Street West, Lakeville, MN 50044
www.hearthnhome.com