



10 OUTLET SURGE PROTECTOR + 2 USB PORTS

Premium quality, fireproof surge protection and USB charger

KEY FEATURES

- 10 Outlets
- 216,000 Amps / 3240 Joules
- Ceramic, Fireproof Surge Protection
- <40 dB Noise Filtering
- Resettable Circuit Breaker
- 2 USB Charging Ports (2.4A)
- Surge Protection and Ground LED Indicator
- 6 ft. Heavy-Duty Power Cable
- Angled Space Saver Plug

FIREPROOF SURGE PROTECTION


Traditional surge suppression products use standard MOV (Metal Oxide Varistor) components. TrickleStar products incorporate advanced surge protection technology. The MOVs are encased in a ceramic casing and are capable of suppressing more energy and dissipating heat faster than traditional MOVs. More importantly the ceramic casing is fireproof and is capable of preventing fire during abnormal surge conditions.

APPLICATION


Suitable for TV / Home Theater setups

PRODUCT WARRANTY

- 10 Year Product Warranty
- \$500,000 Connected Equipment Warranty
- 30 Day Money Back Guarantee
- 10 Year 1 for 1 Replacement If Damaged By An Electrical Surge

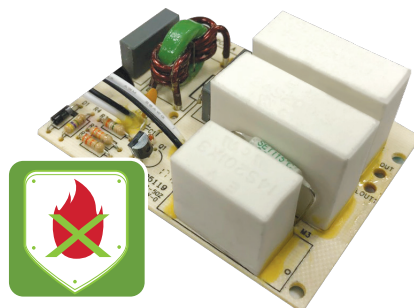

APPLICATION DIAGRAM

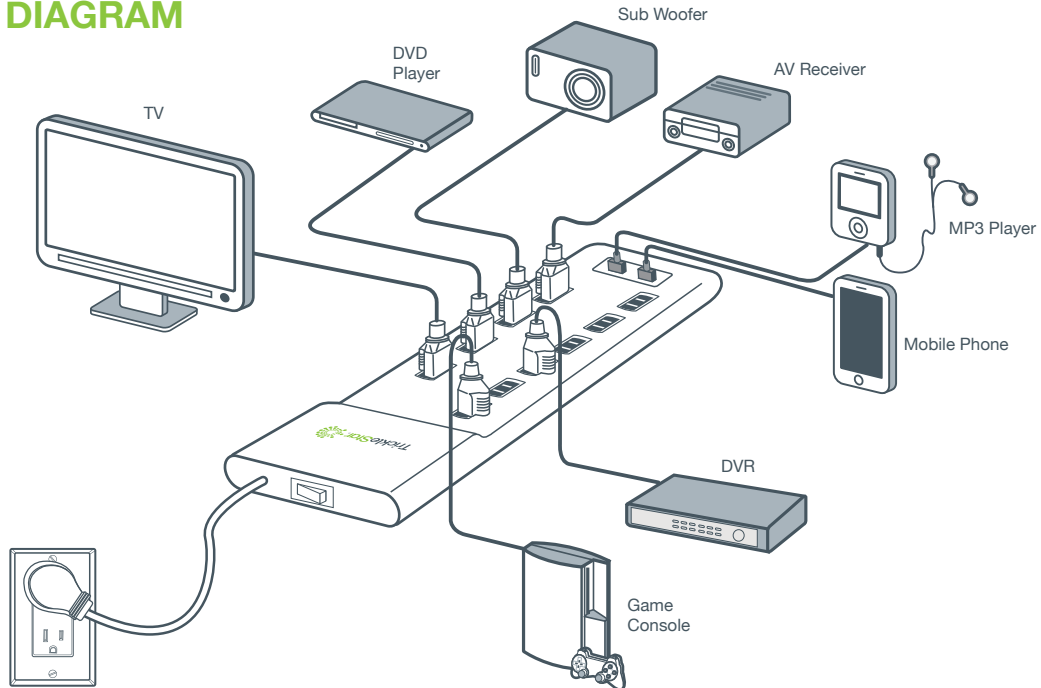

ELECTRICAL SPECIFICATIONS

FOR INDOOR USE

Voltage	120 VAC +/- 10% 60Hz
Power Rating	15A, 1800W
Surge protection	216,000 Amps / 3240 Joules
VPR	L-N 500V, L-G 500V, N-G 500V
Surge Response Time	<1ns
Noise Filtering	<40dB
Standby Power Consumption	<1 Watt
USB Charging Port	5VDC, 2.4A Total
Cord Length	6 ft.

PHYSICAL SPECIFICATIONS

Operating Temperature	32° to 104° F
Storage Temperature	14° to 140° F
Humidity	5 to 90% N/C
IP Rating	IP20

APPROVALS

Conformity to product standards for safety and EMC.

- UL (US & Canada)
 - Relocatable Power Taps, UL 1363, Fifth Edition
 - Standard for Surge Protective Devices, UL 1449, Fourth Edition
- US Department Of Energy (DOE) VI certified

ORDERING INFORMATION

TS1268
182SP-US-10UV-PA6BC

10 Outlet Surge Protector,
2 USB Port (2.4A), 3240J,
6 ft Cord, Black

