
## **MD Pneumatics Equalizer DF Technical Specifications**

MODEL	MAXIMUM RPM	MAX PRESSURE DIFFERENTIAL psi / mbar	MAX VACUUM in. Hg / mbar	MAXIMUM TEMPERATURE RISE °F / °C	MAWP psi / bar	APPROX WEIGHT LBS. / KG
4504	4000	18 / 1241	16 / <i>542</i>	290 / 161	20 / 1379	270 / 122
4506	4000	18 / 1241	16 / 542	265 / 147	20 / 1379	310 / 141
4509	4000	18 / 1241	16 / 542	260 / 144	20 / 1379	350 / 159
4512	4000	15 / 1034	16 / 542	255 / 142	20 / 1379	390 / 177
4604	4000	18 / 1241	16 / 542	290 / 161	20 / 1379	210 / 95
4606	4000	18 / 1241	16 / 542	265 / 147	20 / 1379	245 / 111
4609	4000	18 / 1241	16 / 542	260 / 144	20 / 1379	280 / 127
4612	4000	15 / 1034	16 / 542	255 / 142	20 / 1379	320 / 145
6012	3000	15 / 1034	16 / 542	280 / 156	20 / 1379	590 / 268
6016	3000	15 / 1034	16 / 542	280 / 156	20 / 1379	650 / 295
6024	3000	10 / 690	16 / 542	230 / 128	20 / 1379	775 / 352





## **MD Pneumatics Equalizer DF Dimensions**

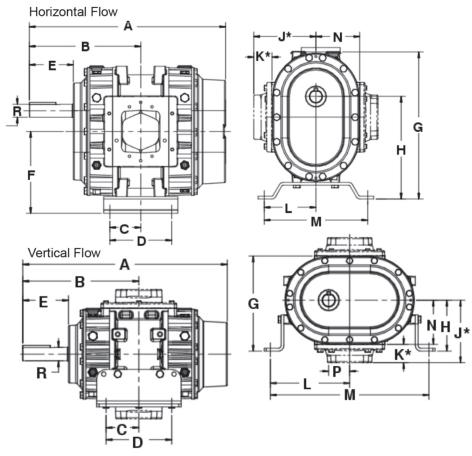

MODEL	NPT	J*	K*	WT. (LBS.) EACH CONNECTOR		
4504	4"	9.02	4.15	11		
4506	4" (short)	6.94	2.03	11		
4506	4" (long)	10.94	6.03	19		
	4" (short)	6.94	2.03	17		
4509	5" (short)	12.47	2.93	15		
	5" (long)	7.84	12.47	28		
4540	6" (short)	7.63	2.72	19		
4512	6" (long)	13.19	8.28	36		

MODEL	SERIES	Α	В	С	D	E	F	G	н	L	М	N	Р	R	WT. (LBS.)
4504	17 46	18.45	10.02	2.44 2.50	4.88 5.00	3.52	9.09	16.34 10.50	11.40 5.63	5.75 8.75	11.50 17.50	4.88	2.30	1.437	270
4506	17 46	21.82	12.39	3.44 3.50	6.88 7.00	4.89	9.09	16.34 10.50	11.40 5.63		11.50 17.50		2.30	1.437	310
4509	17 46	24.80	13.87	3.44 3.50	6.88 7.00	4.89	9.09	16.34 10.50	11.40 5.63		11.50 17.50	4 88	2.30	1.437	350
4512	17 46	27.81	15.38	4.94 5.00	9.88 10.00	4.89	9.09	16.34 10.50			11.50 17.50	4 88	2.30	1.437	390

WWW.PROVAC.COM

## **MD Pneumatics Equalizer DF Features & Benefits**

- higher pressure capability
- true, drop-in replacement capability
- compact design
- bi-directional rotation
- timed with precision helical gears, keyed to the rotor shafts
- rotors with integral shafts
- one piece housing
- flow configuration can be converted from horizontal to vertical

## **Applications**

- carpet cleaning dairy milking compost aeration dust collection
- mobile vacuum waste removal