

# Model SB3M

## Product **PLUS**

- + Excellent weight / functionality ratio
- + Can be used on building site or in workshop
- + Scaffolding attachment
- + Large choice of rolls for all applications

Also available in PLUS version: equipped with 6 standard sets of beading rolls (Nr 3, 4, 5, 22/22, 24 and 26) Ref. SB3M-PLUS

Swaging-beading machines SB, a complete range of machines for building sites and workshops, in manual or electric models

### Application areas

- Insulation
- Tinsmithery
- Air duct manufacturing
- Roofing - zincworks



Ref. SB3M on workbench base




Scaffolding attachment included



## Features SB3M

Capacity Stainless steel / Alu (mm)	0,6 / 0,8
Capacity steel S235JR (mm)	0,8
Rolls Ø (mm)	48
Rolls reaming Ø (mm)	18
Overhang (greatest working depth) with standard stop plate (mm)	70
Scaffolding attachment Ø min-max: 45-49 mm	Included
Workbench base	Included
Weight (kg)	9

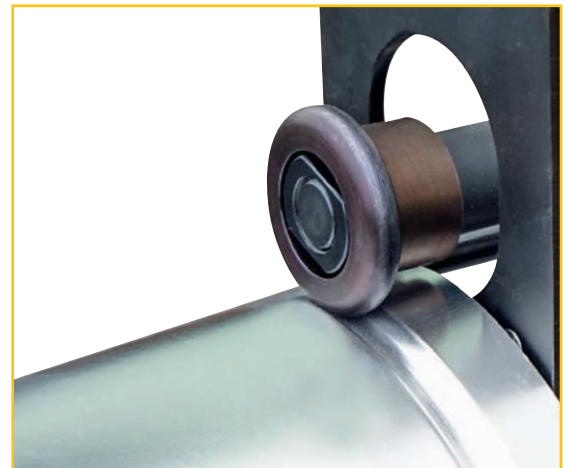

### Standard equipment

- Welded-steel structure and shaft in treated steel
- Open gauge with stop plate in hardened steel
- Synchronous drive of both shafts
- Scaffolding attachment and workbench base included




### Additional equipment

- **Base Ref. SB5-SOCLE** with castors and carrying handles, equipped with 4 storage bins for rolls
- **Sets of rolls**  
See chart below



## Model SB3M

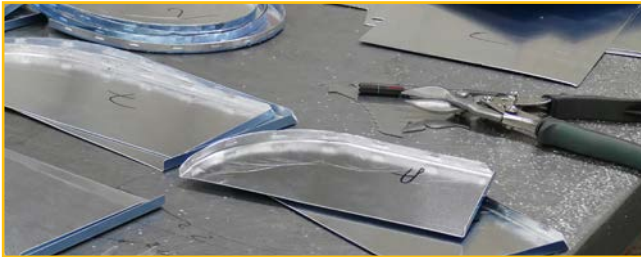

A large selection of rolls to flare, flange, bead, shear or swag





Additional equipment

Sets of Rolls SBMOL available for swaging-beading machine SB3M

**N° 1**

3 mm    5 mm    10 mm    8 mm

**N° 3**    **4**    **5**    **13**

**N° 6**

**N° 7**

**N° 22-22**

**N° 23**

5 mm    7 mm

**N° 24**    **25**

**N° 26**    30 mm

**N° 28**

