



KTEB-1C3032-1-TP-WS

CIRCLINE ELECTRONIC BALLAST



DESCRIPTION

1 x FC12T9 | 120V Input | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid Start
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120Vac ±10%
INPUT FREQUENCY: 60 Hz
POWER FACTOR: Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected


ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC12T9 (32W)	1	120V	34W	0.53A	0.53	1.68	1.00	2.94	150%
FCL30 (30W)	1	120V	27W	0.45A	0.51	1.64	0.95	3.52	150%

WIRING DIAGRAM

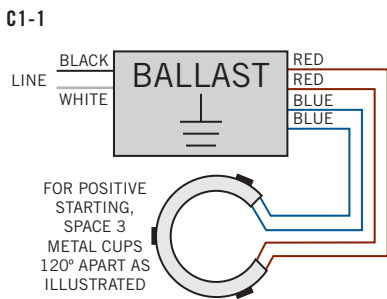

HOT SPOT LOCATION

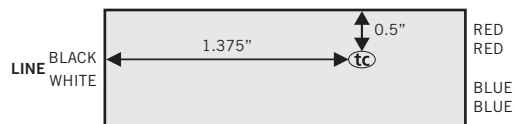



KTEB-1C3032-1-TP-WS

CIRCLINE ELECTRONIC BALLAST

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS

	LENGTH	3.43"
	WIDTH	1.81"
	HEIGHT	1.21"
	MOUNTING	3.00"
	CASE STYLE	S1

STANDARD LEAD LENGTHS*

BLACK	12"
WHITE	12"
BLUE	9"
RED	9"

Lead wires are 18 AWG
105°C/600V, solid copper.

CASE MATERIAL: Steel

*Consult Keystone for special lead length requirements.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-1C3032-1-TP-WS-CP	Carton Pack	80	Active

CATALOG NUMBER BREAKDOWN

KTEB-1C3032-1-TP-WS-CP

KTEB	1	C3032	1	TP	WS	CP
Keystone Technologies Electronic Ballast	No. Circline of Lamps	Wattage Range	120 Input	Thermally Protected	With Circline Sockets	Packaging Style