



COPYRIGHT©2023 JASION. ALL RIGHTS RESERVED.

The manufacturer reserves the right to make changes to the product and manual at any time.  
Visit [www.jasionride.com](http://www.jasionride.com) to download the latest user manual.

# JASION

## User Manual

X-Hunter



# Contents

Home Page .....	01
Product Safety Notice .....	02
Warning Message .....	03
Package Contents .....	05
Product Overview .....	06
Assembly .....	07
Battery Key Positions .....	13
Start-up Procedure .....	15
Remove the Battery .....	16
Charge Your E-Bike .....	17
Display and Setting .....	19
Daily Care and Maintenance .....	22
Troubleshooting .....	27
Specifications .....	28
FAQS .....	29
Limited Warranty .....	30
Contact Us .....	33

## Congratulations on your purchase!

This user manual will help you assemble and operate your new electric bike. Be sure to read all of the information in this manual before riding.

**NOTE TO ALL RIDERS UNDER 18 YEARS OF AGE:** It's very important that you get parental permission before riding your electric bike.





## Product Safety Notice



### Don't Ride Until You Read This:



Always wear a helmet when riding your electric bike.



Keep the two keys properly. If the unique keys are lost, you will not be able to turn on the bike or replace the battery. If necessary, you should get more spare keys (We don't have a backup key).



Make sure your electric bike has a full battery before taking it out to ride.



Always be aware of local road laws, and follow them.



Do not ride the bike under the influence of drugs or alcohol.



Always respect pedestrians.



Do not ride under wet conditions. The electric bike may slide from under your feet causing injury. Wet conditions may damage the electronics and void the warranty.





## Warning Message

1. **Avoid water** - The electric bike is not waterproof. The electronics may be damaged due to water and water damage is not covered by our warranty.
2. **Avoid prolonged exposure** to sun or rain and avoid storage in places with high temperatures or corrosive gas.
3. **Abuse** - We do not cover physical damage due to negligent care and extreme riding.
4. **Whenever you ride** the Jasion Electric Bike, you risk severe injury or even death from loss of control, collisions, and falls. Use caution and ride at your own risk.
5. **Do not modify** the product from the manufacturer's original design.
6. **Do not exceed** the posted speed limit and obey all traffic laws.
7. **Avoid touching** the charging port directly and do not let it make contact with a metal object.
8. **Keep hands and all body parts away** from moving parts while operating the electric bike.
9. **Before riding** - be sure to check the electric bike over and make sure the electric bike is operating correctly before each use.
10. **Before riding** - be sure to check that the braking system is functioning properly; also be sure to check that all safety labels are in place and you understand the safety warnings.
11. **Before riding** - be sure that any and all axle guards, chain guards, or other covers or guards supplied by the manufacturer are in place and in serviceable condition.
12. **Before riding** - be sure to check that the tires are in good condition, inflated properly, and have sufficient tread remaining.
13. **Never exceed** the 480 lbs (218 kg) maximum load rating.
14. **The electric bike should never** be used by children under the age of 18.
15. **Maximum Speed** - Your electric bike goes the maximum speed of 30+ mph.
16. **Make note that additional insurance may be required to** cover situations you encounter while riding an electric bike. It is recommended that you contact an insurance company or broker for advice and consultation.
17. **To conserve electricity**, use assist mode and avoid zero starting, frequent braking, driving against the wind, carrying heavy loads including other people and riding with insufficient air pressure.

18. **Precautions for braking:**Do not brake urgently. When the braking distance is long, first gently pinch the left brake to slow down, and then increase the force when approaching the target, gradually tightening the brake. If the braking distance is short and the speed is fast, the left and right brakes can be pinched together after deceleration.
19. **Gear precautions:**Confirm whether the gear is installed properly before starting. The contact of the gear should not deviate towards one end.
20. **Precautions for Wet Weather:**Do not ride under wet conditions. The electric bike may slide from under your feetcausing injury. Wet conditions may damage the electronics and void the warranty.
21. **Precautions for cycling at night:**Be sure to turn on the front and tail lights when cycling at night.
22. **Guidelines for Road Safety Operations:**Obey traffic rules and do not drive in the wrong direction when driving on the road.





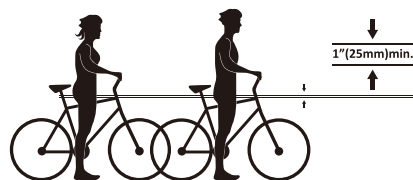





Your Real Inseam to fit this bike should be 25",How to Measure Real inseam ( Inside Leg Length)  
Wearing your regular riding shoes and with your back to the wall, stand with your feet spread so there is about 7 inches between them - this is about the distance apart your feet would be when straddling a bike with your feet on the ground (standover height).

Place a hardcover book against the wall with the spine of the book facing upward. Slide the book upwards towards your groin until it is solidly against your body. This may be a bit awkward, but is way more comfortable -- and safer! -- than trying to ride a bike that is too big.If you have a buddy helping you, get them to measure from the floor to the top of the book spine while you hold the book in place. If you're going it alone, carefully hold the book in place and measure from the ground to the top of the book spine.




## Package Contents

Carefully check package contents, if anything is missing or damaged, please contact Jasion customer service for support: [support@jasionride.com](mailto:support@jasionride.com)

 <p>2xPedals</p>	 <p>1xFront Wheel Screw</p>	 <p>1xFront Wheel</p>	 <p>1xSeat</p>
 <p>1xScrewdriver 2xWrenchs 6xAllen Key Wrenchs</p>	 <p>2xKeys</p>	 <p>1xCharger</p>	 <p>1xFront Fender</p>
 <p>1xELECTRIC BIKE</p>		 <p>1xUser Manual</p>	



## Product Overview

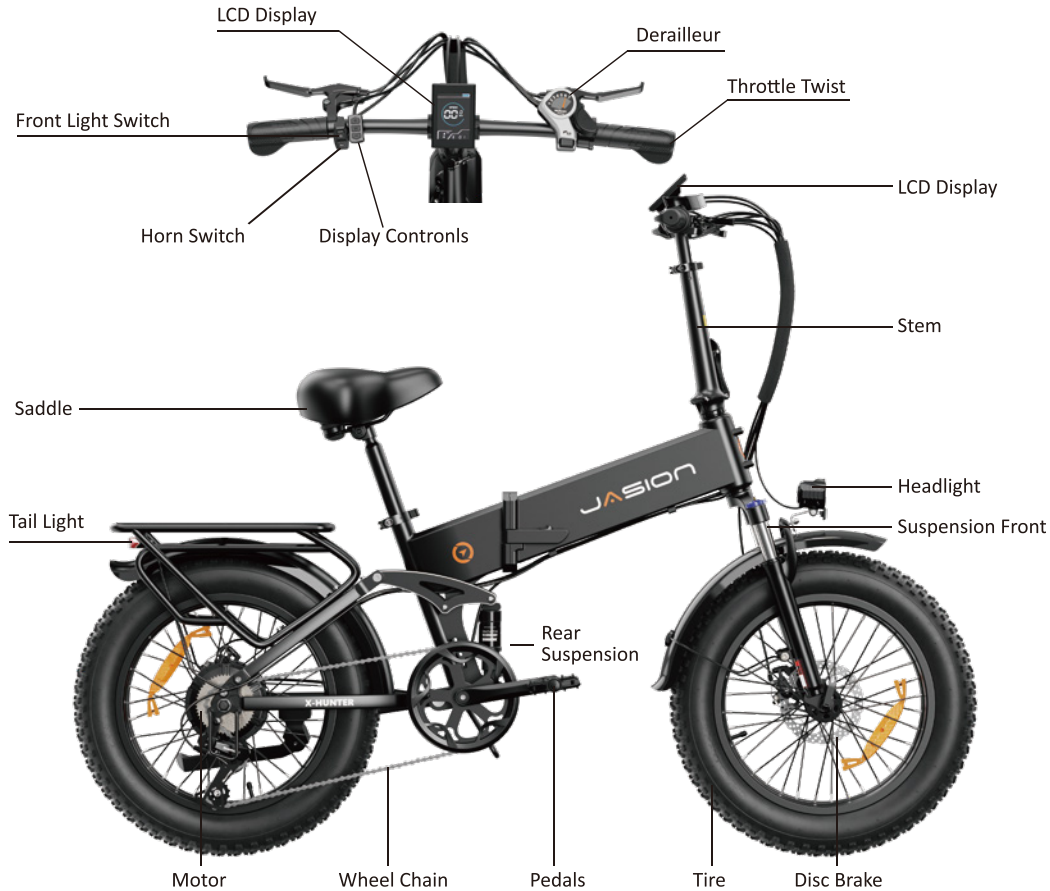

06



## Assembly

1



1. Insert the handlebar into the stem.

2



2. Lock the quick release lever.

3



3. Unfold the stem.

4



4. Lock the folder.

07

# Assembly

Visit [www.jasionride.com](http://www.jasionride.com) for additional help with assembly, including a step-by-step video walk-through

1



1. Remove the protective device before assembling the front wheel.

2



2. Line up the fork with the axle at the center of the wheel. Make sure there's a spacer between the fork and wheel on each side. The disc brake is on the left.

3



3. Hold the nut on one side and tighten the nut on the other side of the wheel onto the fork.

4



4. Ensure the front wheel and quick release lever are properly secured before moving on to the next step.

**Note:** Closing the quick release lever should require enough pressure that it leaves an imprint in your hand. If it's too easy or too difficult to close, adjust the lever tension by turning the adjustment nut opposite the quick release lever.

# Assembly

1



1. Take out the fender, remove the nut, washers, and bolt at the top and bottom of the front fork.

2



2. Hold the front fender and the headlight onto the bike frame and tighten them with the screw.

3



3. Tighten the screw on the right/left side

4



4. Connect the headlight cable. Please note to connect it aim at the direction of the arrow.



## Assembly

For better pedaling, safety and overall riding comfort, positioning the seat at the right height is important. The rider's leg length is used to determine the seat's position. When you pedal, your hips should remain level and your legs should be almost fully extended at the bottom of the pedal stroke, but not over-extended.

To determine the right seat height, sit on the E-bike with one pedal at its lowest point and place the ball of your foot on the pedal. Your leg should be almost fully extended(not lockedout) with a slight bend at the knee.



1. Open the quick release lever by swinging the lever open and outward fully.



2. Move the seat up and down by sliding the seat post in or out of the seat tube. DO NOT raise the seat post beyond the minimum insertion marking etched into the seat post tube.



3. Adjust the seat and the head of the seat is parallel with the top tube.




4. Close the quick release lever using your palm or finger.



## Assembly

- (1) NOTICE: Ensure the seat post and seat are properly adjusted before riding. DO NOT raise the seat post beyond the minimum insertion marking etched into the seat post tube (as shown at right). If the seat post projects from the frame beyond these markings (shown far right), the seat post or frame may break, which could cause a rider to lose control and fall. Ensure the minimum insertion markings on the seat post are inside the seat tube of the frame.

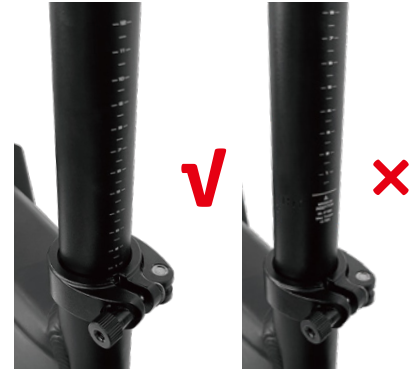

- (2) Before using the bike, always check to ensure all latches, levers, and quick-release are properly secured and undamaged. Check that they are correctly secured before every ride and after every time the bike is left unsupervised, even for a short time. Otherwise, the handlebar stem and/or seat post may come loose and can result in loss of control, damage to the bike, property, serious injury, and/or death.



## Assembly

### Adjusting the Suspension Fork

The suspension fork can move up and down up to 80mm to cushion bumps in the riding surface, which can make riding on a rough road or trail smoother and more comfortable. Depending on a rider's preference, the suspension fork can be locked out as a rigid fork, which will typically yield higher efficiency while pedaling.


**The lockout lever (1)**, located on top of the right side of the suspension fork, can be turned counterclockwise until it stops to completely lock out the suspension fork's travel. To unlock the lockout lever, turn the knob clockwise until it stops. When the lockout lever is unlocked, resistance can be adjusted by turning.



## Battery Key Positions

Before setting out on your ride, familiarize yourself with the key ports and crucial positions. The diagram below illustrates three vital key ports:

Key Position/Icon	Directions
1	ON, Locked to Frame
2	OFF, Locked to Frame
3	OFF, Unlocked from Frame (for battery removal)

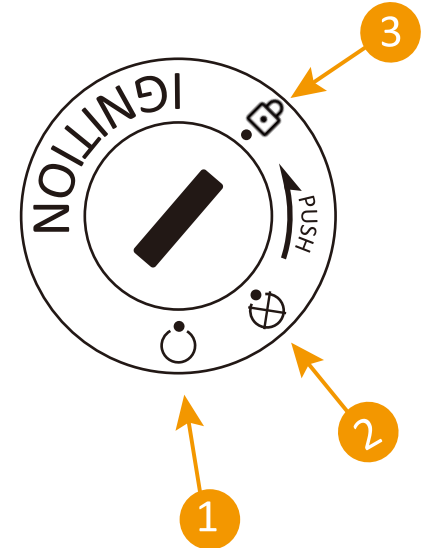

- With the battery in key position 1, the power button on the display screen will activate and deactivate the bike. However, the battery and key cannot be removed.
- If the battery is in key position 2, no buttons or controls can be activated, the bike remains off, and the key can be withdrawn, but the battery cannot be removed.
- If the battery is in key position 3, both the key and battery can be removed before moving or riding the bike.





## Battery Key Positions

1



On the right side of the e-bike, insert the key into the lock hole, now the e-bike is off.

2




Turn the key to the right, being mindful that the circled part will pop out. Now, you're ready to start the e-bike.



## Start-up procedure

After the bike has been properly assembled according to the assembly video, all components are secured correctly, a certified, reputable mechanic has checked the assembly, and you have read this entire manual, turn on the bike and select a pedal assist level following the steps below:

1. Test the battery lock security. Ensure the key port is aligned with the 1 position, which indicating the battery is on and locked onto the frame mount.
2. Ensure proper handlebar and seat adjustment. Note that lowering the seat so the rider can put one or both feet flat on the ground without dismounting from the seat may offer a safer and more comfortable introduction to operating the bike. Ensure the handlebar faceplate bolts and seat post quick-release are fully and properly secured.
3. Turn on the bike. With the battery locked in place. Locate the LCD display controls (near the left handlebar grip). Hold down  for approximately 1 seconds until power is delivered to the LCD display and turn on.
4. Turn on the headlight or taillight if needed or desired. Long press + button (1 second), the brightness of the backlight of LCD Display will decrease. Long press + button again (1 second), the backlight of LCD Display returns to it's original brightness.
5. Select the desired level of pedal assistance (PAS) between level 0~5 using the + and - on the LCD display. Level 1 corresponds to the lowest level of pedal assistance, and level 5 corresponds to the highest level of pedal assistance. Level 0 indicates pedal assistance is inactive. Start in PAS level 0 or 1 and adjust from there.
6. Begin riding carefully. With the proper safety gear and rider knowledge, you may now operate your bike. On a flat surface, in a low gear (1 or 2), most riders should be able to begin pedaling the bike with pedal assist level 0 or 1. You may also use the throttle to accelerate and maintain your desired speed.
7. The throttle is used by slowly and carefully rotating the throttle backward toward the rider. Do not use the throttle unless you are on the bike.



Do not use the throttle while dismounted. Avoid accidental application of the throttle while dismounted; anytime you are moving the bike while dismounted, ensure the bike is powered off to prevent accidental application of the throttle.



## Remove the battery

### Removing and Installing Your Jasion E-Bike Battery.

For your convenience, the Jasion battery is designed to be removable. Follow these steps to effortlessly take out and reinstall your battery:



1 Open the frame quick-release lever and fold the bicycle.



2 On the right side of the e-bike, press the key inward and simultaneously rotate it to the left until the button recesses.



3 Withdraw the key and carefully pull the battery out from the frame.

Reinstall the battery:

1. Align the groove on the bottom of the battery and gently insert it into the frame.
2. Turn the key to the locked position and your bike is ready to go.

There is a detailed video on the product page and if you need any assistance you can contact our support team at [support@jasionbike.com](mailto:support@jasionbike.com).



## Charge Your E-Bike

Before using the electric bike, you must fully charge the battery.



1. Ensure the battery is off, by rotating the key to align with the 2 position.
2. Remove the rubber cover of the charging port.
3. Plug the charger into the battery's charging port. With the battery on or off the bike, place the charger in a flat, secure place, and connect the DC output plug from the charger to the charging port on the side of the battery.
4. Plug the charger into a power outlet, charging should initiate and will be indicated by the LED charge status lights on the charger turning red. Once fully charged, the charging indicator light turning green. Unplug the charger from the wall outlet first and then remove the charger output plug from the battery charging port.



## Charge Your E-Bike

1



1.The battery can be removed from the bicycle for charging. To remove the battery, turn the key to the position 3. (see the previous remove battery section for details).

2



2.Remove the rubber cover on the charging port. Connect the DC output plug from the charger to the charging port on the side of the battery.

3



3.Plug the charger into a power outlet, charging should initiate and will be indicated by the LED charge status lights on the charger turning red. Once fully charged, the charging indicator light turning green. Unplug the charger from the wall outlet first and then remove the charger output plug from the battery charging port.



## Display and Setting

Display Backlight









Speed

Pedal Assist Level












Battery level

Speed Unit

Icon	Meaning
	Battery Level
	Speed AVG: Average Value; MAX: Maximum Value mph: miles per hour; km/h: kilometers per hour
	Pedal Assist Level
	ODO: Total mileage Trip: Single trip mileage Time: Single ride time
	Backlight Indicator
	Cruise Control Mode
	Brake reminder
	Ebike Failure

## LCD Display Controls

Operation	Directions
Turn on bike	Press and hold (  ) until power engages (turn the battery first)
Turn off bike	Press and hold (  ) for 3 seconds
Increase pedal assist (PAS) level	Press  button
Decrease pedal assist (PAS) level	Press  button
Toggle odometer, trip odometer	Press and hold (  ) for 5 seconds
Turn on walking mode	When the ebike is stationary, press and hold (  )
Turn on headlight	Press (  ) button
Activate Electric Bell	Press (  ) button



## LCD Display Operations

**Setting Mode:** When the bike is on, press and hold + and - buttons at the same time to enter the setting mode. Press once M to confirm and enter the next set, press and hold + and - buttons at the same time to store the Setting Mode.

**1.TC MODE:** After entering TC MODE, you can choose whether to clear the TRIP when the bike is off. **Y** mean need to clear the TRIP manually. **∟** mean not clear the TRIP.

## Daily Care and Maintenance

### Cleaning and Storage

If you see stains on the bike body, wipe them off with a damp cloth. If the stains can't be scrubbed off, apply some toothpaste, and brush them with a tooth brush, then wipe them off with a damp cloth.

Notes: Do not clean the bike with alcohol, gasoline, kerosene or other corrosive and volatile chemical solvents to prevent dire damage. Do not wash the bike with a high-pressure water spray. During cleaning, make sure that the bike is turned off, the charging cable is unplugged, and the rubber flap is closed as water leakage may cause electric shock or other major problems. When the bike is not in use, keep it indoors where it is dry and cool. Do not put it outdoors for a long time. Excessive sunlight, overheating and over cooling will shorten the battery pack's life span.

### Battery Maintenance

1. Use original battery packs, use the other models or brands may bring about safety issues.
2. Do not touch the contacts. Do not dismantle or puncture the casing. Keep the contacts away from metal objects to prevent short circuit which may result in battery damage or even injuries and deaths.
3. Use original power adapter to avoid potential damage or fire.
4. Mishandling of used batteries may do tremendous harm to the environment. To protect natural environment, please follow local regulations to properly dispose used batteries.
5. After every use, fully charge the battery to prolong its life span.

### Storage and Disposal

1. Please try to store the bike in a cool and dry place between 14°F and 104°F. In extremely humid environments the interior of the bike may suffer condensation or even water accumulation, which may damage the battery rapidly. Devices are not intended for use prolonged exposure to UV rays, rain, and the elements may damage the enclosure materials, stored indoors when not in use.
2. In daily use, try to avoid recharging the bike after completely exhausting the battery. If the battery is low, charge it as soon as possible.
3. Please charge the bike every other month to preserve the battery.

## Recommended Service Intervals

Regular inspection and maintenance are the key to ensure bikes from jasion function as intended, and to reduce wear and tear on their systems. Recommended service intervals are meant to be used as guidelines. Actual wear and tear, and the need for service, will vary depending on conditions of use. We generally recommend inspections, service, and necessary replacements be performed at the time or mileage interval that comes first in the following table.

Interval	Inspect	Service	Replace
Weekly, 100-200 mi (160-321 km)	<ul style="list-style-type: none"><li>- Check drivetrain for proper alignment and function (including the chain, freewheel, chainring, and derailleur).</li><li>- Check wheel trueness and for quiet wheel operation (without spoke noise).</li><li>- Check condition of frame for any damage.</li></ul>	<ul style="list-style-type: none"><li>- Clean frame by wiping frame down with damp cloth.</li><li>- Use barrel adjuster(s) to tension derailleur/brake cables if needed.</li></ul>	<ul style="list-style-type: none"><li>- Replace any components confirmed by Jasion Support Team or a certified, reputable bike mechanic to be damaged beyond repair or broken.</li></ul>
Monthly, 250-750 mi (402-1207 km)	<ul style="list-style-type: none"><li>- Check brake pad alignment, brake cable tension.</li><li>- Check bike is shifting properly, proper derailleur cable tension.</li><li>- Check chain stretch.</li><li>- Check brake and shifter cables for corrosion or fraying.</li><li>- Check spoke tension.</li><li>- Check accessory mounting (rack mounting bolts, fender hardware, and alignment).</li></ul>	<ul style="list-style-type: none"><li>- Clean and lubricate drivetrain.</li><li>- Check crankset and pedal torque.</li><li>- Clean brake and shift cables.</li><li>- True and tension wheels if any loose spokes are discovered.</li><li>- Balance the battery.</li></ul>	<ul style="list-style-type: none"><li>- Replace brake and shift cables if necessary.</li><li>- Replace brake pads if necessary.</li></ul>
Every 6 Months, 750-1250mi (1207-2011km)	<ul style="list-style-type: none"><li>- Inspect drivetrain (chain, chainring, freewheel, and derailleur).</li><li>- Inspect all cables and housings.</li></ul>	<ul style="list-style-type: none"><li>- Standard tune-up by certified, reputable bike mechanic is recommended.</li><li>- Grease bottom bracket.</li></ul>	<ul style="list-style-type: none"><li>- Replace brake pads.</li><li>- Replace tires if necessary.</li><li>- Replace cables and housings if necessary.</li></ul>

## Pre-Ride Safety Checklist

Notice: Before every ride, and after every 25-45 miles(40-72 km), we advise following the pre-ride safety checklist.

Safety Check	
1.Brakes	Ensure front and rear brakes work properly. Check brake pads for wear and ensure they are not overworn. Ensure brake pads are correctly positioned in relation to the rims. Ensure brake cables are lubricated, correctly adjusted, and display no obvious wear. Ensure brake levers are lubricated and tightly secured to the handlebar. Test that the brake levers are firm and that the brake, and the brake light are functioning properly.
2.Wheels and Tires	Ensure tires are inflated within the recommended limits posted on the tire sidewalls and hold air. Ensure tires have good tread, have no bulges or excessive wear, and are free from any other damage. Ensure rims run true and have no obvious wobbles, dents, or kinks. Ensure all wheel spokes are tight and not broken. Check axle nuts and front wheel quick release to ensure they are tight. Ensure the locking lever on the quick release skewer is correctly tensioned, fully closed, and secured.
3.Steering	Ensure the handlebar and stem are correctly adjusted, tightened, and allow proper steering. Perform a handlebar twist test (see assembly step 4) to ensure the stem clamp bolt security. Ensure the handlebar is set correctly in relation to the fork and the direction of travel.
4. Chain	Ensure the chain is clean, oiled, and runs smoothly. Extra care is required in wet, salty/otherwise corrosive, or dusty conditions.
5. Bearings	Ensure all bearings are lubricated, run freely, and display no excess movement, grinding, or rattling. Check headset, wheel bearings, pedal bearings, and bottom bracket bearings.
6. Cranks and Pedals	Ensure pedals are securely tightened to the cranks. Ensure the cranks are securely tightened and are not bent.
7. Derailleur and Mechanical Cables	Check that the derailleur is adjusted and functioning properly. Ensure shifter and brake levers are attached to the handlebar securely. Ensure all shifter and brake cables are properly lubricated.

Safety Check	
8. Frame, Fork, and Seat	Check that the frame and fork are not bent or broken. If either frame or fork are bent or broken, they should be replaced. Check that the seat is adjusted properly, and seatpost quick release lever is securely tightened.
9. Motor Drive Assembly and Throttle	Ensure hub motor is spinning smoothly and motor bearings are in good working order. Ensure all power cables running to hub motor are secured and undamaged. Make sure the hub motor axle bolts are secured and the torque arm, torque arm bolt, and torque washers are in place.
10. Battery	Ensure battery is charged before use. Ensure there is no damage to battery. Lock battery to frame and ensure that it is secured. Charge and store bike and battery in a dry location, between 50 °F – 77 °F (10 °C – 25 °C). Let bike dry completely before using again.
11. Electrical Cables	Look over connectors to make sure they are fully seated and free from debris or moisture. Check cables and cable housing for obvious signs of damage. Ensure headlight, taillight, and brake light are functioning, adjusted properly, and unobstructed.
12. Accessories	Ensure all reflectors are properly fitted and not obscured. Ensure all other fittings on bike are properly secured and functioning. Inspect helmet and other safety gear for signs of damage. Ensure rider is wearing a helmet and other required riding safety gear. Ensure mounting hardware is properly secured if fitted with a front rack, rear rack, basket, etc. Ensure the taillight and taillight power wire are properly secured if fitted with rear rack. Ensure the fender mounting hardware is properly secured if fitted with fenders. Ensure there are no cracks or holes in fenders. If installed, ensure the optional rear wheel lock is secured in the unlocked position and the key is removed before every ride.




**Your cables, spokes, and chain will stretch after an initial break-in period of 50-100 mi (80-160 km), and bolted connections can loosen. Always have a certified, reputable bike mechanic perform a tune-up on your bike after your initial break-in period of 50-100 mi (80-160 km) (depending on riding conditions such as total weight, riding characteristics, and terrain). Regular inspections and tune-ups are particularly important for ensuring that your bike remains safe and fun to ride.**

## Tire Inflation and Replacement


The Hunter employs 20X4.0" rubber tires with inner tubes. The tires are designed for durability and safety for regular cycling activities and need to be checked before each use for proper inflation and condition. Proper inflation, care, and timely replacement will help ensure that your bike's operational characteristics will be maintained, and unsafe conditions avoided.


Jasion recommends **35 PSI** for the stock tires on the jasion. Always stay within the manufacturer's recommended air pressure range as listed on the tire sidewall.

 **It is critically important that proper air pressure is always maintained in pneumatic tires. Do not underinflate or overinflate your tires. Low pressure may result in loss of control, and overinflated tires may burst. Failure to always maintain the air pressure rating indicated on pneumatic tires may result in tire and/or wheel failure.**

 **Inflate your tires from a regulated air source with an available pressure gauge. Inflating your tires from an unregulated air source could overinflate them, resulting in a burst tire.**

Even tires equipped with built-in, flat-preventative tire liners, like those that come with bikes from jasion, can and do get flats from punctures, pinches, impact, and other causes. When tire wear becomes evident or a flat tire is discovered, tires and/or tubes must be replaced before operating the bike or injury to operators and/or damage to your bike from jasion could occur.

 **When changing a tire or tube, ensure that all air pressure has been removed from the inner tube prior to removing the tire from the rim. Failure to remove all air pressure from the inner tube could result in serious injury.**

 **Using aftermarket tires or inner tubes, not provided by jasion may void your warranty, create an unsafe riding condition, or damage to your bike. If required by law, ensure replacement aftermarket tires have sufficient reflective sidewall striping.**

For more information on tire or tube replacement procedures, or questions about tire inflation, visit [www.jasionride.com](http://www.jasionride.com) or contact Jasion Support Team.

Email: [support@jasionbike.com](mailto:support@jasionbike.com)

## Troubleshooting

	Symptoms	Possible Causes	Most Common Solutions
1	The bike does not work	<ol style="list-style-type: none"> <li>1. Insufficient battery power</li> <li>2. Faulty connections</li> <li>3. Battery not fully seated in tray</li> <li>4. Improper turn on sequence</li> <li>5. Brakes are applied</li> <li>6. Blown discharge fuse</li> </ol>	<ol style="list-style-type: none"> <li>1. Charge the battery</li> <li>2. Clean and repair connectors</li> <li>3. Install battery correctly</li> <li>4. Turn on bike with proper sequence</li> <li>5. Disengage brakes</li> <li>6. Replace discharge fuse</li> </ol>
2	Irregular acceleration and/or reduced top speed	<ol style="list-style-type: none"> <li>1. Insufficient battery power</li> <li>2. Loose or damaged throttle</li> <li>3. Misaligned or damaged magnet ring</li> </ol>	<ol style="list-style-type: none"> <li>1. Charge or replace battery</li> <li>2. Replace throttle</li> <li>3. Align or replace magnet ring</li> </ol>
3	The motor does not respond when the bike is powered on	<ol style="list-style-type: none"> <li>1. Loose wiring</li> <li>2. Loose or damaged throttle</li> <li>3. Loose or damaged motor plug wire</li> <li>4. Damaged motor</li> </ol>	<ol style="list-style-type: none"> <li>1. Repair and or reconnect</li> <li>2. Tighten or replace</li> <li>3. Secure or replace</li> <li>4. Repair or replace</li> </ol>
4	Reduced range	<ol style="list-style-type: none"> <li>1. Low tire pressure</li> <li>2. Low or faulty battery</li> <li>3. Driving with too many hills, headwind, braking, and/or excessive load</li> <li>4. Battery discharged for long period of time without regular charges, aged, damaged, or unbalanced</li> <li>5. Brakes rubbing</li> </ol>	<ol style="list-style-type: none"> <li>1. Adjust tire pressure</li> <li>2. Check connections or charge battery</li> <li>3. Assist with pedals or adjust route</li> <li>4. Balance the battery; contact Tech Support if range decline persists</li> <li>5. Adjust the brakes</li> </ol>
5	The battery will not charge	<ol style="list-style-type: none"> <li>1. Charger not well connected</li> <li>2. Charger damaged</li> <li>3. Battery damaged</li> <li>4. Wiring damaged</li> <li>5. Blown charge fuse</li> </ol>	<ol style="list-style-type: none"> <li>1. Adjust the connections</li> <li>2. Replace</li> <li>3. Replace</li> <li>4. Repair or replace</li> <li>5. Replace charge fuse</li> </ol>
6	Wheel or motor makes strange noises	<ol style="list-style-type: none"> <li>1. Loose or damaged wheel spokes or rim</li> <li>2. Loose or damaged motor wiring</li> </ol>	<ol style="list-style-type: none"> <li>1. Tighten, repair, or replace</li> <li>2. Reconnect or replace motor.</li> </ol>

# Specifications

ITEM	SPECIFICATIONS
Model	X-Hunter
Product Dimensions	185x72x110-120 (cm)
E-bike Weight	71lbs (32kg)
Package Weight	84lbs (38kg)
Rated Load	480lbs (218kg)
Range: Pedal-Assist ; Pure Electric Mode	65-71miles (105-115km) ; 60-63miles(97-102km)
Max Angle of Climb	25 degrees
Max Speed	30+mph
Battery; Charger	48V 13AH; 54.6V 2A
Charging Time	6.5-7h
Output; Nominal Voltage	110 - 127V
Bell/Horn	Electric Horn Installed
Tire Pressure; Tire Size	35P.S.I. ; 20x4.0
Motor Type	Brushless High Speed Motor
Motor Specification	1400W

# FAQS

Q<sub>1</sub>: What if the e-bike arrived missing accessory or broken part?

A<sub>1</sub>: Please take a photo and send to Jasion Support Team by sending email: support@jasionbike.com and Jasion Support Team will reply you soon and send correct accessory or part replacement.

Q<sub>2</sub>: Will my bike arrive assembled?

A<sub>2</sub>: Your bike will arrive mostly assembled. We' ll also provide the tools and a comprehens assembly video for the rest part.

Q<sub>3</sub>: What can I do if something goes wrong with my e-bike during the warranty?

A<sub>3</sub>: We believe that communication is the best way to solve the problem. Please contact us in time. To help you solve the problem as quickly as possible, please describe the prob in detail and provide photos/videos with your order ID.

# Error Code

Error Code	
21	Current issue
22	Throttle issue
23	Power motor issue
24	Power motor signal issue
25	Braking handle issue
30	Communication issue





# Limited Warranty

## 14DAYS SATISFACTION GUARANTEED RETURN POLICY

If you are unsatisfied with your purchase, Jasion's return policy allows you to return the product purchased on the Authorization channel within 14 days counting from the date of receipt of shipment, and request are fund from the Authorization channel.

Note: Express shipping cost is non-refundable.

To be eligible for a return, your item must be in the same condition that you received it, unworn, unused, and the bike must have less than ten (10) miles on the odometer, be free of any wear and tear, dirt, dust, fragrance, or any other signs of use and must include all items that were inside the box (charger, keys, hardware, etc.).

Over 14 days: Return is not acceptable; Accept exchange new product or partial refund.

We will deduct the shipping fee or restocking \$180/pc when we are making a refund for non-defective products or no longer needed products.

For the return request, Jasion is not responsible for lost packages due to the carrier, or products received that can not be verified.

Received products that have damage determined to have been caused by the end-user maybe subject to denial of the return request.

## TO QUALIFY FOR A REFUND, ALL THE FOLLOWING CONDITIONS MUST BE MET:

1. A Return Merchandise Authorization(RMA) must be requested from Jasion within 30 days from the date of receipt of shipment. To request an RMA, contact Jasion Support Team at [support@jasionbike.com](mailto:support@jasionbike.com).
2. The cost of return shipping will be paid by the customer.
3. For warranty service, please keep your receipt and/or invoice to validate proof of purchase.
4. Returned product must be in good physical condition(not physically broken or damaged).
5. All accessories originally included with your purchase must be included with your return.
6. If you return a product to Jasion, (a) without an RMA from Jasion(b) without all parts included in the original package, Jasion retains the right to refuse delivery of such return.

## LIMITED PRODUCT WARRANTY

Jasion warrants the original purchaser that your Jasion product shall be free from defects in materials and workmanship under normal use for a period aforementioned. Jasion does not warrant the operation of the product will be uninterrupted or error-free.

- Only the original owner of an ebike purchased from Jasions online or physical storefront is covered by this Limited Warranty. The Warranty Period begins upon your receipt of the ebike and shall end immediately upon the earlier of the end of the Warranty Period or any sale or transfer of the ebike to another person, and under no circumstances shall the Limited Warranty apply to any subsequent owner or other transferee of the ebike.

- The Limited Warranty is expressly limited to the replacement of a defective lithium ion battery (the “battery”), frame, forks, stem, handlebar, headset, seat post, saddle, brakes, lights, bottom bracket, crank set, pedals, rims, wheel hub, freewheel, cassette, derailleur, shifter, motor, throttle, controller, wiring harness, LCD display, kickstand, reflectors and hardware (each a “Covered Component”).
- The Covered Components are warranted to be free of defects in materials and/or workmanship during the Warranty Period.

### Limited Warranty Does Not Cover:

- Normal wear and tear of any Covered Component.
- Consumables or normal wear and tear parts (including without limitation tires, tubes, brake pads, cables and housing, grips, chain and spokes).
- Any damage or defects to Covered Components resulting from failure to follow instructions in the ebike owner’s manual, acts of God, accident, misuse, neglect, abuse, commercial use, alterations, modification, improper assembly, installation of parts or accessories not originally intended or compatible with the ebike as sold, operator error, water damage, extreme riding, stunt riding, or improper follow-up maintenance.
- For the avoidance of doubt, Jasion will not be liable and/or responsible for any damage, failure or loss caused by any unauthorized service or use of unauthorized parts.
- The battery is not warranted from damage resulting from power surges, use of an improper charger, improper maintenance or other such misuse, normal wear or water damage.
- Any products sold by Jasion that is not an ebike.

## Contact Us

Contact us if you experience issues relating to riding, maintenance and safety, or errors/faults with your JASION.

**Support Email: [support@jasionbike.com](mailto:support@jasionbike.com)**

**Tel: +1 888 301 6908**



Scan the QR code and join our Facebook Group.

Share your riding experience with other rides and get an exclusive bonus!

## JASION LTD

 [www.jasionbike.com](http://www.jasionbike.com)

 [support@jasionbike.com](mailto:support@jasionbike.com)

 [jasionbike\\_official](https://www.youtube.com/jasionbike_official)

 [jasionbikes](https://www.instagram.com/jasionbikes)

 [@Jasion Ebikes](https://www.facebook.com/@JasionEbikes)

 [jasionbike\\_official](https://www.tiktok.com/jasionbike_official)