


HAI

# HIDDEN AGENDA FLUSH FACE BRACKET SYSTEM

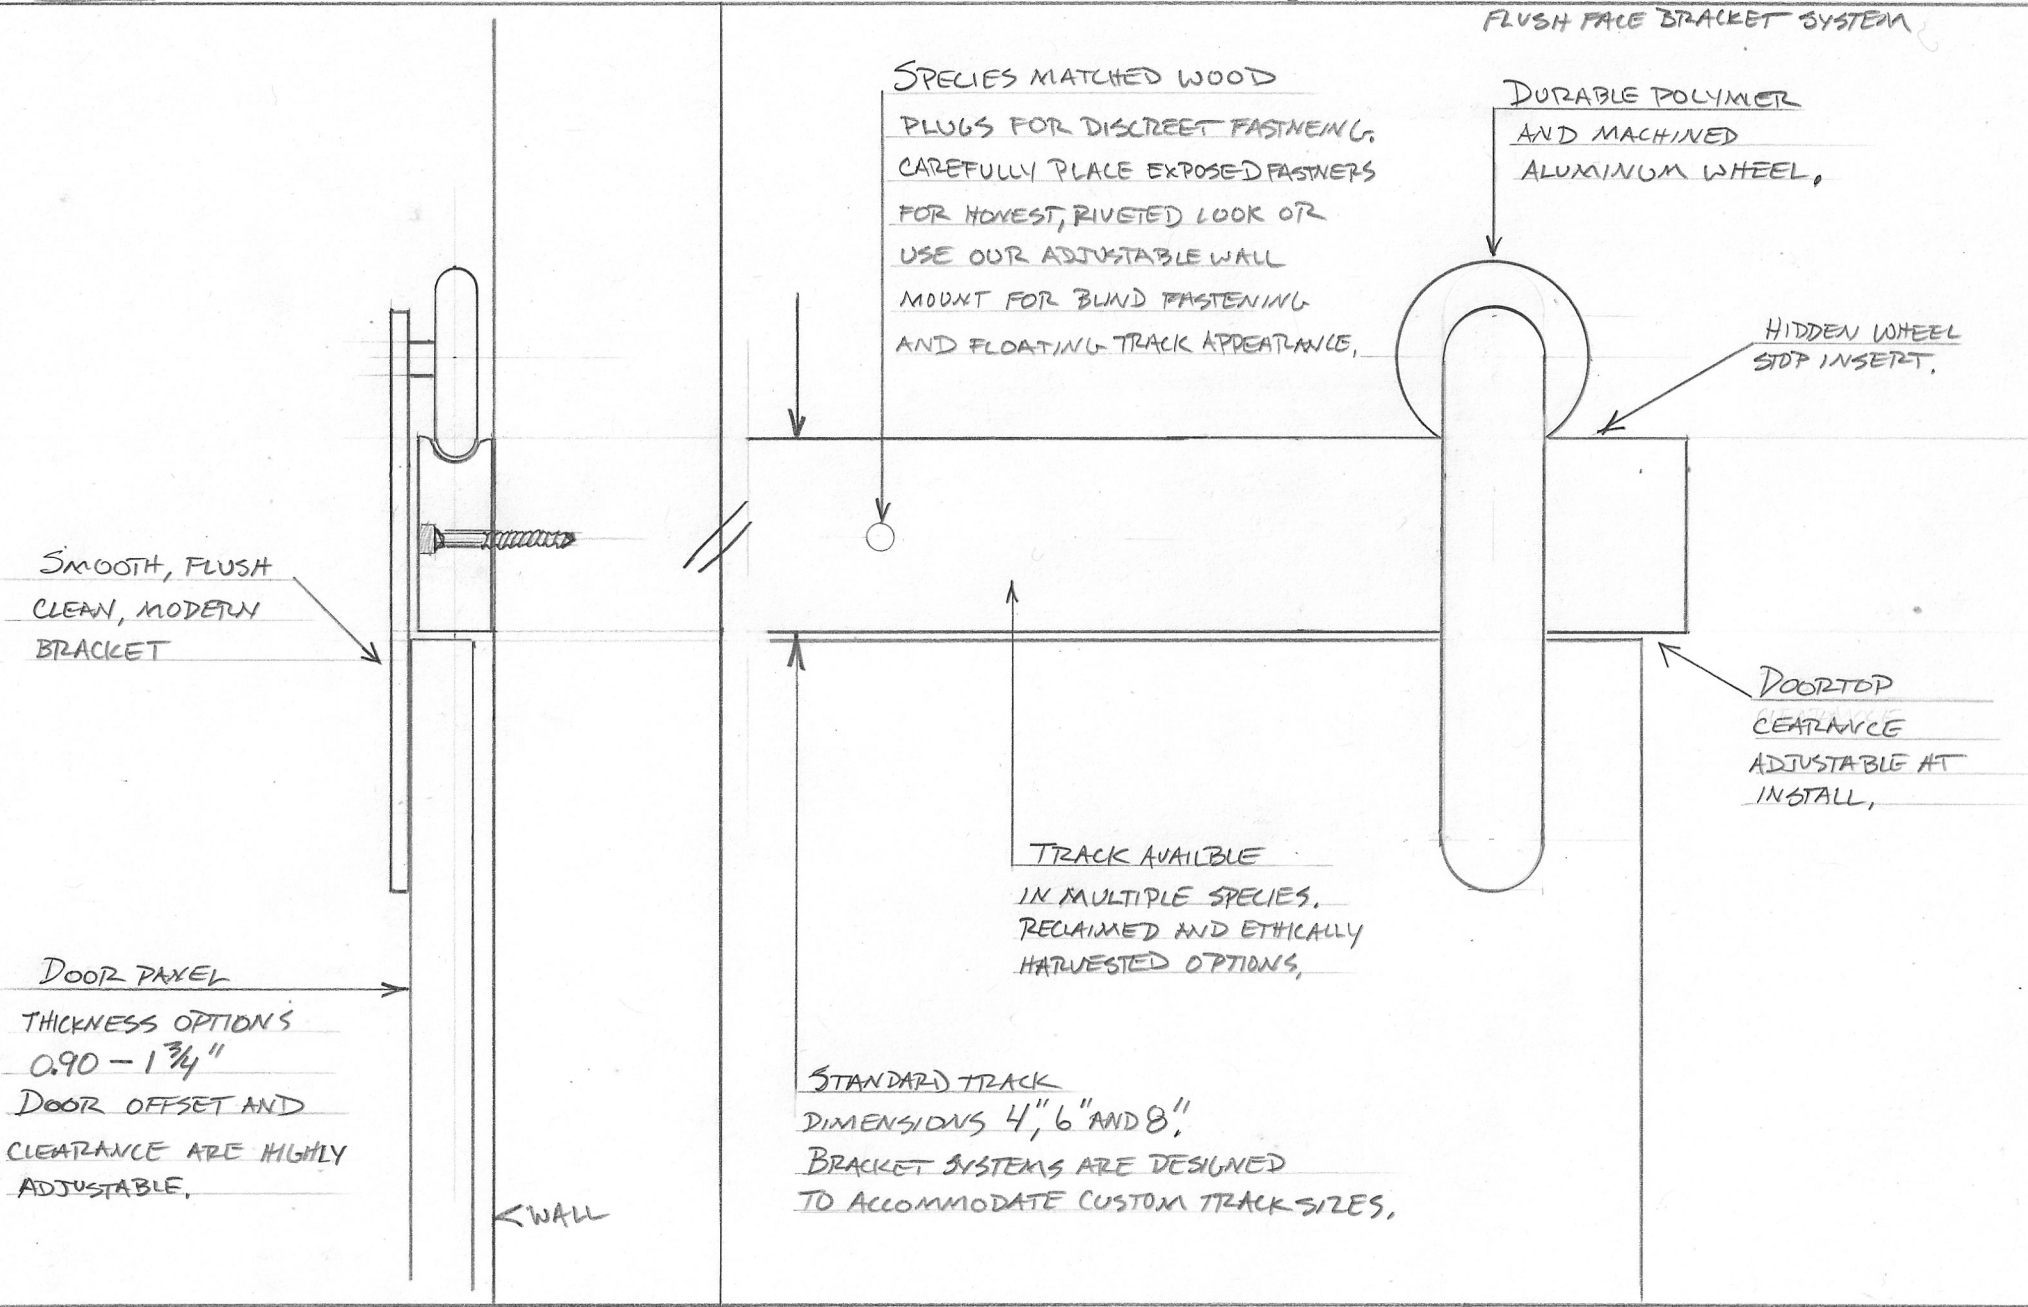

SPECIES MATCHED WOOD  
PLUGS FOR DISCREET FASTENING,  
CAREFULLY PLACE EXPOSED FASTENERS  
FOR HONEST, RIVETED LOOK OR  
USE OUR ADJUSTABLE WALL  
MOUNT FOR BLIND FASTENING  
AND FLOATING TRACK APPEARANCE,

DURABLE POLYMER  
AND MACHINED  
ALUMINUM WHEEL,

HIDDEN WHEEL  
STOP INSERT,

SMOOTH, FLUSH  
CLEAN, MODERN  
BRACKET

DOOR PAXEL  
THICKNESS OPTIONS  
0.90 - 1 3/4"  
DOOR OFFSET AND  
CLEARANCE ARE HIGHLY  
ADJUSTABLE,

← WALL

TRACK AVAILABLE  
IN MULTIPLE SPECIES,  
RECLAIMED AND ETHICALLY  
HARVESTED OPTIONS,

STANDARD TRACK  
DIMENSIONS 4", 6" AND 8"  
BRACKET SYSTEMS ARE DESIGNED  
TO ACCOMMODATE CUSTOM TRACK SIZES,

DOOR TOP  
CLEARANCE  
ADJUSTABLE AT  
INSTALL,

HA2

ENG DROOVE INC


2/14/21

HIDDEN AGENDA 4/6

1/2" - 1 3/8" DOOR THICKNESS

AXEL STUD #1

MOUNT STD #2

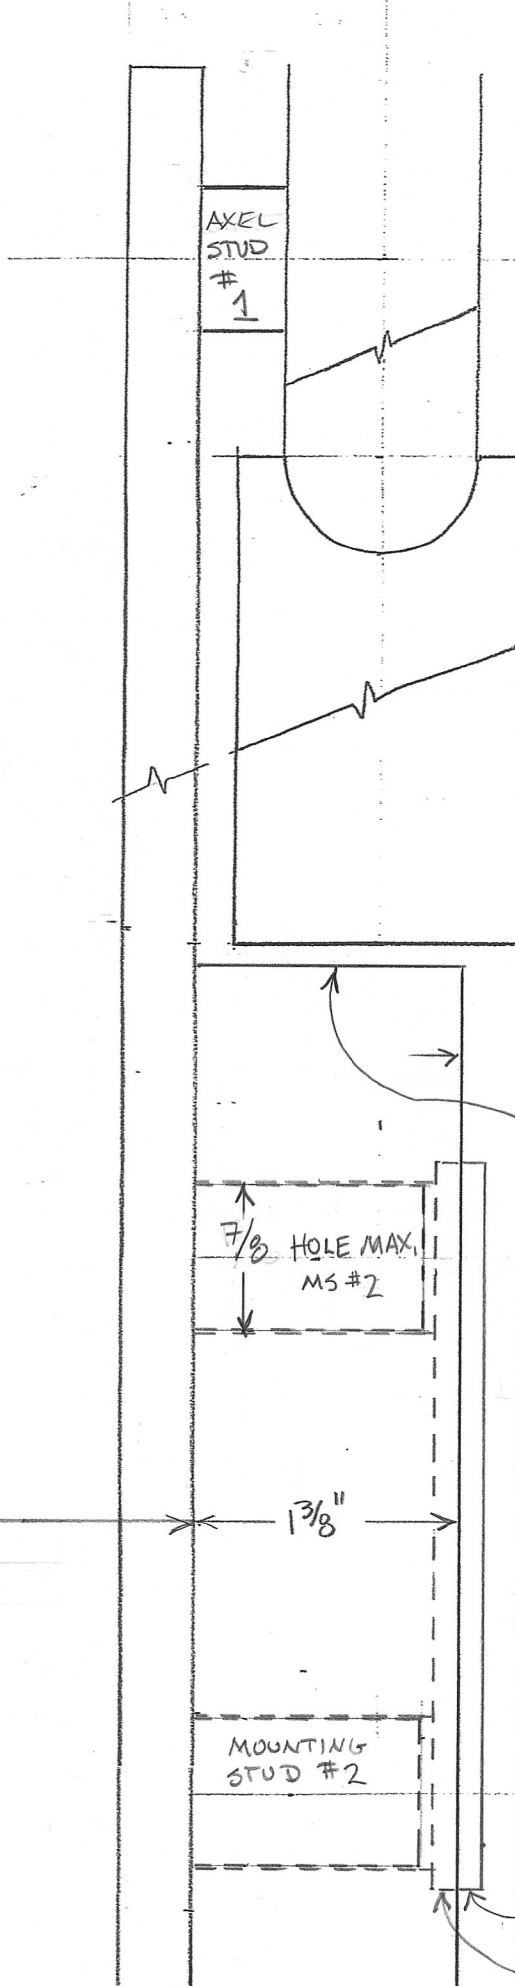

HIDDEN AGENDA 4 WIDTH RANGE 3-4"

HIDDEN AGENDA 6 WIDTH RANGE 4.5-6"

FRS WIDTH RANGE 6-8"

5 1/16"

FACE ADJUSTABLE WITH STUD SPACERS

GAP AT TOP OF DOOR SHOULD NOT EXCEED 3/16"

\* ADD JUMP STOPS IF NECESSARY

PANEL THICKNESS  
OPTIONS 1/2" - 1 3/8"  
RELATIVE TO TRIM  
THICKNESS AND OFFSETS

1 3/8"

FACE OF WALL

FACE MOUNT FINISHING PLATE  
\* (REDUCES CLEARANCE)

OPTION: RECESS FINISHING PLATE

HA3

ENGTROOVE INC


2/14/21

HIDDEN AGENDA 4+6

1/2 - 1 3/8 DOOR THICKNESS

AXEL STUD #1

MOUNT STUD #2

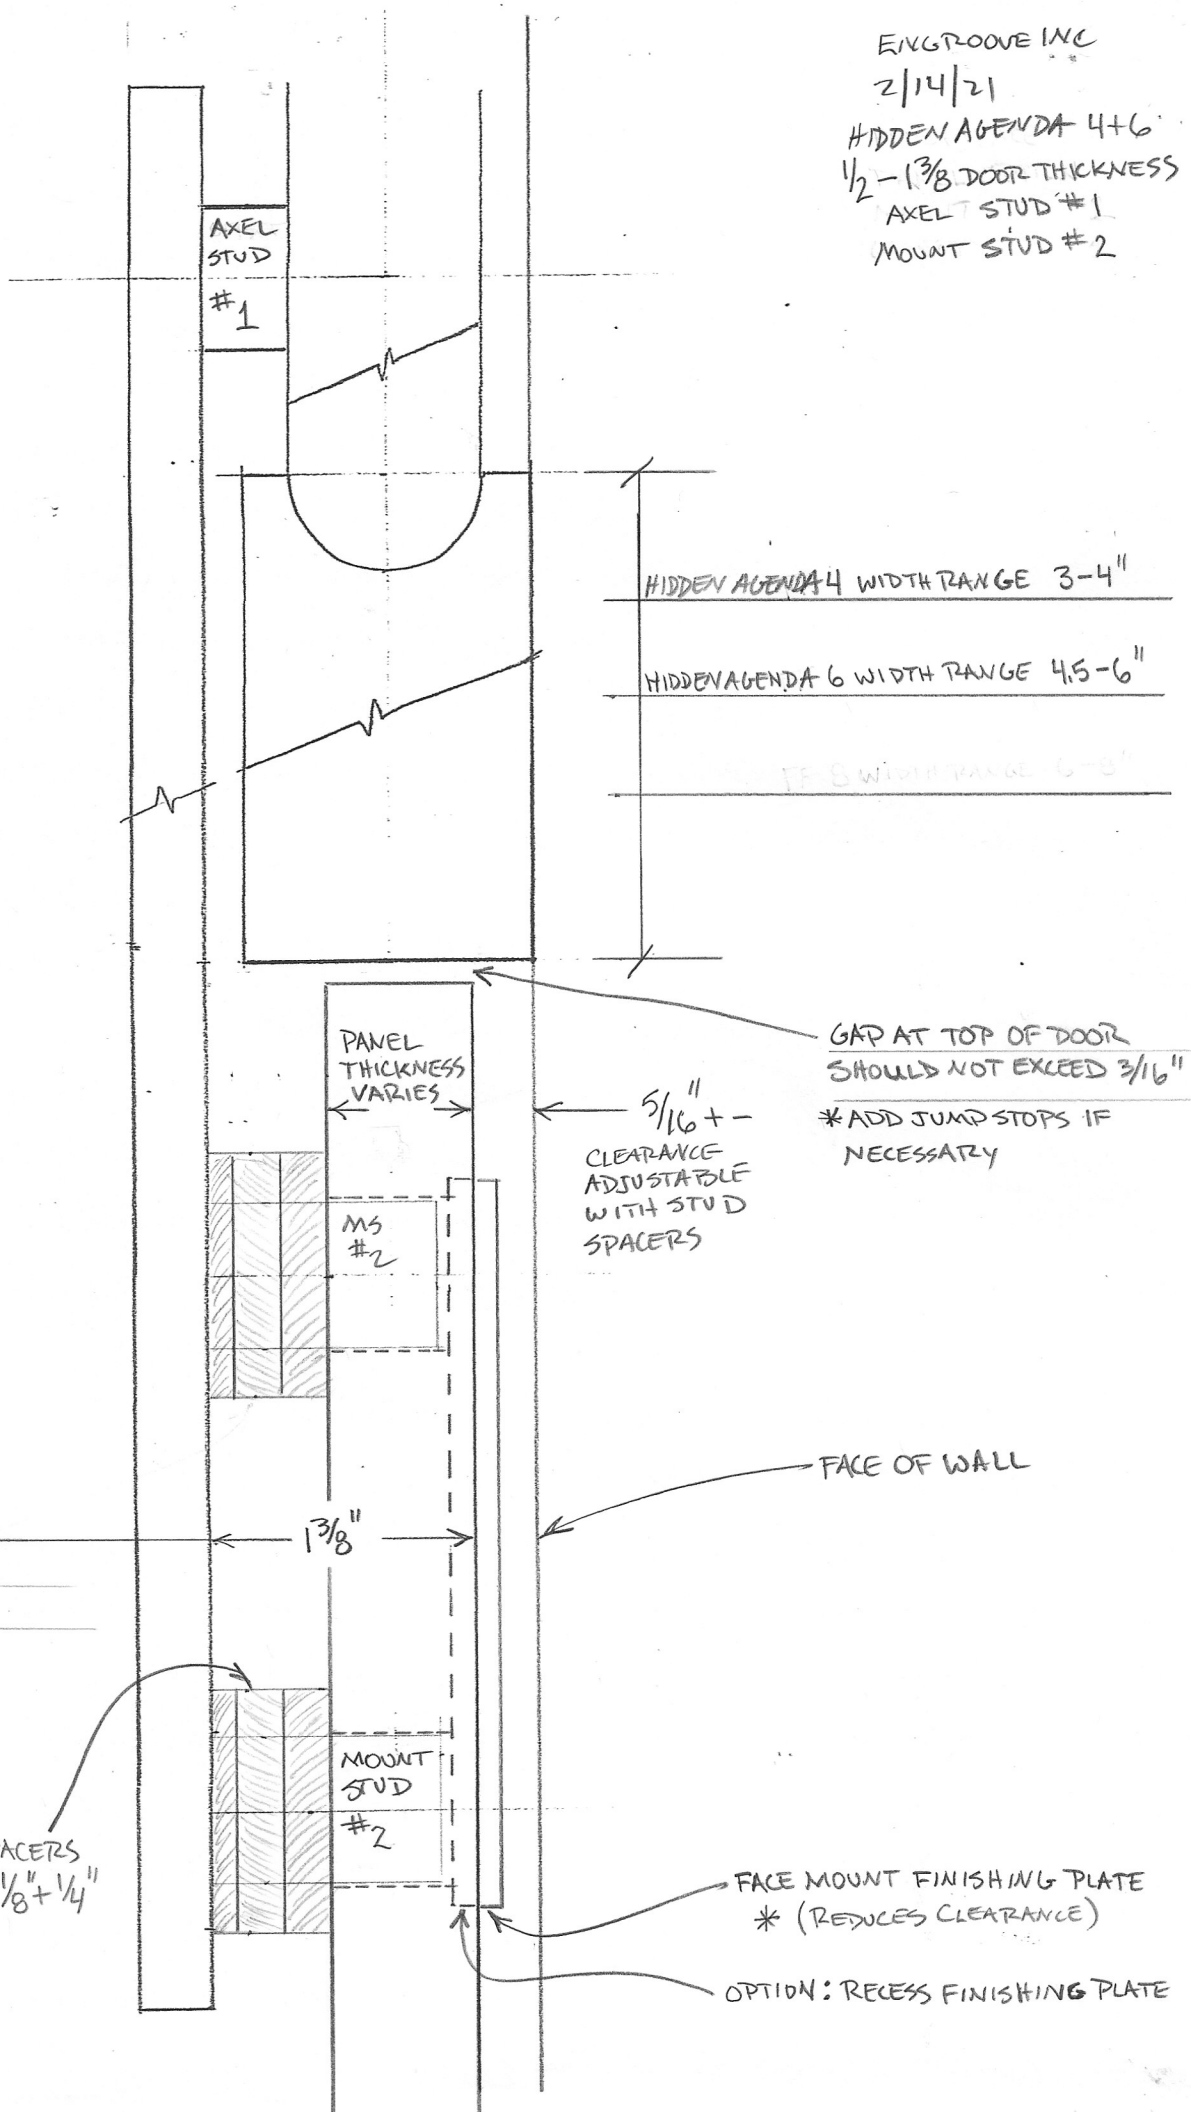

PANEL THICKNESS

OPTIONS 1/2" - 1 3/8"

RELATIVE TO TRIM

THICKNESS AND OFFSETS

PANEL SPACERS  
OPTIONAL 1/8" + 1/4"

PANEL  
THICKNESS  
VARIES

1 3/8"

MOUNT  
STUD  
#2

MS  
#2

AXEL  
STUD  
#1

HIDDEN AGENDA 4 WIDTH RANGE 3-4"

HIDDEN AGENDA 6 WIDTH RANGE 4.5-6"

IF 8 WIDTH RANGE 6-8"

GAP AT TOP OF DOOR  
SHOULD NOT EXCEED 3/16"

\*ADD JUMP STOPS IF  
NECESSARY

5/16" +/-  
CLEARANCE  
ADJUSTABLE  
WITH STUD  
SPACERS


FACE OF WALL

FACE MOUNT FINISHING PLATE  
\* (REDUCES CLEARANCE)

OPTION: RECESS FINISHING PLATE

HA4

ENGROOVE INC.  
2/12/22 REV.  
HIDDEN AGENDA 4+6  
1/2"-3/4" PANEL THICKNESS  
TRIM OPTION  
(AXEL STUD #1  
MOUNT STUD #1)

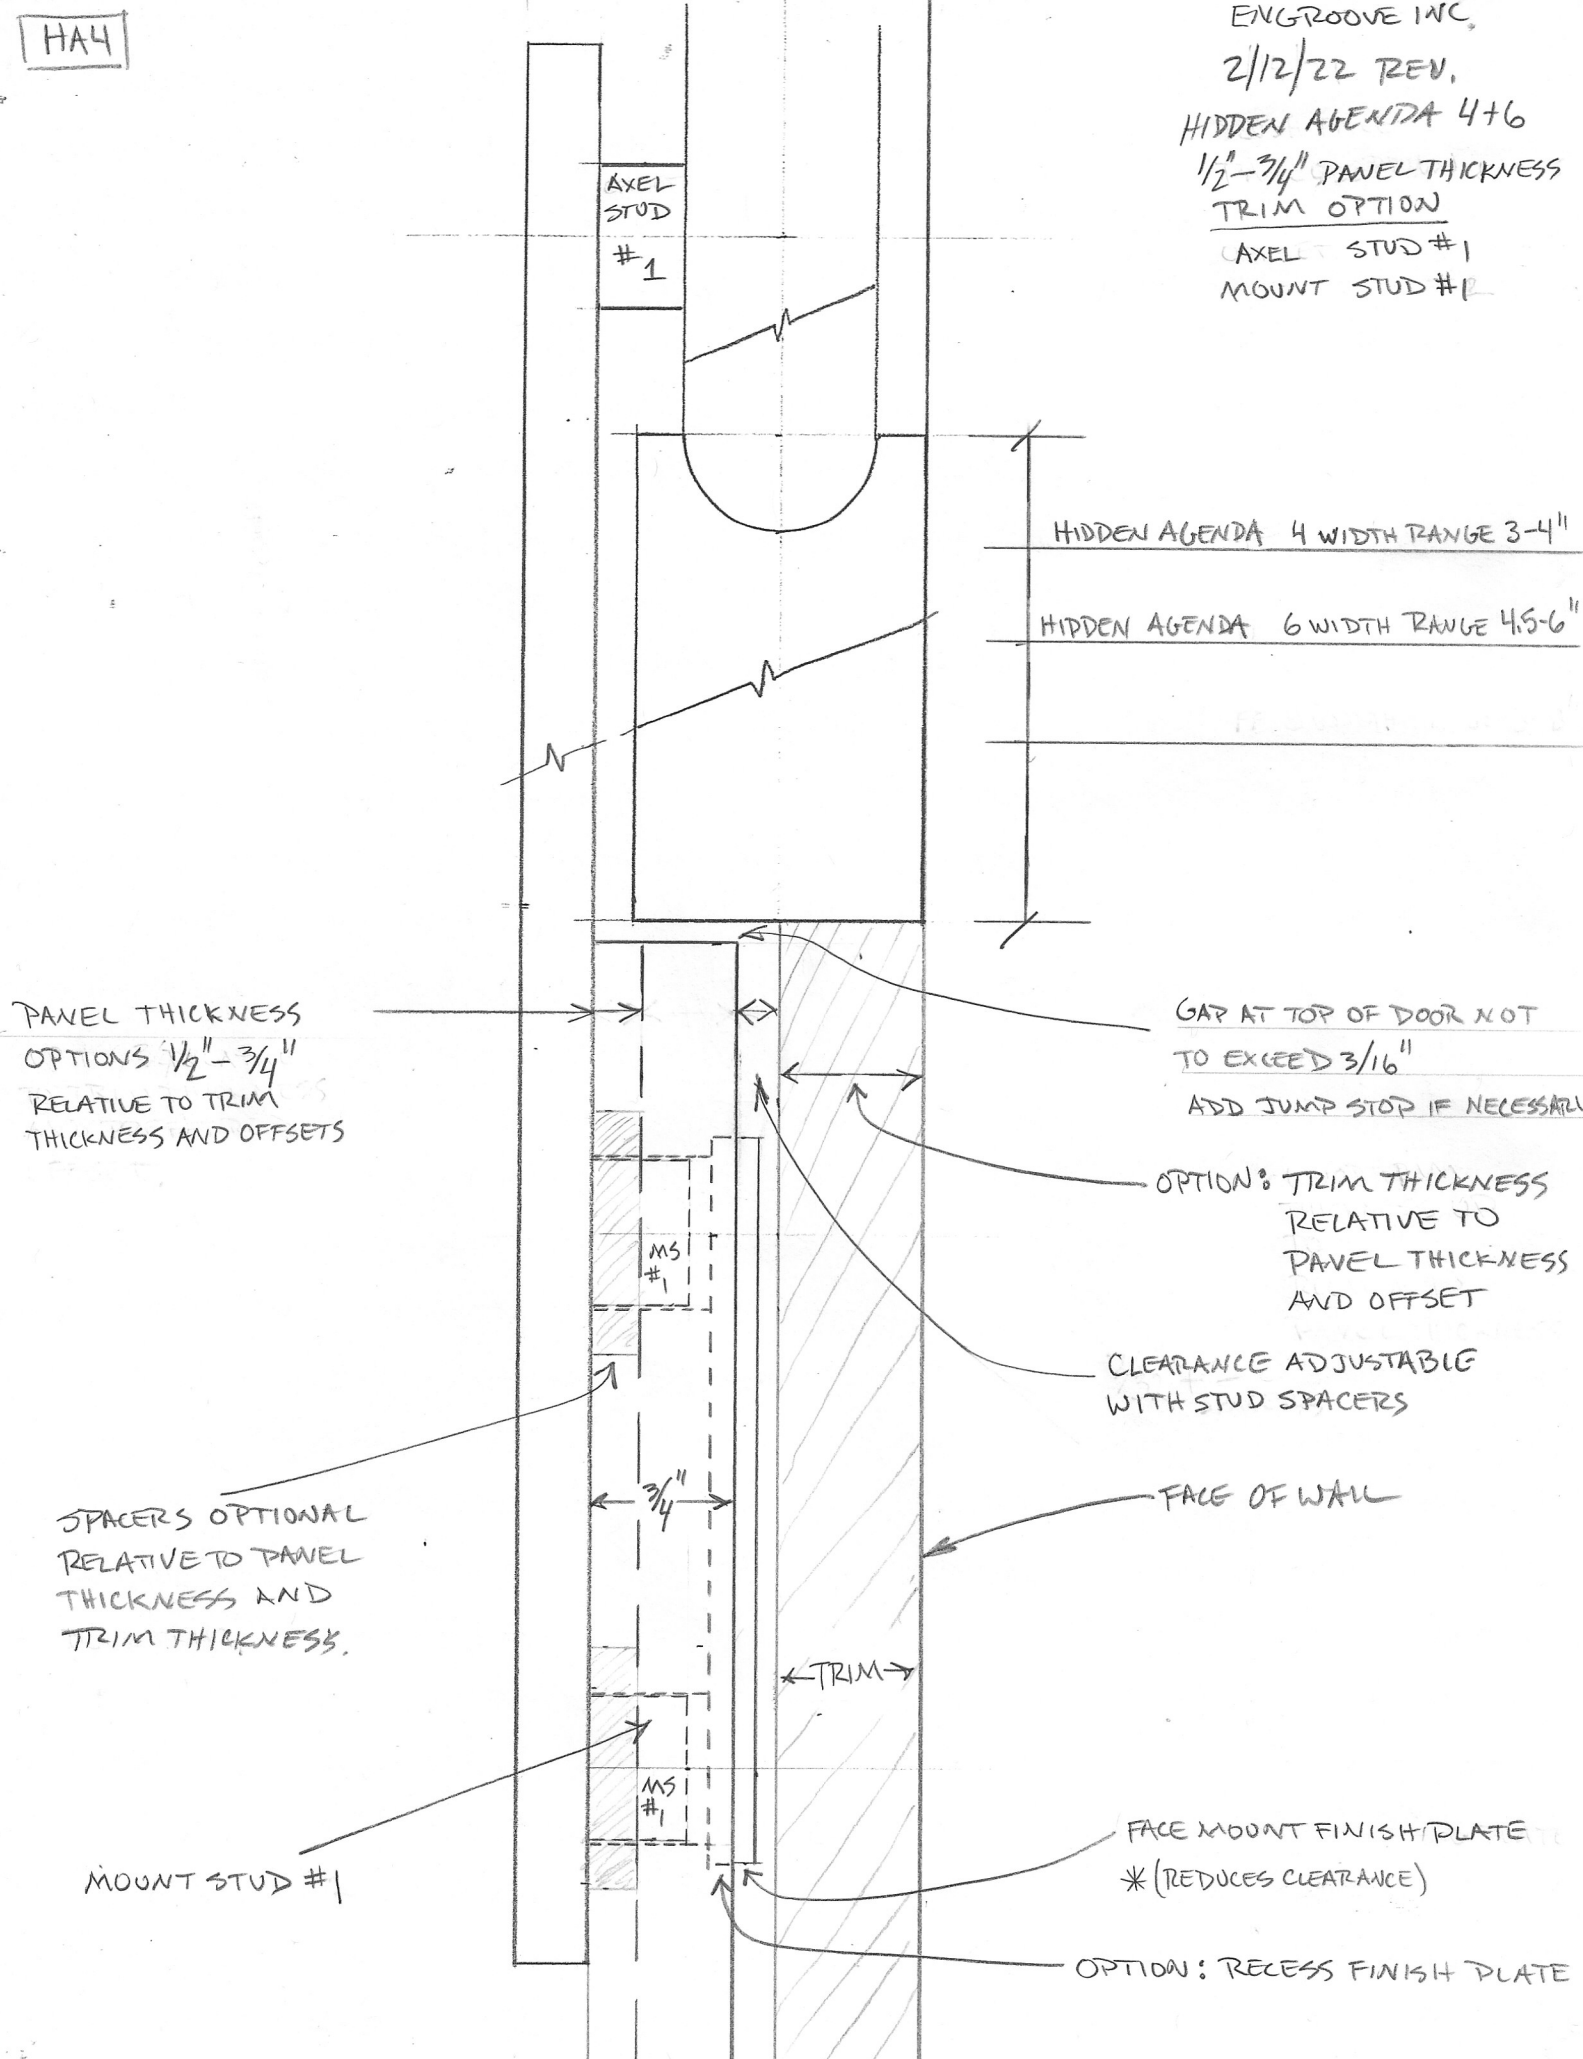

HIDDEN AGENDA 4 WIDTH RANGE 3-4"

HIDDEN AGENDA 6 WIDTH RANGE 4.5-6"

PANEL THICKNESS  
OPTIONS 1/2" - 3/4"  
RELATIVE TO TRIM  
THICKNESS AND OFFSETS

GAP AT TOP OF DOOR NOT  
TO EXCEED 3/16"  
ADD JUMP STOP IF NECESSARY

OPTION: TRIM THICKNESS  
RELATIVE TO  
PANEL THICKNESS  
AND OFFSET

CLEARANCE ADJUSTABLE  
WITH STUD SPACERS

SPACERS OPTIONAL  
RELATIVE TO PANEL  
THICKNESS AND  
TRIM THICKNESS.

FACE OF WALL

MOUNT STUD #1

FACE MOUNT FINISH PLATE  
\* (REDUCES CLEARANCE)

OPTION: RECESS FINISH PLATE

3/4"

TRIM

MS #1


MS #1

AXEL  
STUD  
#1



HA5

ENGROOVE IN R  
2/14/21  
FLUSH FACE  
1/2" - 1 3/4" DOOR THICKNESS  
AXEL STUD #2  
MOUNT STUD #2

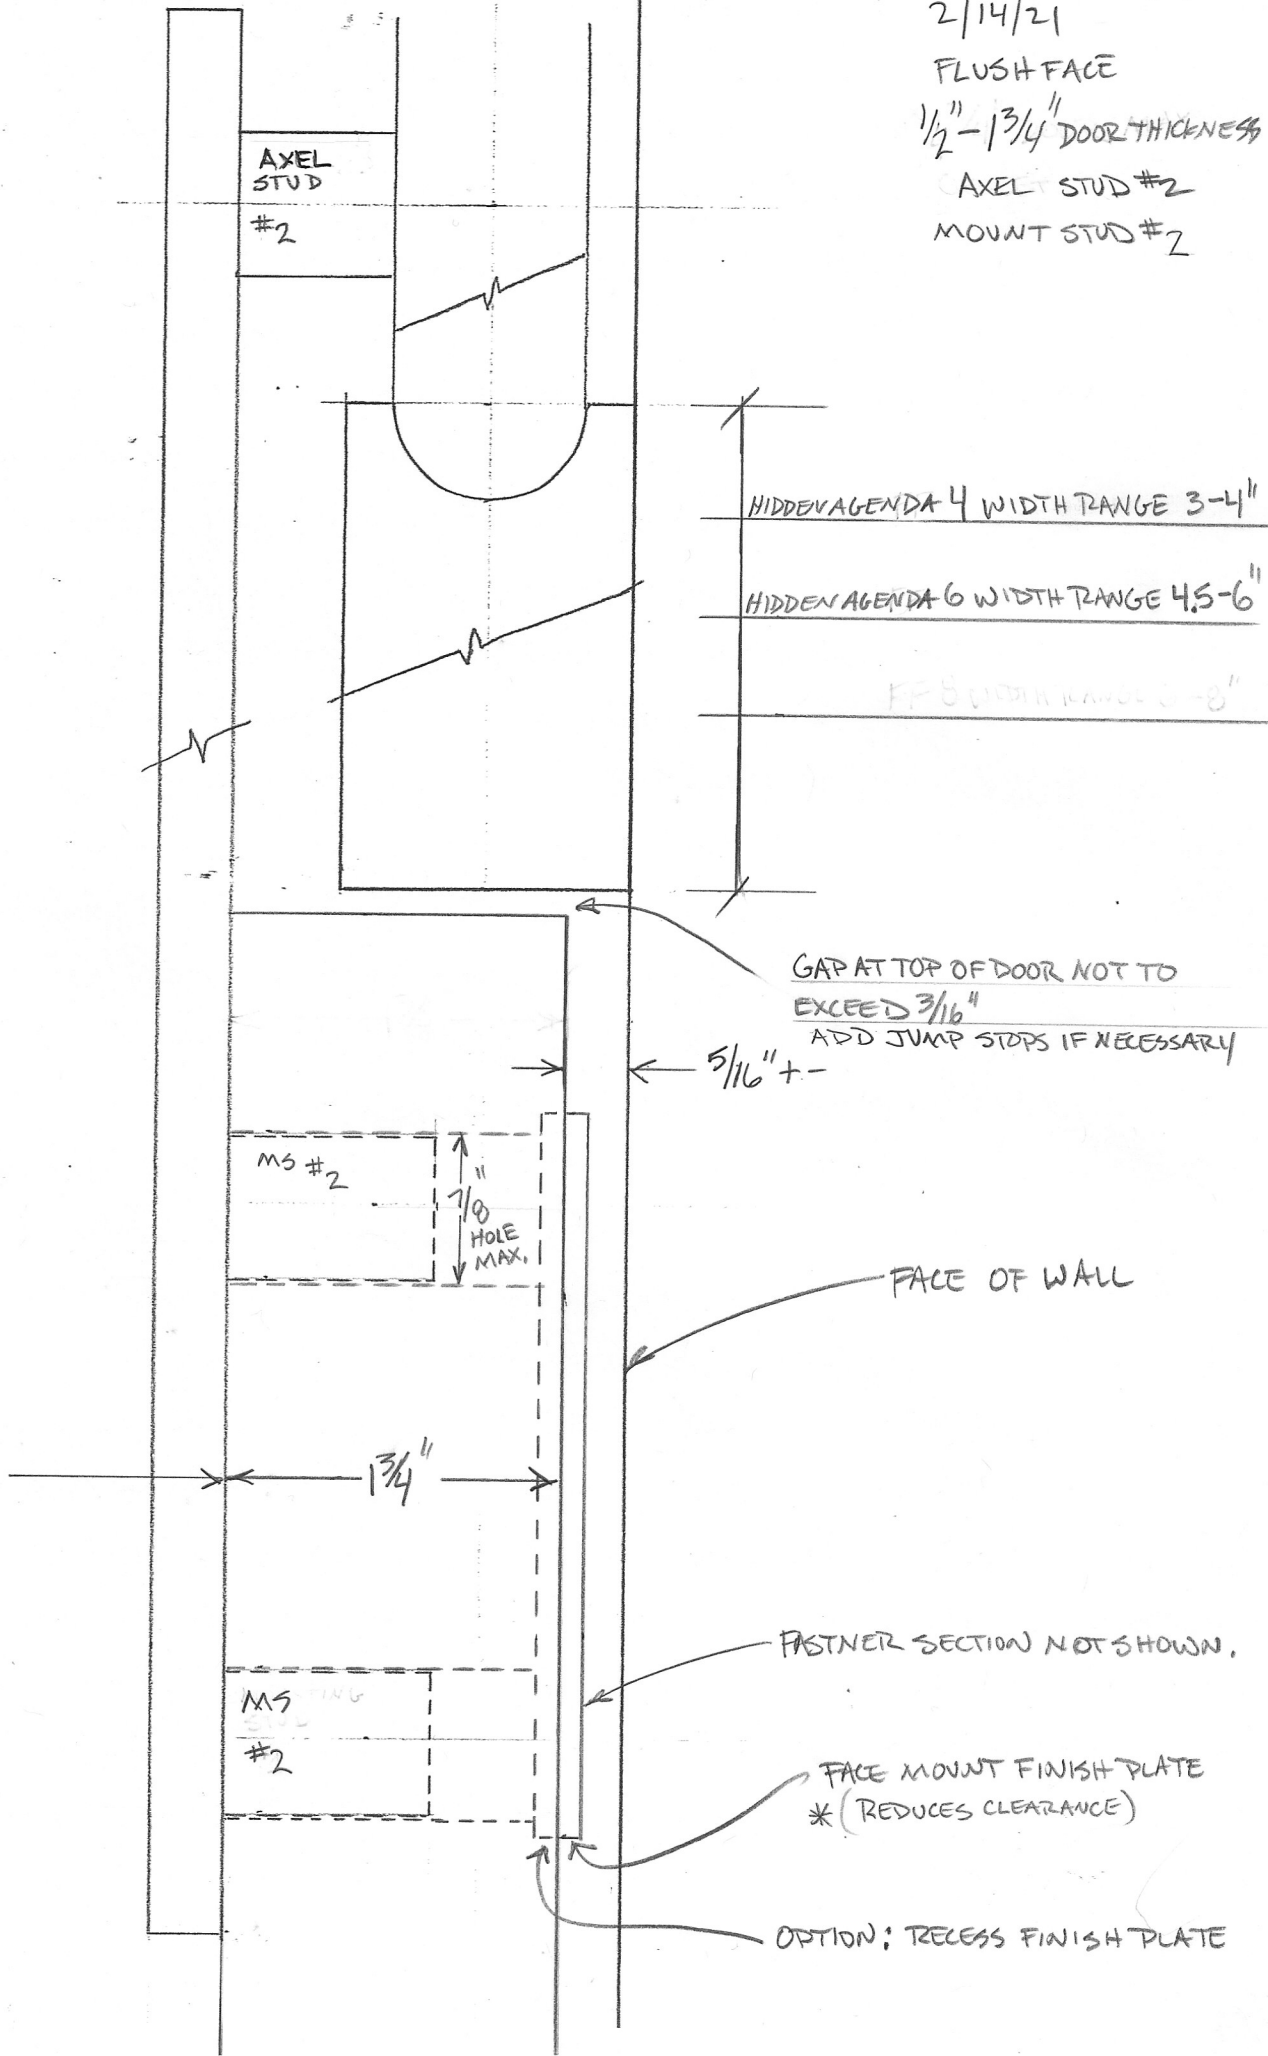

PANEL THICKNESS  
OPTIONS 1/2" - 1 3/4"  
RELATIVE TO TRIM  
THICKNESS AND  
OFFSETS

GAP AT TOP OF DOOR NOT TO  
EXCEED 3/16"  
ADD JUMP STOPS IF NECESSARY

5/16" +/-

FACE OF WALL

FASTNER SECTION NOT SHOWN.

FACE MOUNT FINISH PLATE  
\* (REDUCES CLEARANCE)

OPTION: RECESS FINISH PLATE

AXEL  
STUD  
#2

MS #2

1/8"  
HOLE  
MAX.

MS  
#2

1 3/4"


HIDDEN AGENDA 4 WIDTH RANGE 3-4"

HIDDEN AGENDA 6 WIDTH RANGE 4.5-6"

FF 8 WIDTH RANGE 3-8"

HAG

ENGROOVE INC.  
2/14/21  
HIDDEN AGENDA 4+6  
1/2"-1 3/8" DOOR THICKNESS  
AXEL STUD #2  
MOUNT STUD #2

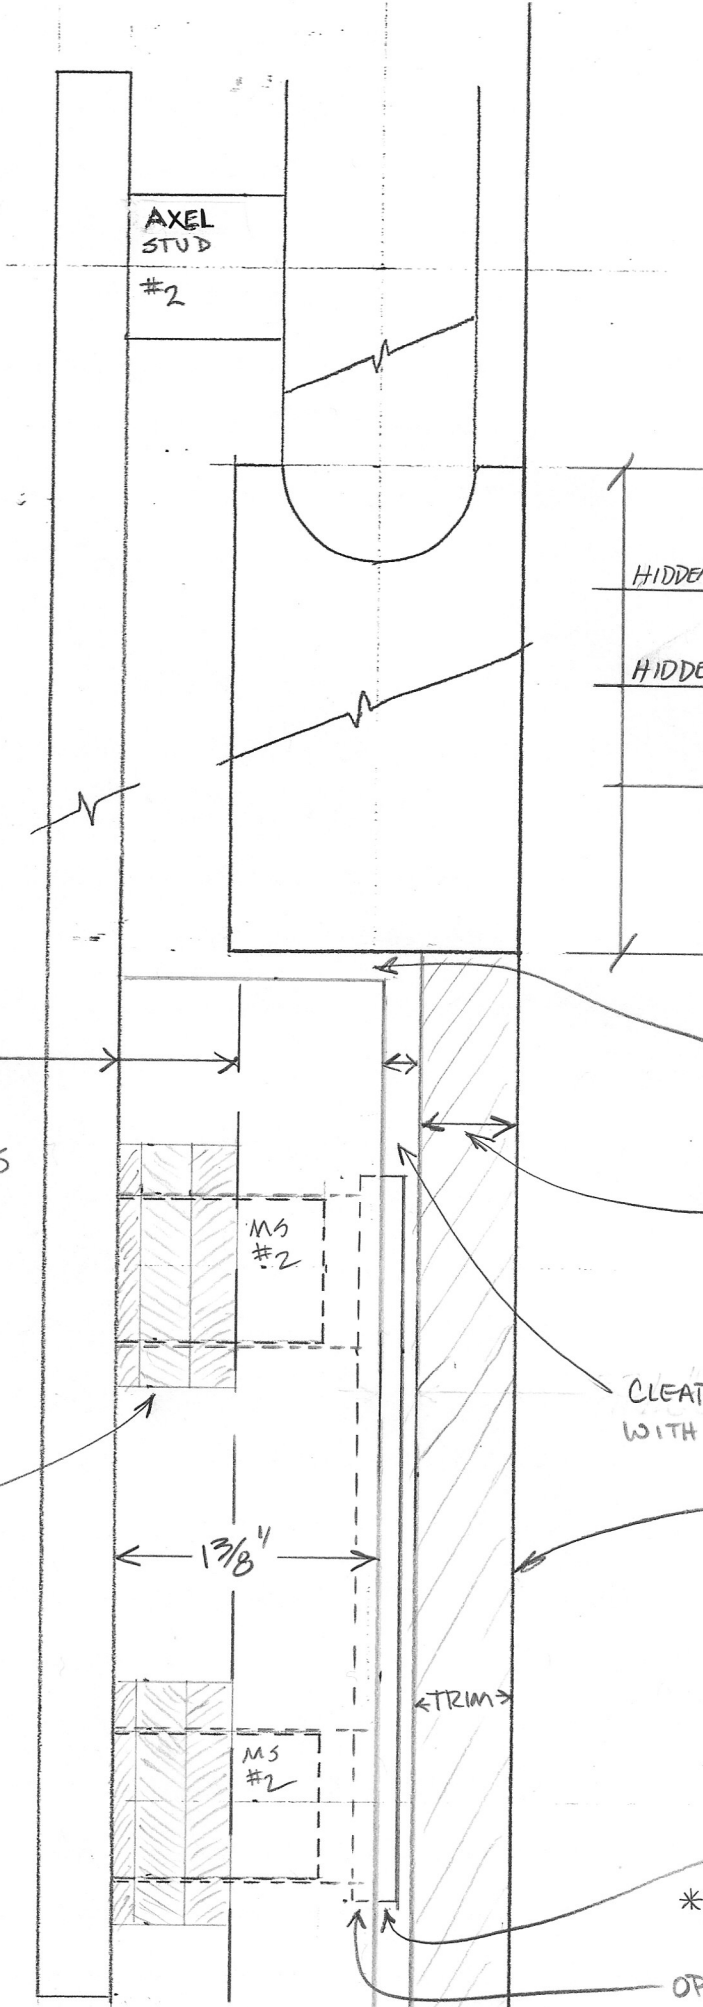

HIDDEN AGENDA 4 WIDTH RANGE 3"-4"

HIDDEN AGENDA 6 WIDTH RANGE 4 1/2"-6"

PANEL THICKNESS  
OPTIONS 1/2"-1 3/8"  
RELATIVE TO TRIM THICKNESS  
AND OFFSETS

GAP AT TOP OF DOOR  
NOT TO EXCEED 3/16"  
ADD JUMP STOP IF NECESSARY

OPTION; TRIM THICKNESS  
RELATIVE TO PANEL  
THICKNESS AND  
OFFSET.

CLEARANCE ADJUSTABLE  
WITH STUD SPACERS,

FACE OF WALL

SPACERS OPTIONAL  
RELATIVE TO PANEL  
THICKNESS AND  
TRIM THICKNESS

1 3/8"

TRIM

FACE MOUNT FINISH PLATE  
\* (REDUCES CLEARANCE)

OPTION: RECESS FINISH PLATE