

# FLUA®



**FAVOR INS R TRIMLES**



---

The series designed with a vertical and hidden deep light source. It's light hole is small. It can provide sufficient brightness, at the same time, it is good to prevent the direct light of your eyes. Complete range of products offer a variety of installation, different power wattages and appearance for options.

---

<b>Designer</b>	FLUA
<b>Sales status</b>	On Sale
<b>Product classification</b>	Interior
<b>Model</b>	178312EDT

---

[WWW.FLUA.COM](http://WWW.FLUA.COM)


## Installation information

Area	Ceiling
Method	Recessed
Cut hole size	Φ100mm
Embedded height	/

## Technical general

System power	11.4W
Flux	388lm
Beam angle	28°
Material	Aluminum
Appearance color	PAW
Size	140*90*110mm
Adjustable angle	Available
Ingress protection	IP20
Input voltage	220-240VAC
Electrical level	Class II

## Photometric graph

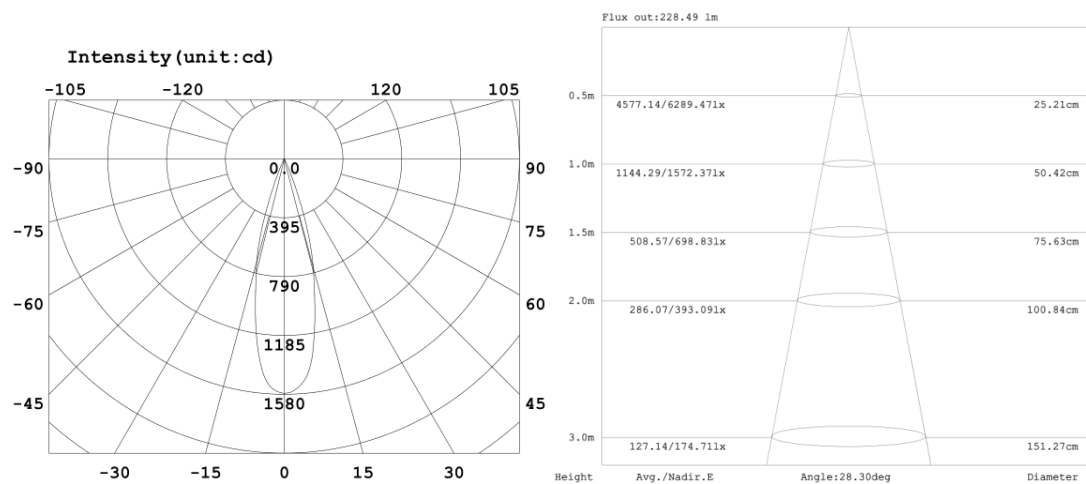

## Electrical parameters

Driver brand	DRIARTE
Driver type	FLMT12W500T(5 years)
Electrical installation	External
Dimming mode	TRIAC dimming

---

## Light source parameters

Brand	FLUA
Type	LT-A3009A
Power	9.5W
Light color	WW
Color temperature	3000K
CRI	90

---

## Other options


Beam angle	19°
Color temperature	2700K 4000K
Color	/
Appearance color	PAB

---

# FLUA®

3D module

Line drawing

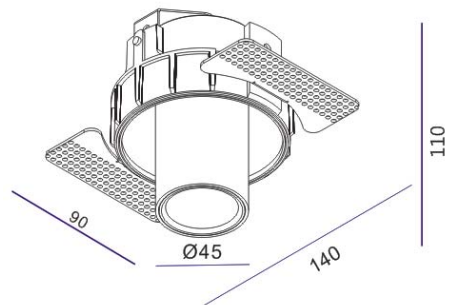

Unit: mm

## Instructions

**Accessory Set**

**1** hole pattern  
Ø100mm  
5-25mm

**2** Disassemble

**3**

**4** Adjustable

**5**

**6**

**7** \*RED  
BLACK  
CLICK

**8**

**9**

Dimmable