

FLUA®



COMET ON



The series of 17mm light outlet, provide sufficient light brightness, It's the representative of "see the light but not fitting", trimless makes the concise ceiling perfect.

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	215211A

WWW.FLUA.COM


Installation information

Area	Ceiling
Method	Surface Mounted
Cut hole size	/
Embedded height	/

Technical general

System power	10.5W
Flux	353lm
Beam angle	15°
Material	Aluminum,
Appearance color	PAW
Size	Φ200*43.5mm
Adjustable angle	Not available
Ingress protection	IP20
Input voltage	220-240VAC
Electrical level	Class I

Photometric graph

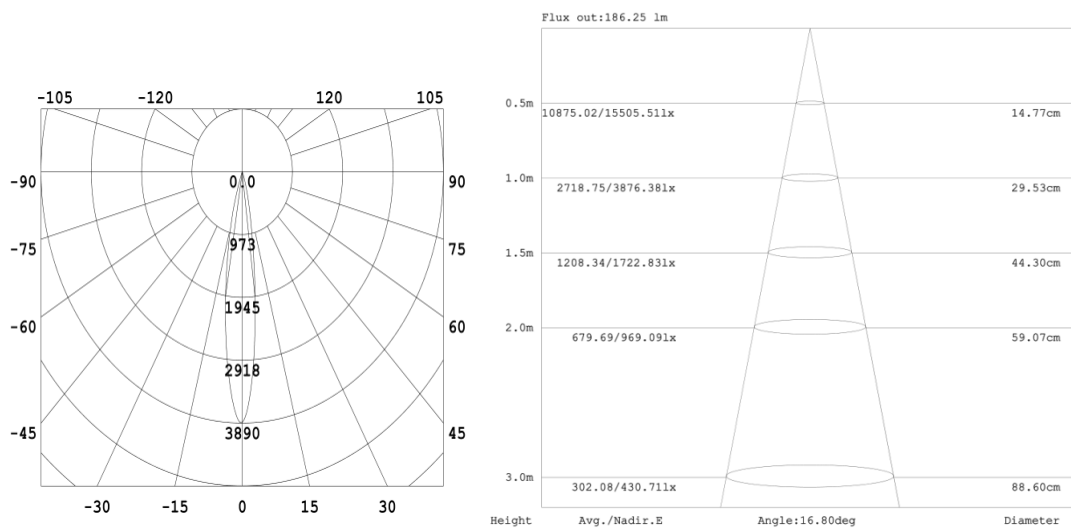

Electrical parameters

Driver brand	FLUA
Driver type	FLUA009H0700NCMB
Electrical installation	Build in

Light source parameters

Brand	CREE
Type	XHP35A
Power	8.4W
Light color	WW
Color temperature	3000K
CRI	90


Other options

Beam angle	/
Color temperature	4000K 5000K
Color	/
Appearance color	PAB
Dimming model	215211DT
Dimming mode	TRIAC dimming
Driver brand	HEP
Driver type	LMTC10W700-Z
Input voltage	220-240VAC

3D module



Line drawing

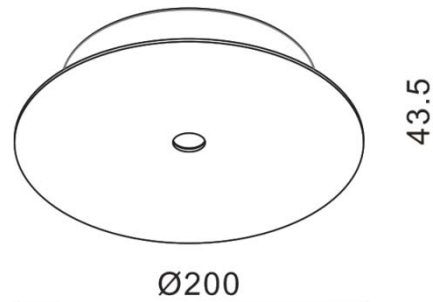

Unit: mm

Instructions

Unit: mm

