



DIAMOND IV

#### Features:

Lightweight and durable helmet meeting a wide range of standard performance requirements. Available with a choice of ratchet or Zip adjustment for adaptability. Compatible with a wide range of safety products and metal-working accessories (such as Eye wear, Ear muff etc..) to provide the complete solution for your application. Conformed for use at temperatures ranging from 10°C to +50°C. Available in a range of 6 colors for identification purposes. Sturdy UV resistant HDPE Safety helmet without ventilation having absorbent sweat band, LDPE harness and ratchet or zip adjustment property.

## DIAMOND IV

#### Material used

Shell: Non ventilated UV resistant HDPE

Harness: Plastic harness LDPE

Chin strap: Polyamide

#### Sizes:

Adjustable (53-63 cm)


#### Available Colors:

Green, Orange, Red, Blue, Yellow, White


#### Specifications:

Weight: 350-365 g(without and with chin strap)

No. of attachment points: 8

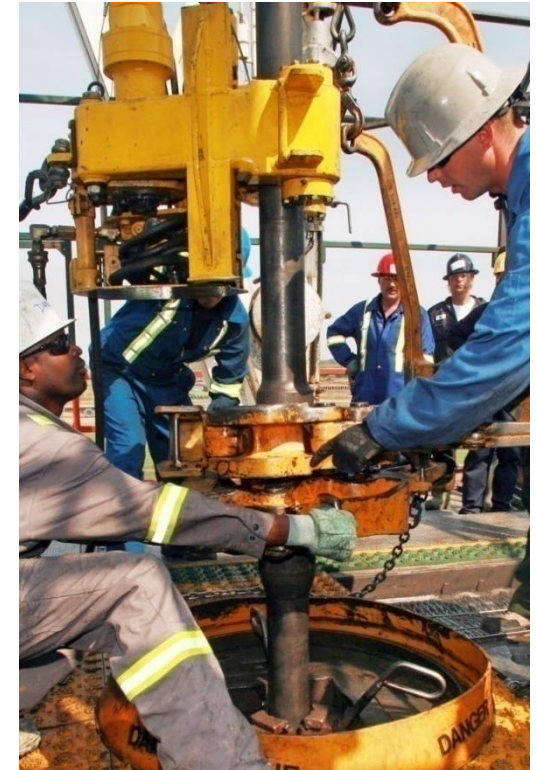

## SAFETY HELMET



*Non Ventilated ratchet  
adjusted Industrial safety  
helmet*



#### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)



## Head Shield!!

### Limits to use

The helmet life is affected by several factors, such as cold, heat, chemical products, sun light or misuse. A daily check should be performed in order to identify any sign of rendering (cracks, flaws) the helmet, its harness and accessories fragile. Any helmet having been subject to a strong shock or having wear signs should be replaced. Under normal usage conditions, this protective helmet should provide proper protection for 2 up to 3 years after the first usage, or 5 years according to the manufacturing date (written inside). If a sensitive person has an allergic reaction, remove the helmet and ask for medical advice.

### Instructions for storage:

It should be stored in a dry cool place away from light, frost and in a location granting that no chemical product or sharp object bends it by falling above.

---

*Mallcom  
Helmet provides superior  
protection to the skull and  
excellent durability*

---

### Instructions for cleaning:

This protective helmet may be cleaned and disinfected by means of a cloth impregnated in a low concentration cleaning solution. One shall not use any abrasive or corrosive chemical product. If this helmet cannot be cleaned by using this method, it should be replaced.

### Performances:

This helmet complies with the European directive 89/686, notably regarding ergonomics, innocuousness, comfort and ventilation, and with EN397:2012 (-10°C / +50°C) standard. EC type examination and testing performed by in house test facility.

### Applications:

Steel manufacturing industries  
Aluminum Smelting  
Foundries & Casting  
Metal recycling  
Refractory production  
Cement manufacturing industries  
Construction sites



### MALLCOM INDIA LTD

EN 12, Sector V, Salt Lake City  
Kolkata 700091, India

T: +E : [safety@mallcom.in](mailto:safety@mallcom.in), w : [www.mallcom.in](http://www.mallcom.in)