

# NOMADIC COOLING CO.



With the Nomadic Cooling **X<sup>2</sup>**, you can fearlessly wander the uncharted territories of off-grid exploration. This low-profile, powerful AC unit needs no ties to conventional engines or shore power. Embrace true liberation and savor the untamed thrill of boundless freedom!

**LOW PROFILE POWER**  
48V | 24V | 12V




Shrouds available in Arctic White or Obsidian Black.

Revolutionize your travels with the **X<sup>2</sup>**, where engineering prowess meets the adventurer's spirit. With its low profile and uncompromising power you can traverse the wilderness with unrivaled confidence.



## FLUSH MOUNT INTERNAL FASCIA

Powder-coated and constructed with strong, lightweight aluminum, with a sleek internal faceplate paired with a modern, crisp LCD panel (right).

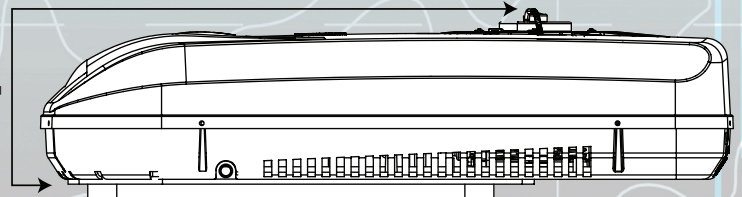

Our lowest profile AC unit yet!  
48V, 24V and 12V systems available!

## BEYOND COOL

The all new **X<sup>2</sup>** provides 12,150 BTU of ultimate cooling power!  
(48V model)



# GO FURTHER IN COMFORT







**OFF-GRID FREEDOM**  
48V | 24V | 12V



**COMPACT AND POWERFUL**

As every well-traveled nomad knows, rooftop space is always at a premium on your van, RV or rig. Weighing in at just 44 lbs, the X<sup>2</sup> is not only one of the lowest profile rooftop AC units on the market, it also has one of the smallest footprints!

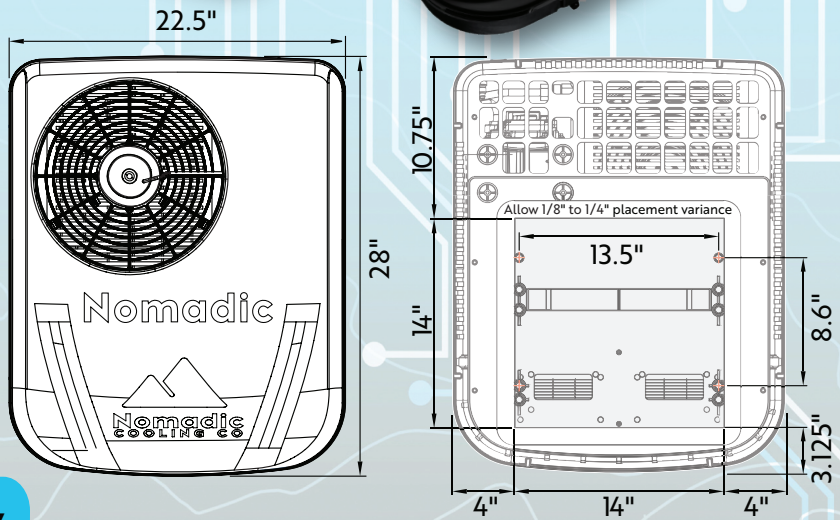

 MODEL	48V	24V	12V
Current ECO Mode	8A	16A	32A
Current MAX Mode	16A	31A	53A
Power ECO Mode +Hi Fan	384W	384W	504W
Power MAX Mode +Hi Fan	768W	744W	636W
Min Cooling Temp ECO Mode	65.3°F	63.1°F	64.7°F
Min Cooling Temp MAX Mode	57.1°F	57.9°F	59.9°F
Cold Air Flow MAX Mode (cfm)	3,489	3,064	2,714
Cold Air Flow ECO Mode (cfm)	2,497	2,743	2,621
Rated Cooling Capacity (BTU)	12,150	10,280	8,188
Power Cord Specification	10 AWG	8 AWG	4 AWG
Fuse Size	30A	50A	70A
Refrigerant	R134a @ 450g ± 30g		
Refrigerant Oil	POE68		
Speed Range	1,000 to 3,000 RPM		
Weight	44.0 lbs		
Interior Faceplate Dimension	16¼" x 16¼" (Flush mount)		
Noise (Decibels)	≤ 60 dBa		
Operation Modes	Auto/ECO/MAX/Fan		
Min-Max Temp Settings	54°F to 89°F		
Warranty	One (1) Year + Extension Option		

**OFF GRID FREEDOM**

Unlike traditional air conditioners, the X<sup>2</sup> operates independently without the need for a connection to the engine or shore power. This means you can enjoy cool comfort even in remote locations, away from traditional power sources.

**Additional Features:**

- Brushless Fan Motor
- 14" x 14" Standard Opening
- Stainless Steel Fasteners
- Fire-Resistant Wrapping
- Remote Control Included

