

NOMADIC COOLING CO.




Available with a 48V, 24V or 12V compressor, the Nomadic Cooling X³ is the go-to cooling system for explorers and adventurers... perfect for Overlanders, RV'ers, Van Campers, or anyone looking to Go Further In Comfort!

MOST POWERFUL AC UNIT
48V | 24V | 12V



**GO FURTHER
IN COMFORT**

Like its predecessors, the X³ is a stand-alone air conditioner that does not need to be connected to the engine or shore power to operate, providing the freedom of true off-grid living.

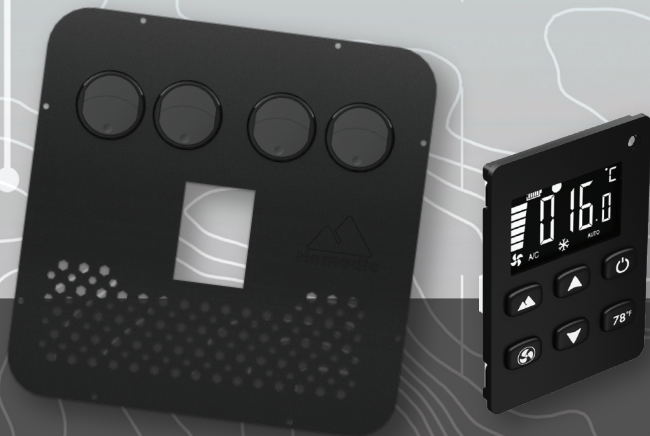


FLUSH MOUNT INTERNAL FASCIA

Sleek internal faceplate paired with a modern, crisp LCD panel. Powder-coated and constructed with strong, lightweight aluminum. Available in Obsidian Black.

BEYOND COOL









The Nomadic Cooling X³ provides maximum cooling capacity for your mobile living space, offering powerful 48V, 24V and 12V models.

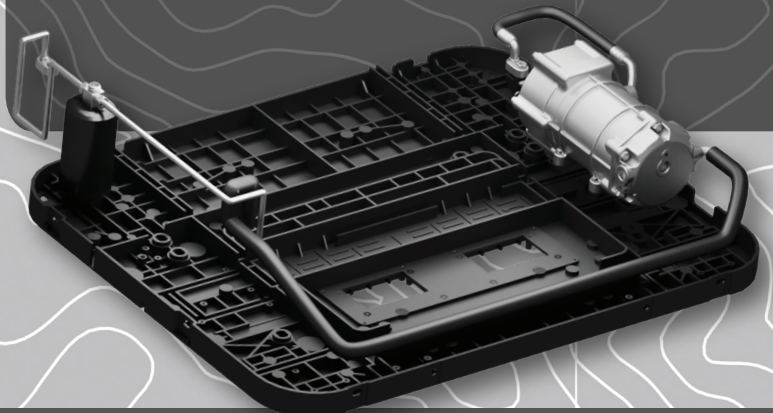

www.NomadicCooling.com

ECO FRIENDLY POWER
48V | 24V | 12V

Shrouds available in Arctic White or Obsidian Black.

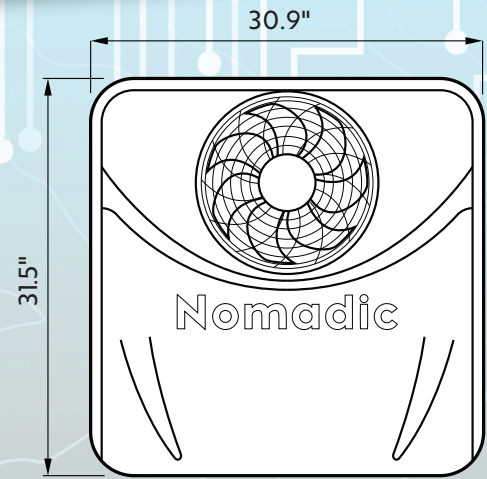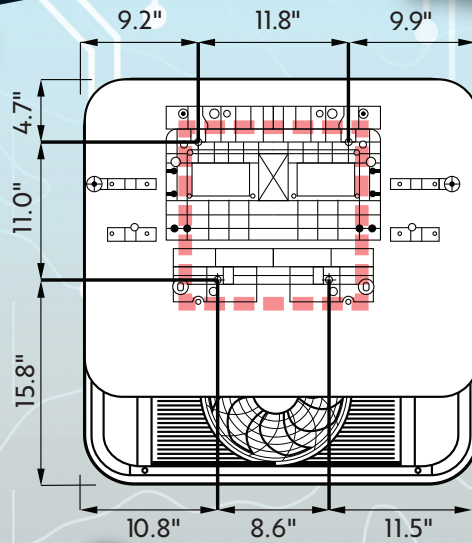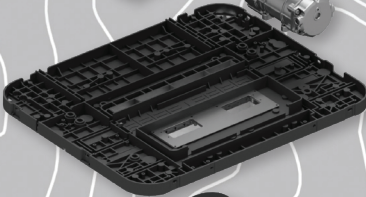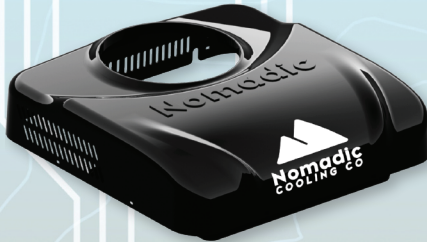

Low Profile



MODEL	48V	24V	12V
Current ECO Mode	16A	31A	53A
Current MAX Mode	17A	40A	91A
Power ECO Mode +Hi Fan	480W	576W	708W
Power MAX Mode +Hi Fan	816W	960W	1,092W
Min Cooling Temp ECO Mode	69.4°F	58.9°F	50.4°F
Min Cooling Temp MAX Mode	65.9°F	49.4°F	49.2°F
Cold Air Flow ECO Mode (fpm)	3,895	2,562	2,122
Cold Air Flow MAX Mode (fpm)	4,042	2,423	2,167
Fuse Size	30A	60A	125-150A
Refrigerant	R134a @ 600g ± 30g		
Refrigerant Oil	POE68		
Speed Range	1,000 to 3,000 RPM		
Weight	57.3 lbs		
Interior Faceplate Dimension	16¼" x 16¼" (Flush mount)		
Noise (Decibals)	≤60 dBa		
Operation Modes	Auto/ECO/MAX/Fan		
Min-Max Temp Settings	60°F to 86°F		
Warranty	One (1) Year w/ Extension Opt.		

- Cool X3 Features:**
- Flush Internal Faceplate
 - Sleek Control Panel
 - Brushless Motor
 - 14" x 14" Opening
 - Remote Control
 - One (1) Year Warranty
 - Extended Warranty Available

