

Excel Enbeam OM4 Multimode SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core 50/125 Eca Bl...

Item Code: 205-385

excel
without compromise.



Buy Now From

Cable Intelligence 



✕ Water Resistant & UV Resistant

✕ Duct grade - Rodent resistant

✕ Sequentially metre marked

✕ Cut to length service

✕ Euroclass: Eca

✕ 25 Year system warranty

Product Overview

Enbeam OM4 Multimode SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core 50/125 Eca Black.

Excel steel wire (SWA) OM4 50/125µm armoured loose tube optical fibre cables have been designed specifically for direct burial and the most demanding of installations.

These cables are constructed from standard single loose tube cables which are then packed into a flexible but strong fibreglass water blocking strength member.

An internal sheath with a rip cord is inserted with lengths of steel wire armouring over the top and then an overshath is added providing a strong but flexible cable assembly.


Product Specifications

Feature	Values
Number of Cores	24
Type of tube	Loose tube
Number of fibres per tube	24
Fibre type	Multi mode 50/125
Category	OM4
Armouring	yes
Rodent resistant	yes
Outer sheath material	Copolymer, thermoplastic (LS0H)

Item Code: 205-385

Outer sheath colour	Black
Reaction-to-fire class according to EN 13501-6	Eca
Halogen free (acc. EN 60754-1/2)	yes
Flame retardant	In accordance with EN 50399
Outer diameter approx.	10.5 mm

Cross-section diagram

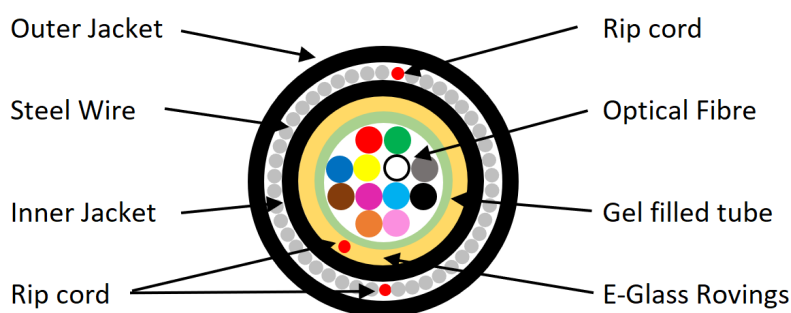

Cable specifications

Features	Values	
Tensile Strength	3000N	
Crush Resistance	1500N/m	
Torsion	± 180 °	
Temperature performance	Installation	-30°C to +70°C
	Operation	-30°C to +70°C
	Storage	-30°C to +70°C
Loose tubes	1	
Loose Tube ID/OD	2.6/3.5 ± 0.1 mm	
Peripheral Strength Member	Glass Yam	
Armoring	Thickness	0.6 mm
	Material	Soft Zinc Coated Steel Wires
Outer Sheath	Thickness	1.4 mm (Nominal)
	Material	LSZH

Item Code: 205-385

Ripcord	Number	3
	Material	Polyester
Bending Radius	Short term	20 x Diameter
	Long term	10 x Diameter
Attenuation	@850nm	≤ 3.0 dB/km
	@1300 nm	≤ 1.0 dB/km
Core Cladding Concentricity Error		≤ 1 µm
Cladding Diameter		125 ± 1 µm
Cladding Non-circularity		≤ 1 %
Coating Diameter		250 ± 10 µm

Standards

Applicable Standard	Subject
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
IEC 60754-2:2014+A1:2020	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
IEC 60793-1-1:2017	Optical fibres - Part 1-1: Measurement methods and test procedures - General and guidance
IEC 60793-1-20:2014	Optical fibres - Part 1-20: Measurement methods and test procedures - Fibre geometry
IEC 60793-1-21:2001	Optical fibres - Part 1-21: Measurement methods and test procedures - Coating geometry
IEC 60793-1-22:2001	Optical fibres - Part 1-22: Measurement methods and test procedures - Length measurement
IEC 60793-1-30:2010	Optical fibres - Part 1-30: Measurement methods and test procedures - Fibre proof test
ITU G.652.D	Characteristics of a single-mode optical fibre and cable
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements

Item Code: 205-385

EN 50575: 2014 + A1: 2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
ANSI/TIA 568-3.D	Optical Fiber Cabling and Components Standard
ANSI/TIA/EIA 598-D	Optical Fibre Cable Colour Coding
RoHS	Restriction of Hazardous Substances - Compliant
WFD	Compliant to Waste Framework Directive
SCIP	Compliant - Does Not Contain Substances of Concern in Products

Part Number Table

Part Number	Description
205-385	Excel Enbeam OM4 Multimode SWA Direct Burial Fibre Optic Cable Loose Tube 24 Core 50/125 Eca Black

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at websales@cableintelligence.co.uk