



# versatile™ 4C Mailbox, 12 High Suite

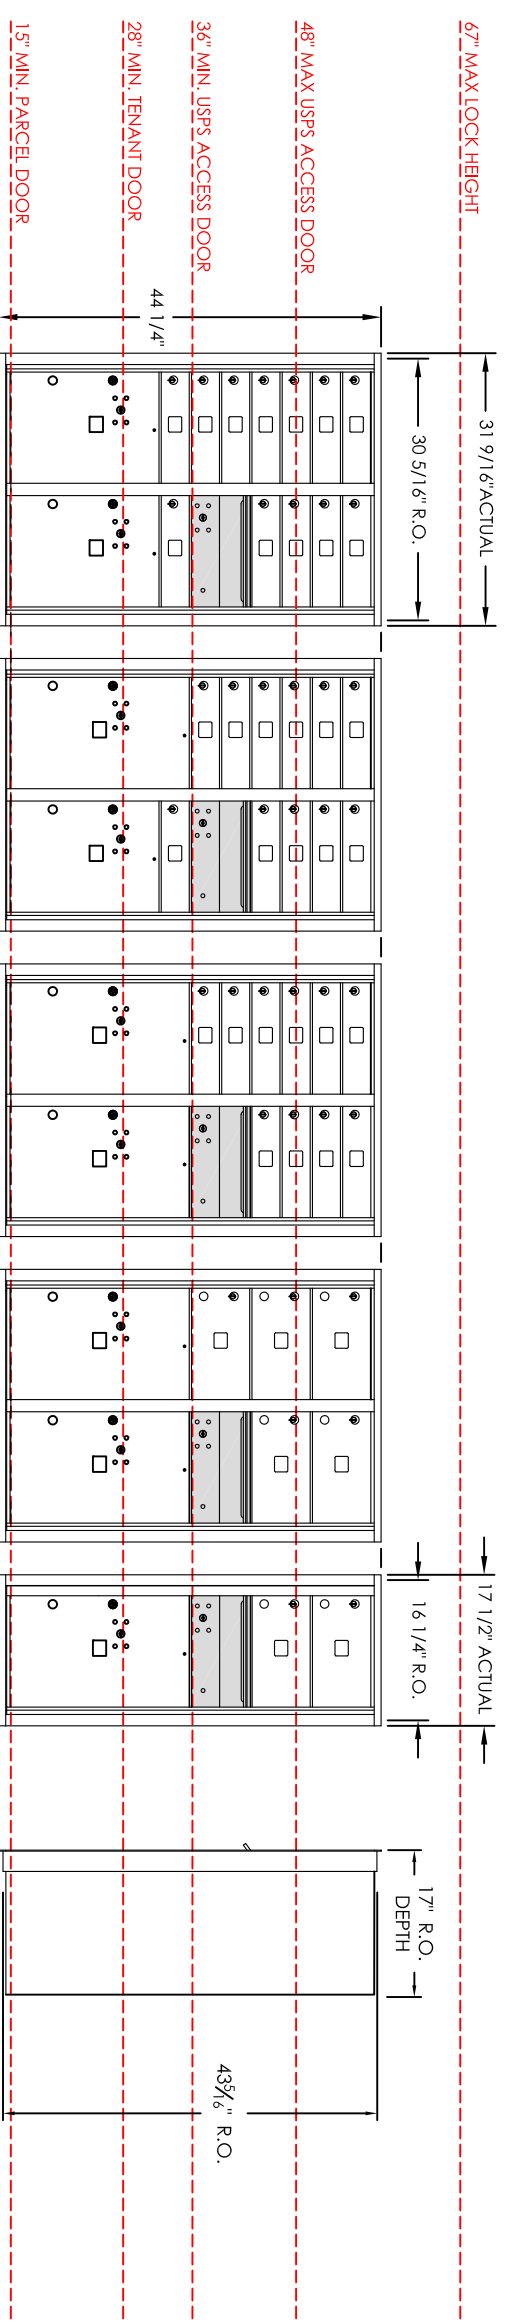

4C12D-12      4C12D-11      4C12D-10      4C12D-05      4C12S-02

Floor

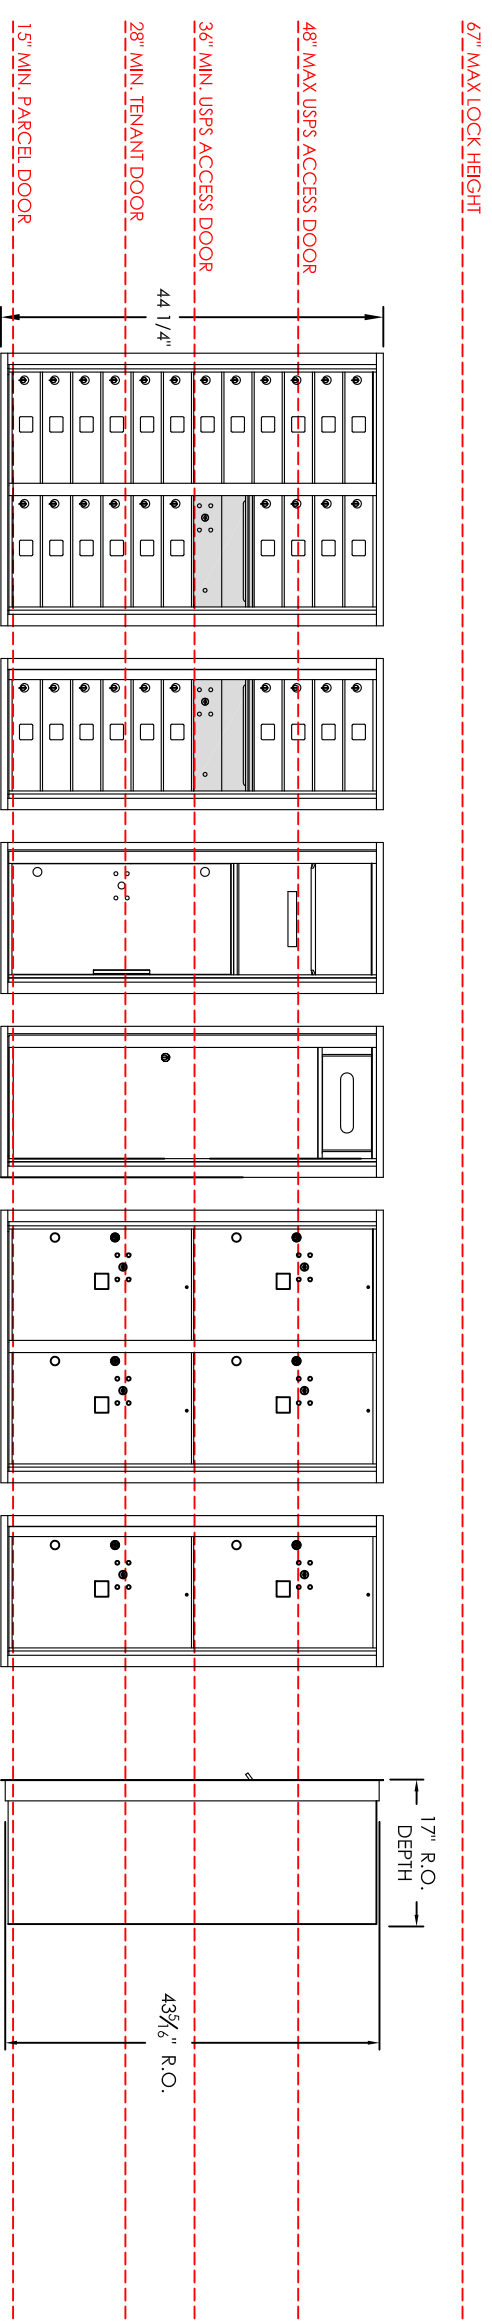

4C12D-22\*      4C12S-10\*      4C12S-HOP      4C12S-BIN      4C12D-4P      4C12S-2P

Floor

**NOTES:**

1. Below are the USPS STD-4C installation guidelines:

- a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36" - 48" AFF.
2. Modules noted with \* do not meet USPS STD-4C guidelines above.

PRODUCT SERIES: versatile™ 4C Mailbox 12 High Suite

<p><b>BudgetMailboxes</b> Best Brands. Best Prices. .com</p> <p>WebLife Stores LLC PO Box 20338, Panama City Beach, FL 32417 www.budgetmailboxes.com • (866) 707-0008</p>		MODEL <b>4C12H</b>	REV <b>A</b>
SCALE <b>NONE</b>	LAST REV DATE <b>5/15/2014</b>		
DRAWING NUMBER <b>4C12HCS</b>	DRAWN BY <b>AFD</b>	SHEET	1 OF 1