

BOLT 2.0



User Manual

SAFETY INSTRUCTIONS

Thank you for choosing and purchasing our E-Bike. For your driving safety, please read this manual carefully to ensure that you can follow the correct instructions, safety warnings and precautions before using it.

- Strictly abide by local laws and regulations and traffic laws. The company is not responsible for any consequences caused by violation of the above laws and regulations.
- Strictly follow the instructions in the manual for corresponding operations. The company is not responsible for any consequences caused by improper use, speeding, overloading etc...
- Do not use this E-Bike to do stunts, it will increase the probability of injury and damage to the E-Bike.
- Please always wear a helmet.
- Do not leave the battery near fire or heat sources.
- Please regularly check whether the brake performance is good.
- Please do not modify, repair or disassemble the product on your own.
- Avoid using used, defective and/or aftermarket batteries.
- People who should not ride the product include:

i. Anyone under the influence of alcohol or drugs.

ii. Anyone who suffers from disease that puts them at risk if they engage in strenuous physical activity.

iii. Anyone who has problems with balance or with motor skills that would interfere with their ability to maintain balance.


iv. Anyone whose weight is outside the stated limits (see Specifications).

v. Pregnant women.

SPECIFICATIONS

Model	BOLT 2.0
Max Load	120KG
Motor	500W/48V
Battery	14Ah
Suspension	Front spring suspension
Max Speed	25km/h
Derailleur	Rear: Shimano 7
Max Distance	40km (Pure Power)
Max Distance	70-110km (Pedal assist)
Sensor	Speed Sensor
Frame	Aluminum
Brake Type	Hydraulic brakes
Tire Size	20" X 4.0"
T : D	
Tire Pressure	Min: 5 psi Max:30 psi
Charger	Min: 5 psi Max:30 psi 42V/2A
Charger	42V/2A

PARTS DIAGRAMS

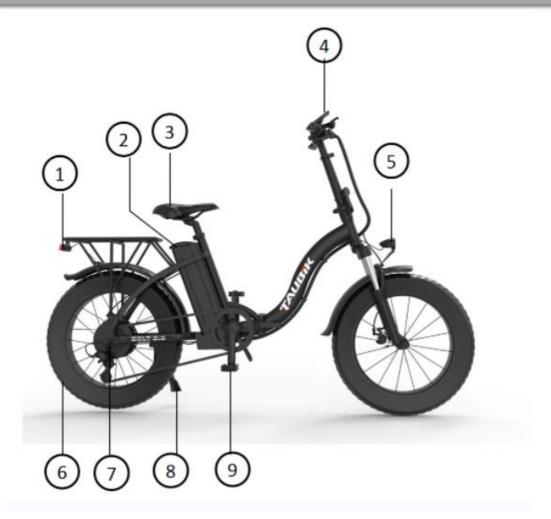

Features & Parts


- 1. Brake light
- 2. Battery Pack
- 3. Seat
- 4. Brake Lever
- 5. Headlight

- 6. 20inch Tire
- 7. Rear Derailleur
- 8. Kickstand
- 9. Pedal



- 1. Left Brake Lever for front brake
- 2. LCD Display
- 3. Left shifter for front derailleur
- 4. Handlebar
- 5. LCD Display Button
- 6. Right shifter for rear derailleur
- 7. Bell
- 8. Thumb Throttle


DISPLAY PANEL

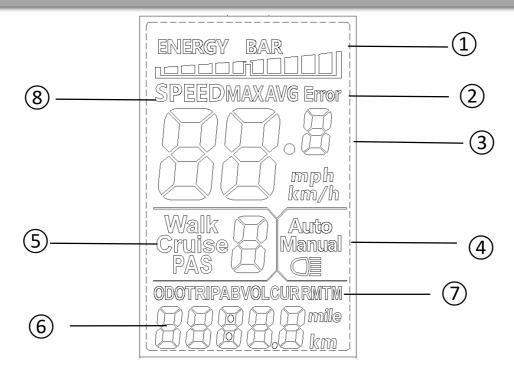

- 1) Battery Display: Indicates the Battery Capacity
- 2) Error: Indicates the Error Code
- 3) Speed Display:
 - MAX: Max speed
 - AVG: Average Speed
 - Mph: Miles per hour, km/h: Kilometer per hour
- 4) Headlight: Indicates the headlight on
- 5) Speed gear mode:
 - Walk: Pedestrian mode 5km/h
 - PAS: 5 speeds can be adjusted
- 6) Mileage Display
- 7) Function Display:
 - ODO: Total distance travelled
 - Trip A: Single Distance A
 - Trip B: Single Distance B
 - VOL: Battery Voltage

- CUR: Present current
- RM: Remaining Mileage
- TM: LCD startup time

DISPLAY BUTTON

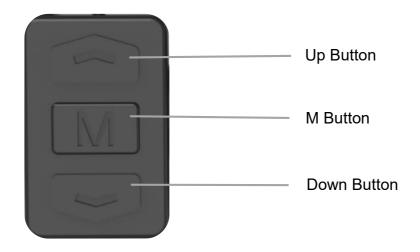

No.	Function	Operation Method
1	Power on / off	Press ' M ' 5 seconds
2	PSA Level 10km/h,14km/h,18km/h, 22km/h, 25km/h	Press the 'up button' speed +1, Press the 'down button' speed -1
3	Switch Mph & Km/h	Press ' M '+ ' UP'
4	Switch ODO,Trip,VOL,CUR,RM,TM	Press ' M' Once
5	Walk (Pedestrian mode)	Long Press ' Down ' Button when walking
6	Turn on/off headlight	Press 'up' 3 seconds

ERROR CODE

Error 1	Reserve		
Error 2	Brake Failure		
Error 3	Power assist sensor failure (riding sign)		
Error 4	6KM/H cruise		
Error 5	Real-time cruise		
Error 6	Battery undervoltage		
Error 7	Motor failure		
Error 8	Handlebar failure		
Error 9	Controller failure		
Error 10	Communication reception failure		
Error 11	Communication sending failure		
Error 12	BMS (wireless battery management system) communication failure		

CHARGING



Only use the provided charging cable to charge your BOLT 2.0 battery pack. Using any other unauthorized charger may cause damage to your battery pack.

CHARGING THE BATTERY PACK

- Ensure the EBIKE is turned off.
- Remove the battery pack from the battery dock.
- Ensure that the charging port is clean and dry.
- Make sure that there is no dust, debris or dirt inside the port.
- Plug the charger into a grounded wall outlet.
- The charging indicator light ON, the charger will be green.
- Connect the cable with the power supply (100V~240V; 50/60 Hz).

• Align and connect the 1-pin charging cable into the charging port of the battery pack.

DO NOT FORCE OR BEND THE CHARGING CABLE INTO THE CHARGING PORT, AS IT MAY CAUSE THE PRONG TO BEND OR BREAK.

OPERATING CONDITIONS

FAILURE TO FOLLOW ANY OF THE FOLLOWING SAFETY PRECAUTIONS CAN AND MAY LEAD TO DAMAGE TO YOUR DEVICE, VOID YOUR MANUFACTURER'S WARRANTY; LEAD TO PROPERTY DAMAGE, CAUSE SERIOUS BODILY INJURY, AND CAN LEAD TO DEATH.



Any BOLT 2.0 that does not work properly can cause you to lose control and fall. Inspect the entire device thoroughly before every ride, and do not ride it until any problems have been corrected.

KICKSTAND

Never ride your EBIKE with the kickstand down.

OPERATING YOUR Ebike

Make sure the battery pack is fully charged before the first Initial use. Before turning on your E-bike, sit on it like a standard bicycle to get comfortable with the device before using It with the motor.

GEARS

Your Ebike is equipped with 5 gears. The lowest gear (1) is for easier and uphill pedaling, and the highest gear (5) is for maximum speed on level or downhill terrain. Change gears only while pedaling.

The rear wheel contains a cassette with 5 sprockets. When the chain is around the largest sprocket you are in 1st gear, or the lowest gear. When the chain is around the smallest sprocket, you are in 5th gear, or the highest gear.

TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSES	SOLUTION
Motor will not engage Feels shaky when driving	 Low battery Battery loose or unplugged Severed wire connection Low tire pressure Wheel is not securely fastened Bearings in steering system are worn out 	 Recharge battery Make sure battery connections are secure Contact customer support Inflate to 40 psi Fasten wheel securely Replace bearings
Mileage not being recorded correctly	 Infrequently charged Defective or worn-out battery pack Cold temperature affecting battery performance Damaged battery due to incorrect or defective charger 	 Charge battery pack more often Replace battery pack Allow battery pack to reach room temperature and fully recharge it. Contact customer support
LCD monitor not working	 Low battery Display is broken Bad battery cells Faulty charger burns out display 	 Recharge battery pack Replace display Replace battery pack Contact customer support

PROBLEM	POSSIBLE CAUSES	SOLUTION
Brakes squealing	 Dirty brake pad Hard edges on new brakes Brake pads are too tight 	 Clean the brake pad Squealing will stop the more you ride Adjust brake pads to l- 2mm gap from wheel
Stiffness when steering	 Grime build-up in steering system Bearings in steering system are worn out 	 Clean steering system Replace bearings

The above table is only meant to act as a guide to help you figure out any problems you may have with your EBIKE. If you are unable to get your EBIKE to operate properly, please ask for support.

info@taubik.com