

Beckett Linear Chandelier

CC1307 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
Use minimum 90°C supply conductors.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 16077


800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.
The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

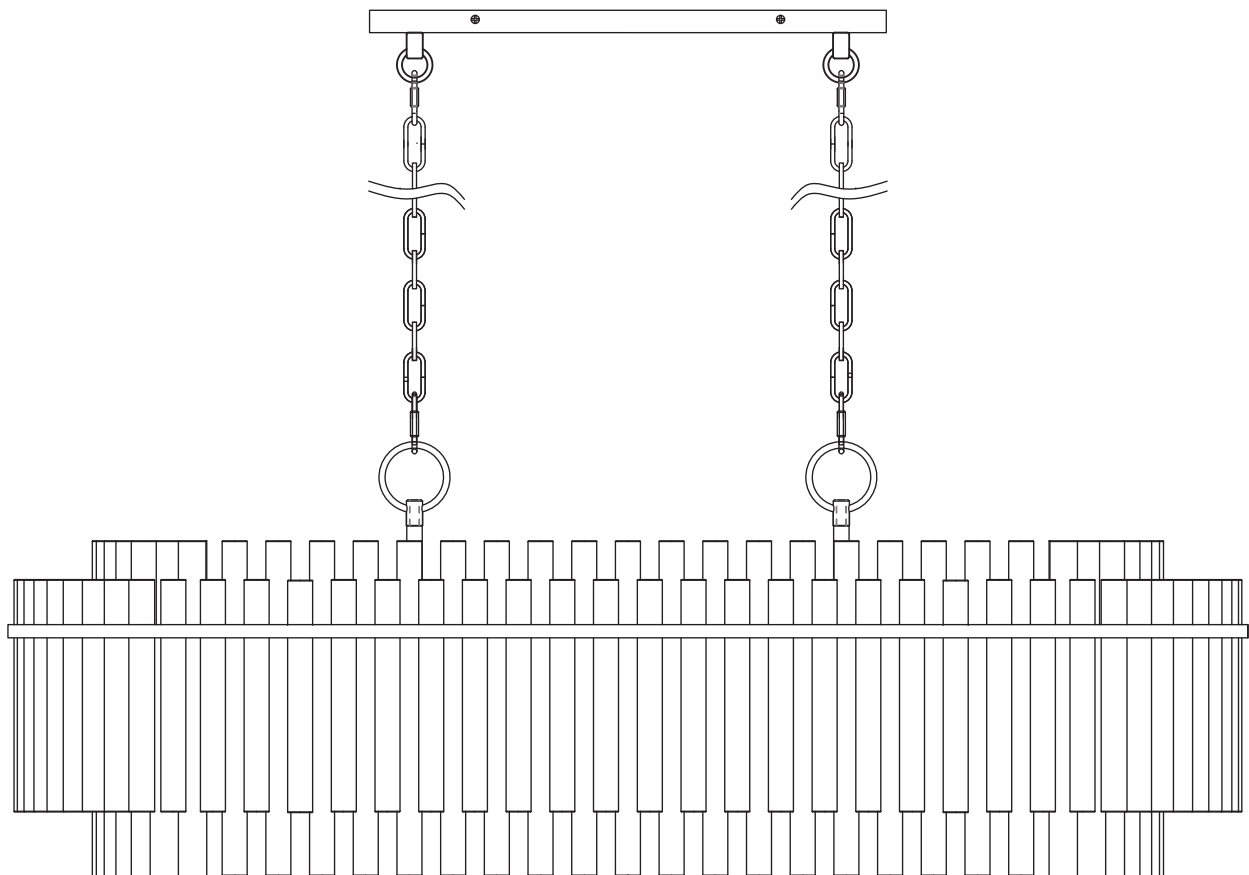

SAVE THESE INSTRUCTIONS!

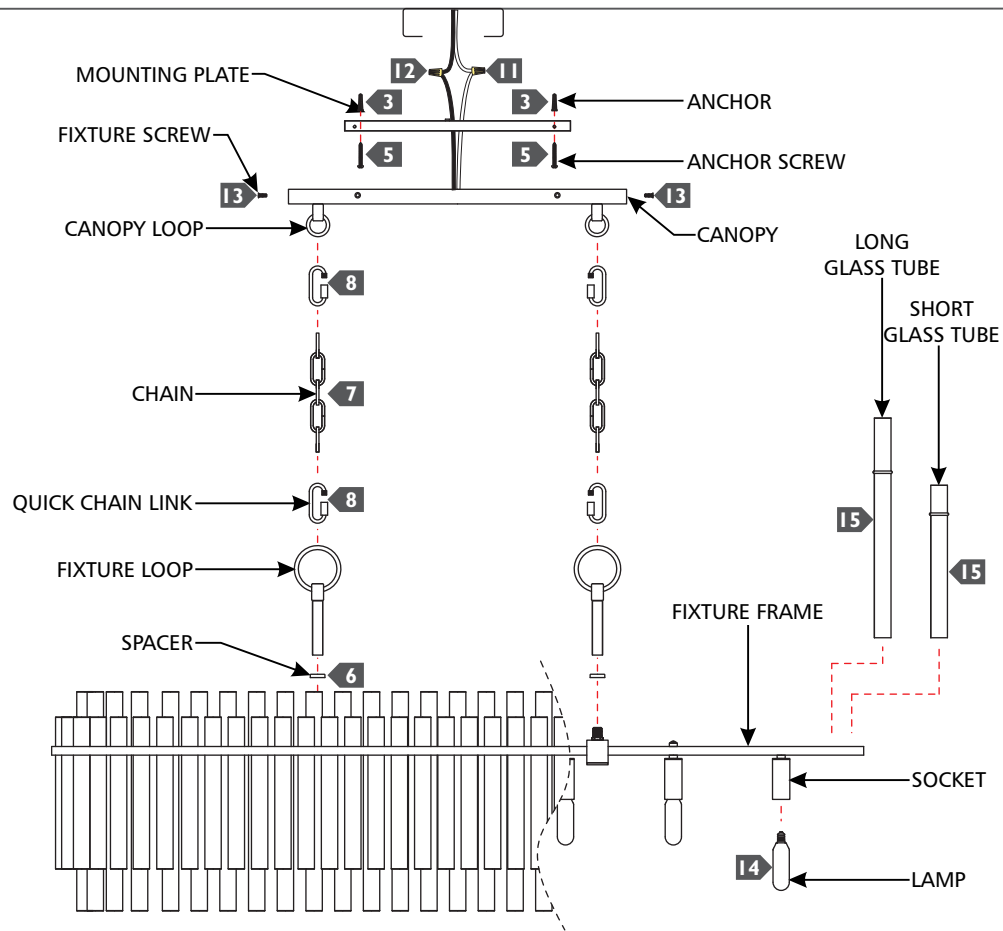1A

- 1** Temporarily install the mounting plate to the junction box.
- 2** Mark the anchor hole locations on the mounting plate and remove the mounting plate.
- 3** Drill appropriate size holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box.
- 5** Screw the anchor screws into the anchors.
- 6** Feed the fixture wires through the spacer and fixture loop, then screw both fixture loops onto the fixture.
- 7** Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
- 8** Install a quick link onto the chain and fixture loop, then install another quick link to the other end of the chain and canopy loop. Repeat steps 7 and 8 for the other side.
- 9** Weave the cord through the chain, canopy, and out of the electrical box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the electrical box, place the canopy onto the mounting plate, and secure it in place by screwing in the fixture screws.
- 14** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 15** Install the long glass tubes around the inner part of the fixture frame, then install the short glass tubes around the outer part of the fixture frame.